



# FK 8-2

## Actuator and Sensor Receptacle – Front Mount




### Features

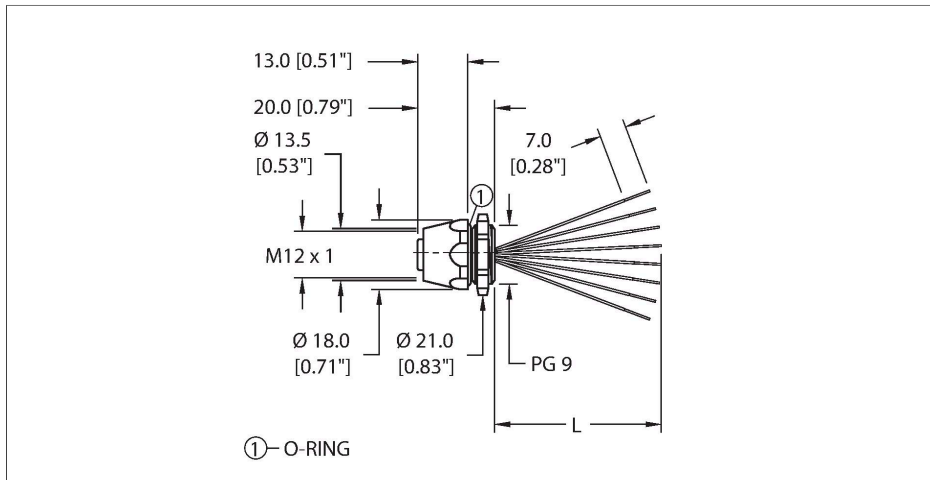

- M12, Female, Receptacle, 8-pin
- Mounting thread: PG9

### Contact assignment

Connector A



### Circuit Diagram

1	WH
2	BN
3	GN
4	YE
5	GY
6	PK
7	BU
8	RD


### Technische Daten

Type	FK 8-2
ID	U1132-022
Connector A	Female, M12 × 1, A-code
Design specification	Acc. to IEC 61076-2-101
Number of contacts	8
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector seal	O-ring, Plastic, FKM/FPM
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.4 ... 1.8 Nm (note max. torque of mating connector!)
Mounting orientation	Front mount
Panel seal	O-ring, NBR
Mounting thread	PG9
Locknut	Brass, CuZn, Nickel-plated
Receptacle mounting torque	2.5...6.8 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP68
	NEMA: 1, 3, 4, 6P
Total number of conductors	8
Length (L)	2 m
Conductor material	TC (tinned copper)
Conductor insulation material	PVC


## Technische Daten

Conductor size	24 AWG [Similar to 0.25 mm <sup>2</sup> ]
Conductor colors	WH, BN, GN, YE, GY, PK, BU, RD
<b>Electrical properties at +20 °C</b>	
Rated voltage	60 V <sub>AC</sub> /75 V <sub>DC</sub>
Current	2 A
<b>Mechanical and chemical properties</b>	
Ambient temperature range (static)	-40...+105 °C
Approvals	UL 2238 CE UKCA RoHS
<b>Note</b>	
- We reserve the right to make technical alterations without prior notice.	


### Mounting hole - Through



### Mounting hole - Threaded

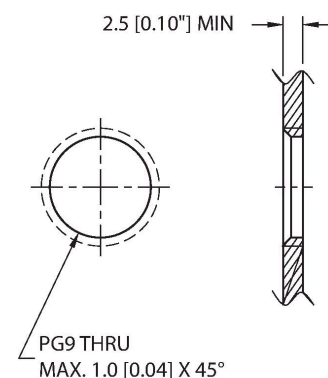


### Front panel mounting

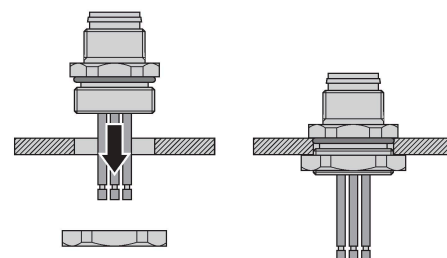


Montagezubehör

LOCKNUT-PG9-BRASS-(10/BAG) 100016624




Locknut, PG9, Brass, Nickel-plated, 10 per bag

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1) 100008955



1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.

FK(S)FD-TOOL A2550



Tool, knockout hole punch, receptacle-mounting hole. Accommodates PG9 threads.