




EXACT12, 8XM12, 5 POL.

Backside plug. spring terminals

5-pole  
pluggable rear connection  
Spring clamp plug-in terminals  
with LED for digital PNP-signals 24 V DC  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
flat gasket included

Link to Product

Illustration

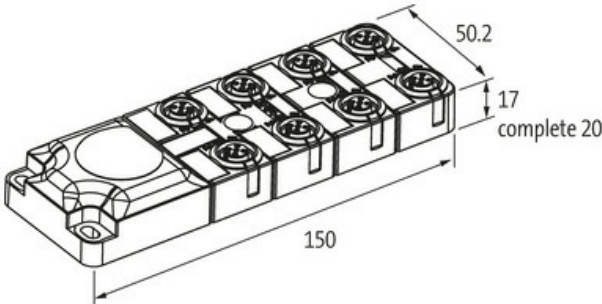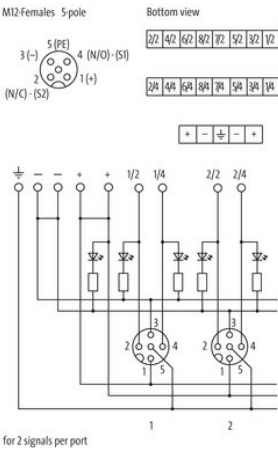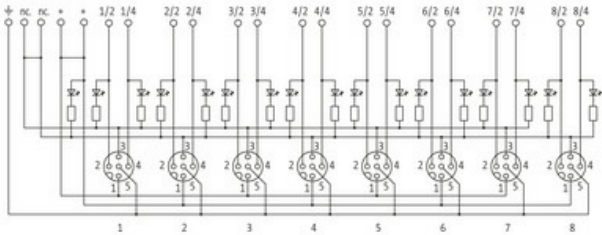

Product may differ from Image



Technical Data	
Operating voltage	24 V DC
Operating current per contact	max. 4 A
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 2× 8 A
General data	
Temperature range	-20...+70 °C
Contact Layout	

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2)	

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879311205
eClass	27143423
Packaging unit	1.000