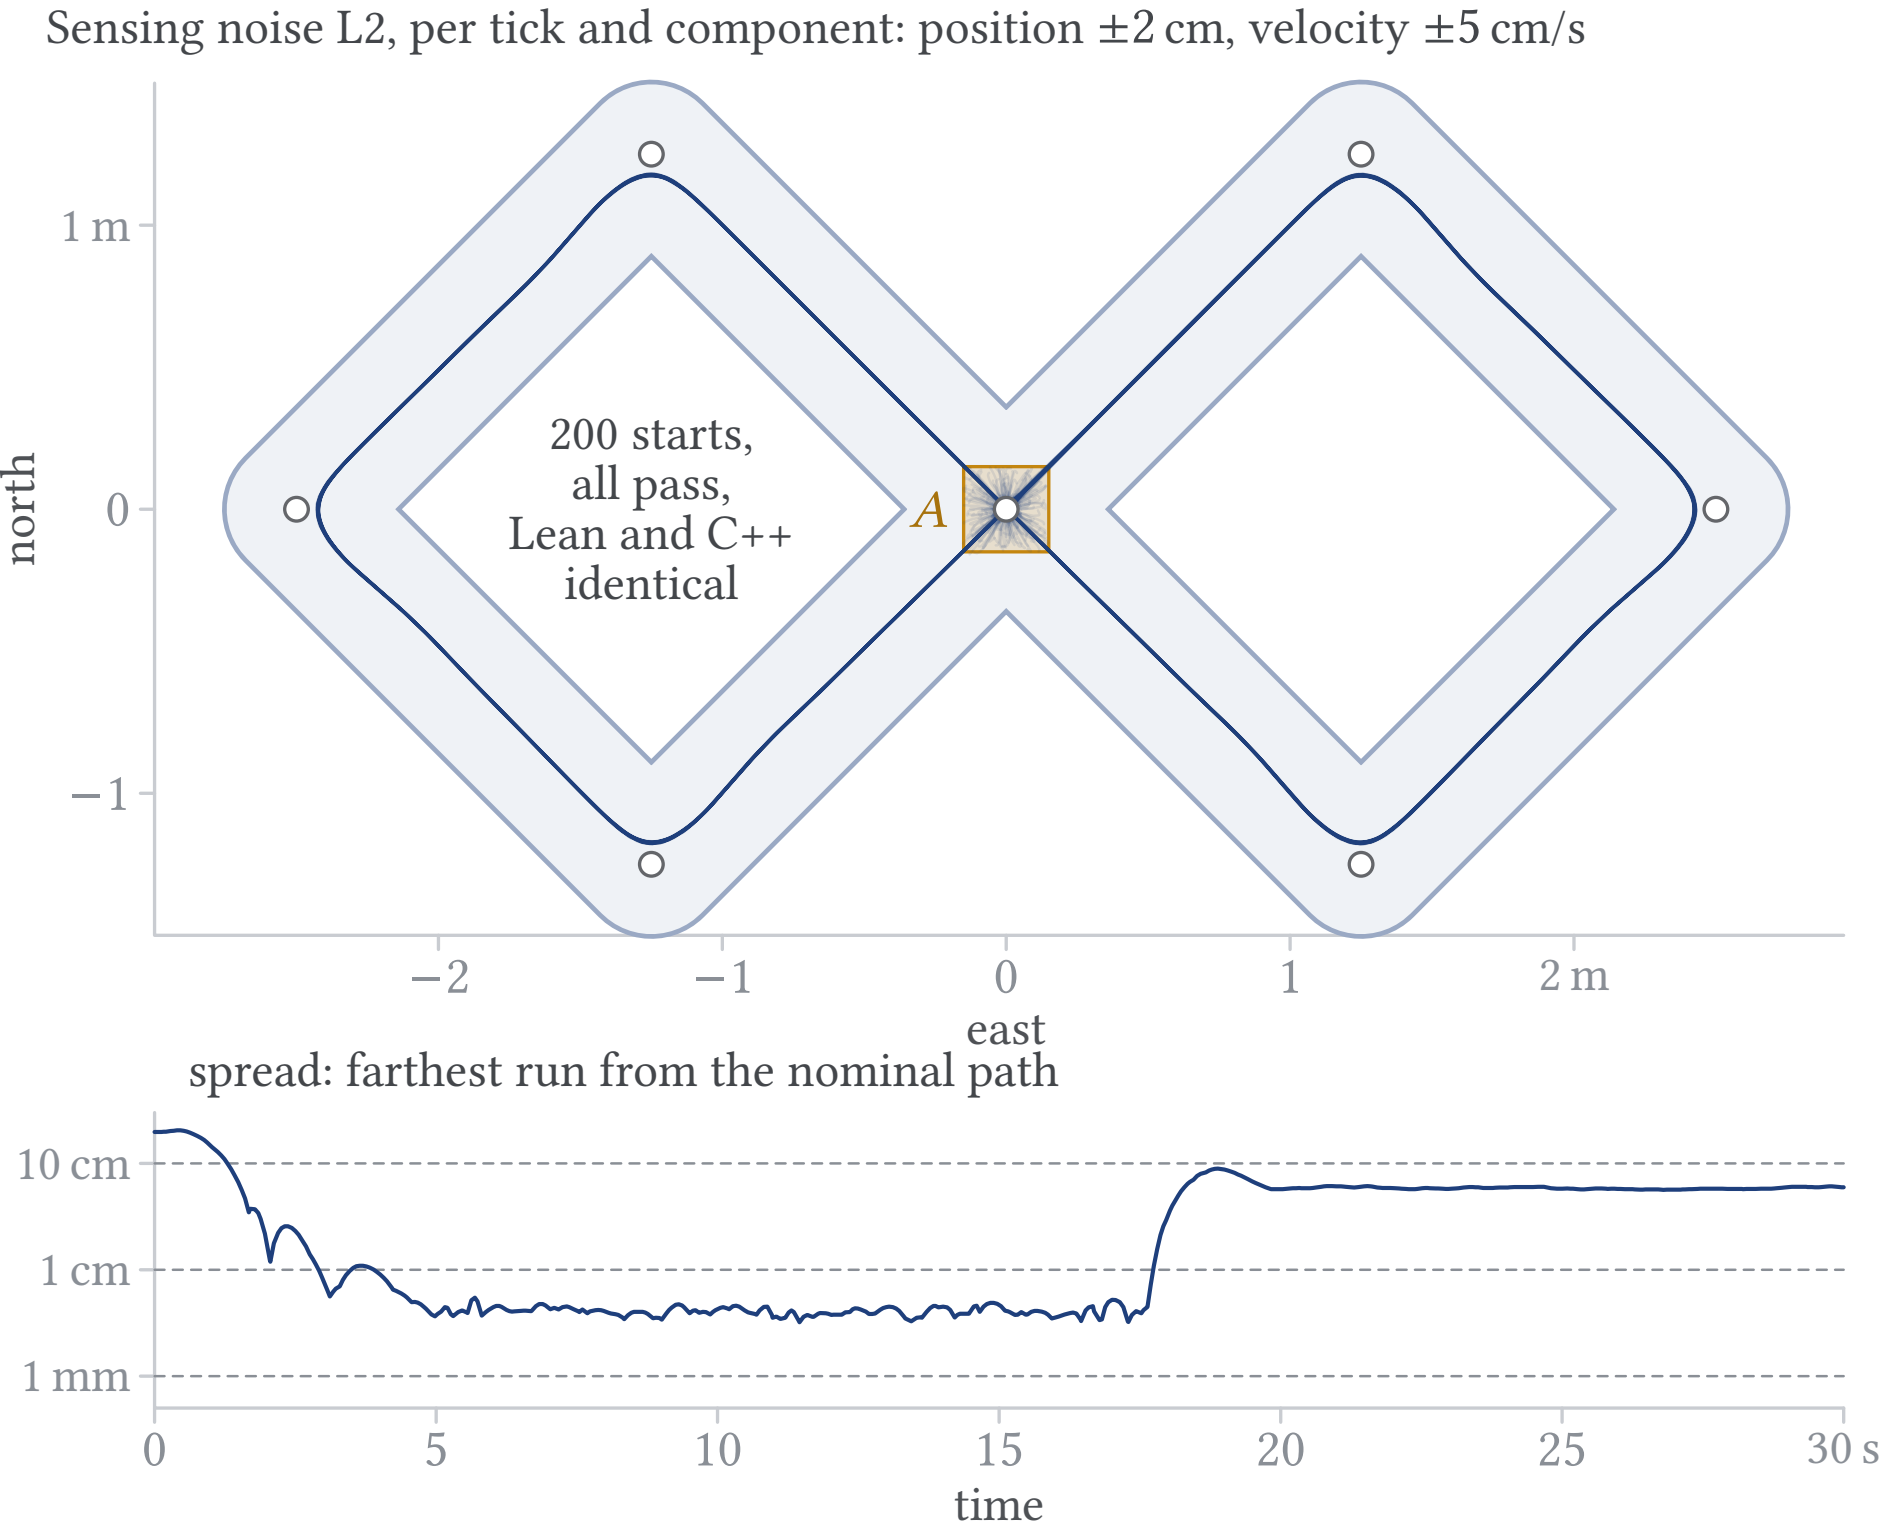

Sensing noise L2, per tick and component: position ±2 cm, velocity ±5 cm/s
1 m
0
−1
north
200 starts,
all pass,
Lean and C++
identical
A
−2
−1
0
1
2 m
east
spread: farthest run from the nominal path
10 cm
1 cm
1 mm
0
5
10
15
20
25
30 s
time