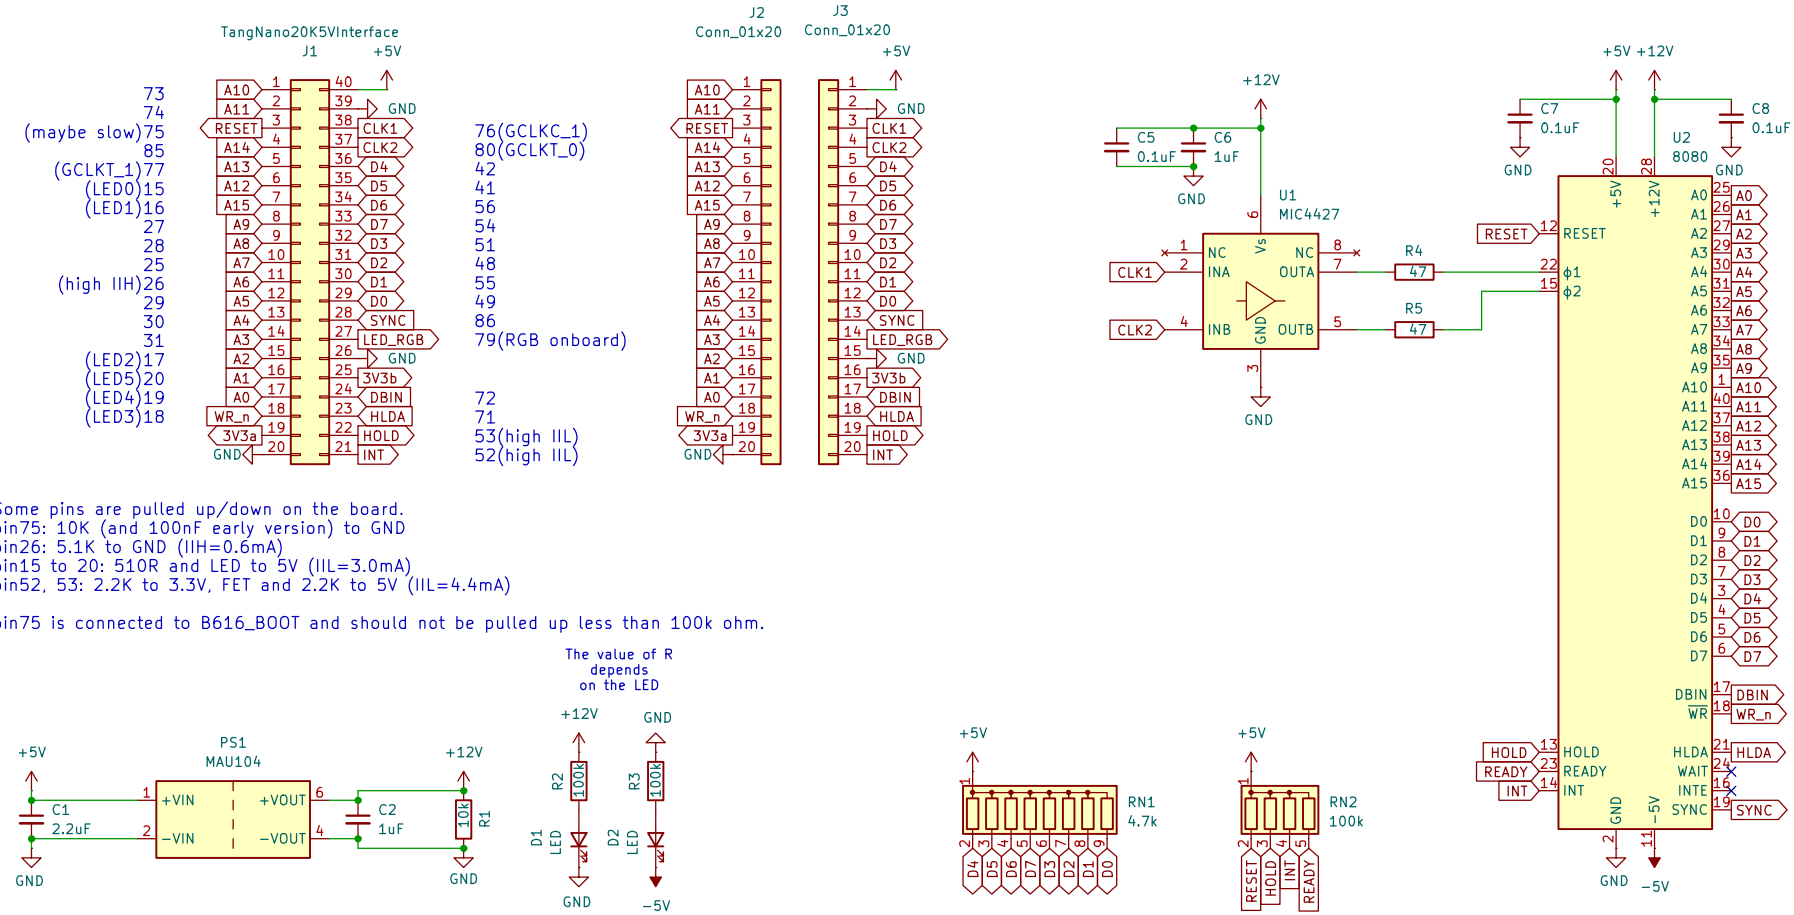

Some pins are pulled up/down on the board.
pin75: 10K (and 100nF early version) to GND
pin26: 5.1K to GND (IIH=0.6mA)
pin15 to 20: 510R and LED to 5V (IIL=3.0mA)
pin52, 53: 2.2K to 3.3V, FET and 2.2K to 5V (IIL=4.4mA)

pin75 is connected to B616_BOOT and should not be pulled up less than 100k ohm.

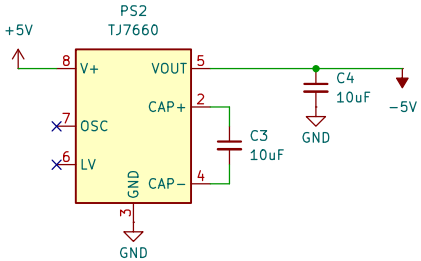

Ryo Mukai

Sheet: /

File: TangNano8080MEM.kicad_sch

Title: Memory System for Intel 8080 using Tang Nano 20K

Size: A4	Date: 2024-08-29	**Rev: 1.1**
KiCad E.D.A. 8.0.4		Id: 1/1