

問題 3

Answer Area

provides reliability when loading an IOS image upon boot up	FTP	uses ports 20 and 21
does not require user authentication		provides reliability when loading an IOS image upon boot up
uses port 69		uses TCP
uses ports 20 and 21	TFTP	uses port 69
uses TCP		does not require user authentication
uses UDP		uses UDP

問題 5

Answer Area

172.28.228.144/18	172.28.228.144/23
172.28.228.144/21	172.28.228.144/21
172.28.228.144/23	172.28.228.144/25
172.28.228.144/25	172.28.228.144/29
172.28.228.144/29	172.28.228.144/18

問題 12


Answer Area

default gateway	NIC vendor OUI
host IP address	NIC MAC address
NIC MAC address	default gateway
NIC vendor OUI	host IP address
subnet mask	subnet mask


問題 38

sends transmissions in sequence	TCP
transmissions include an 8-byte header	sends transmissions in sequence
transmits packets as a stream	uses a lower transmission rate to ensure reliability
transmits packets individually	transmits packets as a stream
uses a higher transmission rate to support latency-sensitive applications	UDP
uses a lower transmission rate to ensure reliability	transmissions include an 8-byte header
	transmits packets individually
	uses a higher transmission rate to support latency-sensitive applications


問題 44

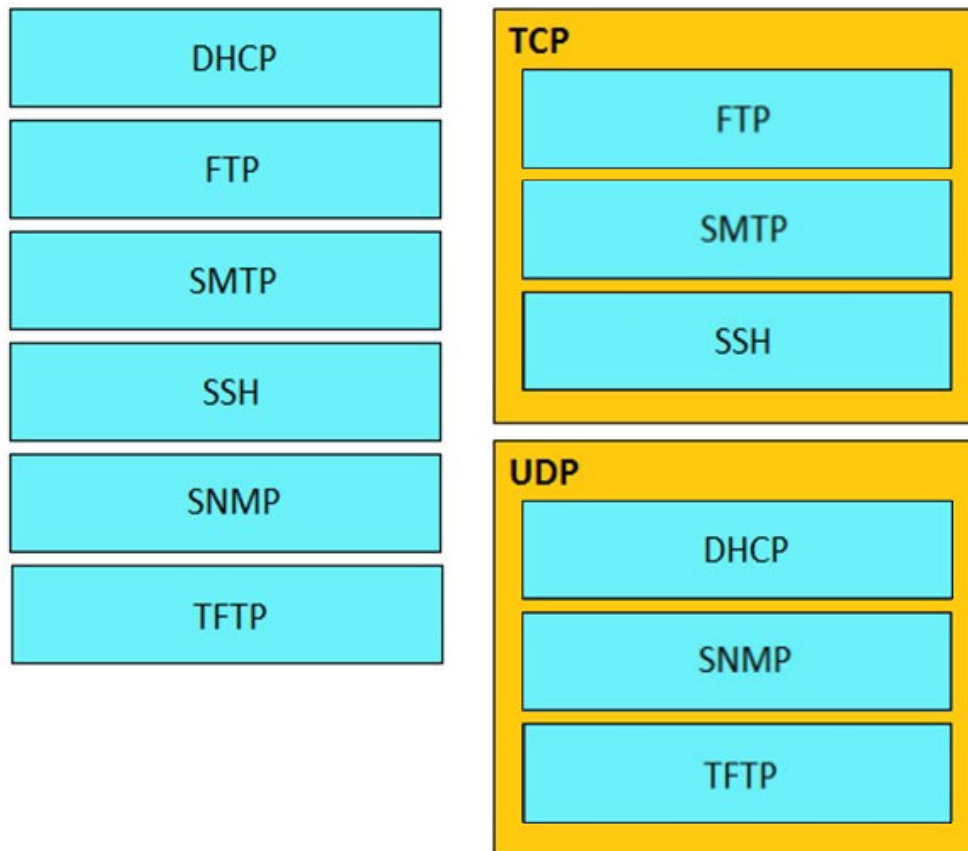


問題 47

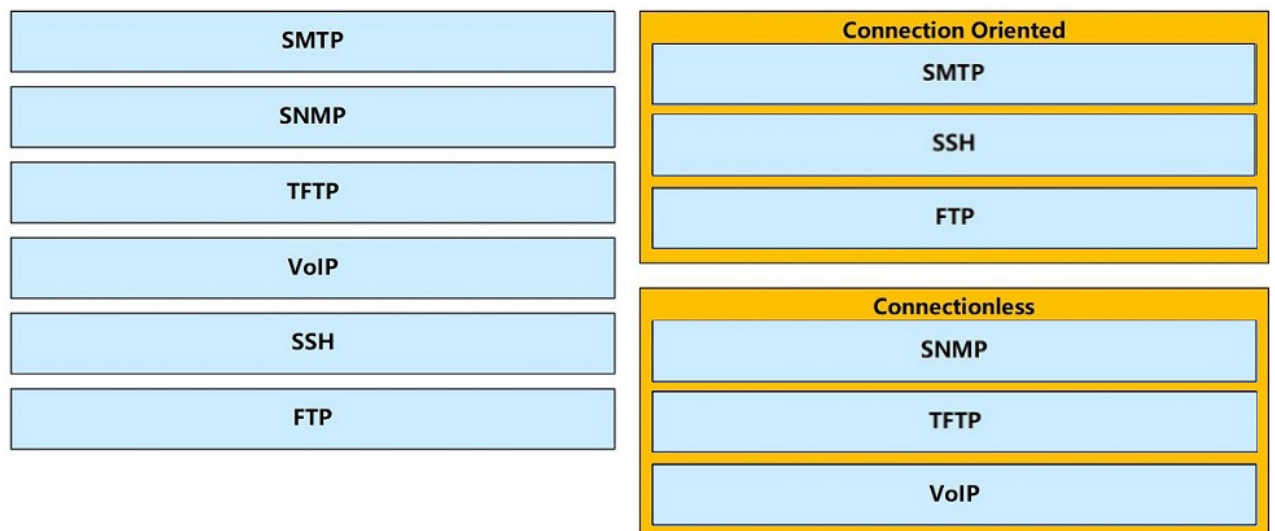

問題 71

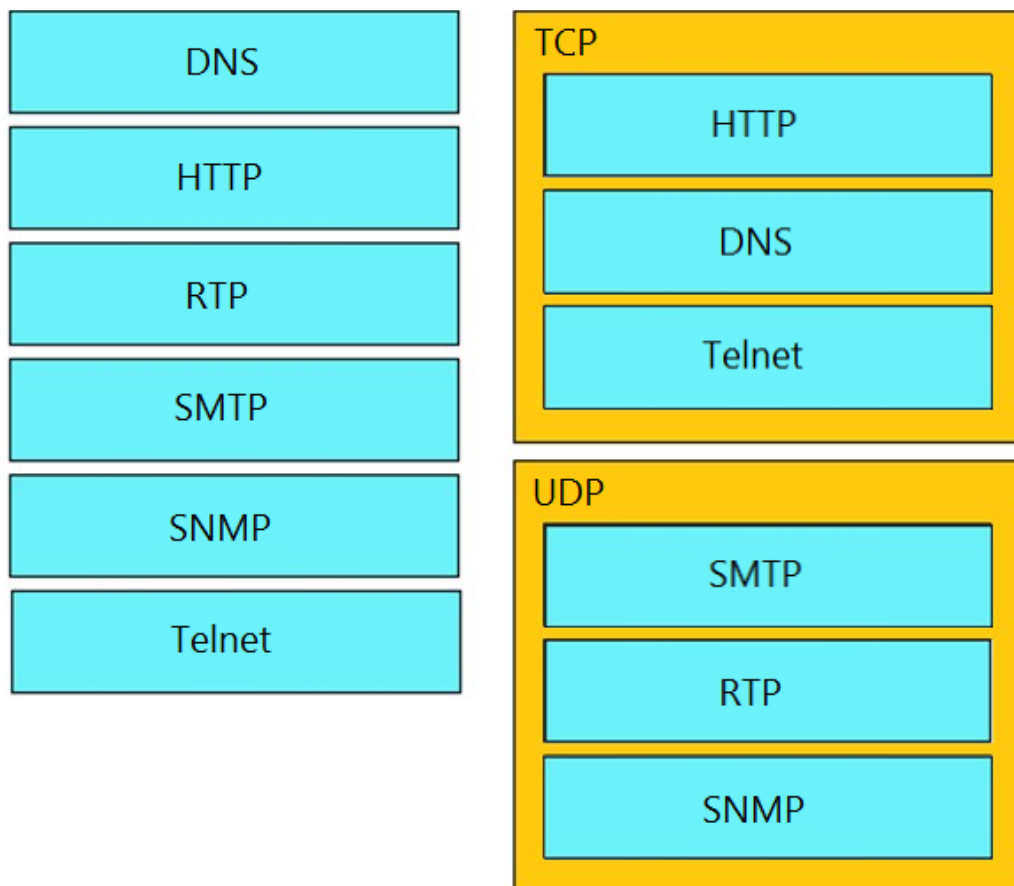


問題 82

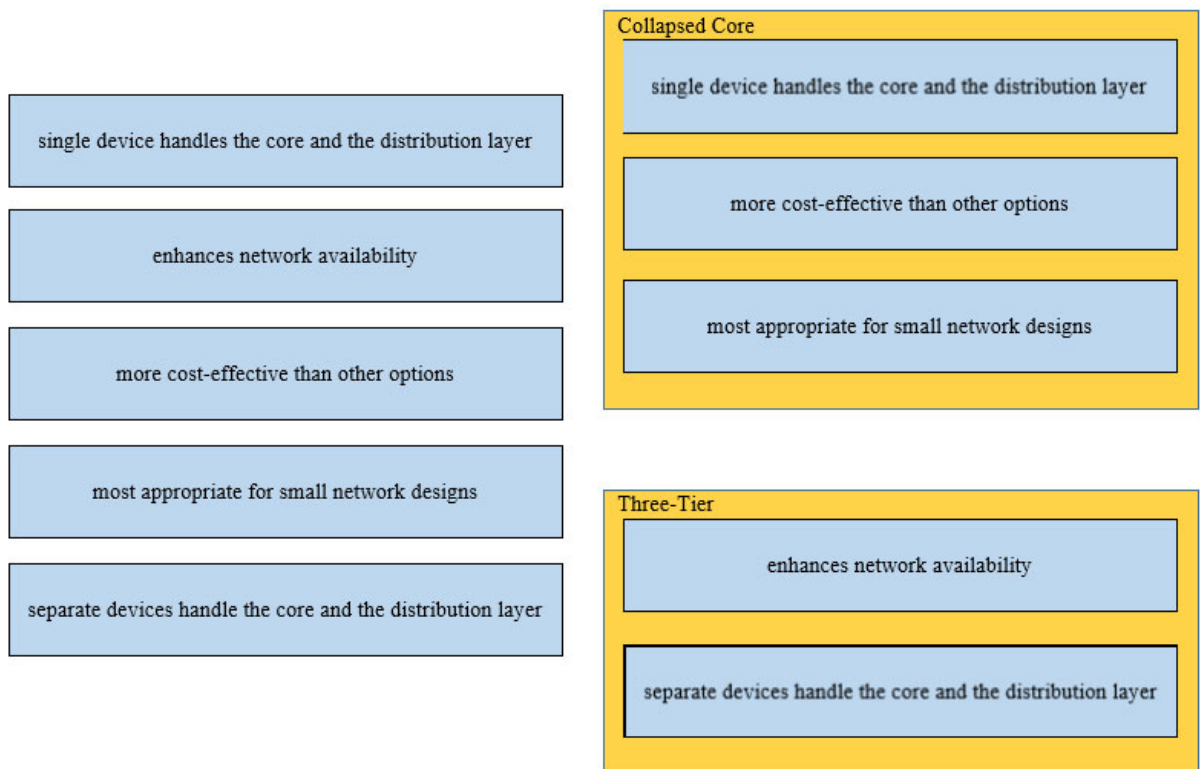

問題 95

Answer Area

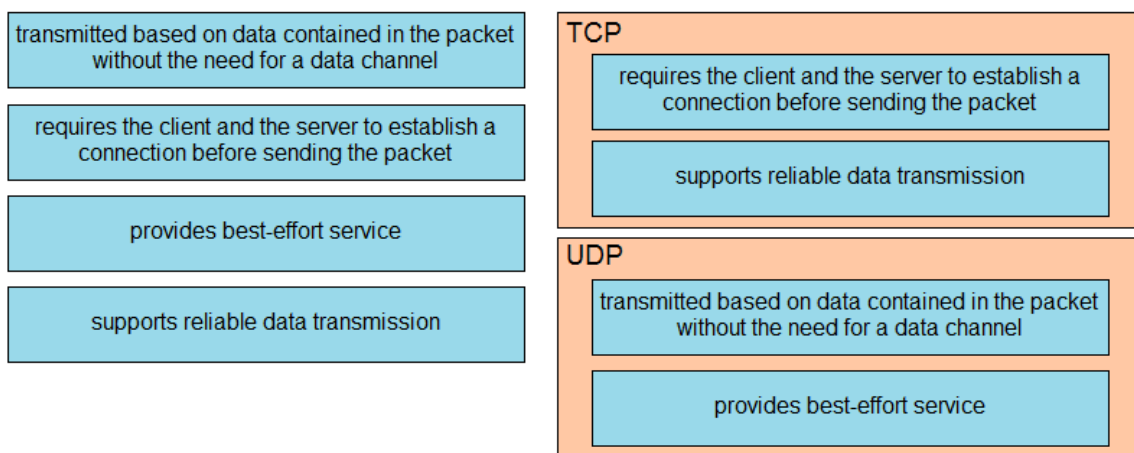

問題 96


Answer Area

2001:db8:600d:cafe::123	Global Unicast
fcba:926a:e8e:7a25:b1:c6d2:1a76:8fdc	2001:db8:600d:cafe::123
fd6d:c83b:5cef:b6b2::1	3ffe:e54d:620:a87a::f00d
3ffe:e54d:620:a87a::f00d	Unique Local
	fcba:926a:e8e:7a25:b1:c6d2:1a76:8fdc
	fd6d:c83b:5cef:b6b2::1


問題 99

fe80::a00:27ff:feeb:89aa	Global Unicast
3ffe:e54d:620:a87a::f00d	3ffe:e54d:620:a87a::f00d
ff05::1:3	2001:db8:600d:cafe::123
2001:db8:600d:cafe::123	Link-Local Unicast
	fe80::a00:27ff:feeb:89aa
	Multicast
	ff05::1:3

問題 118

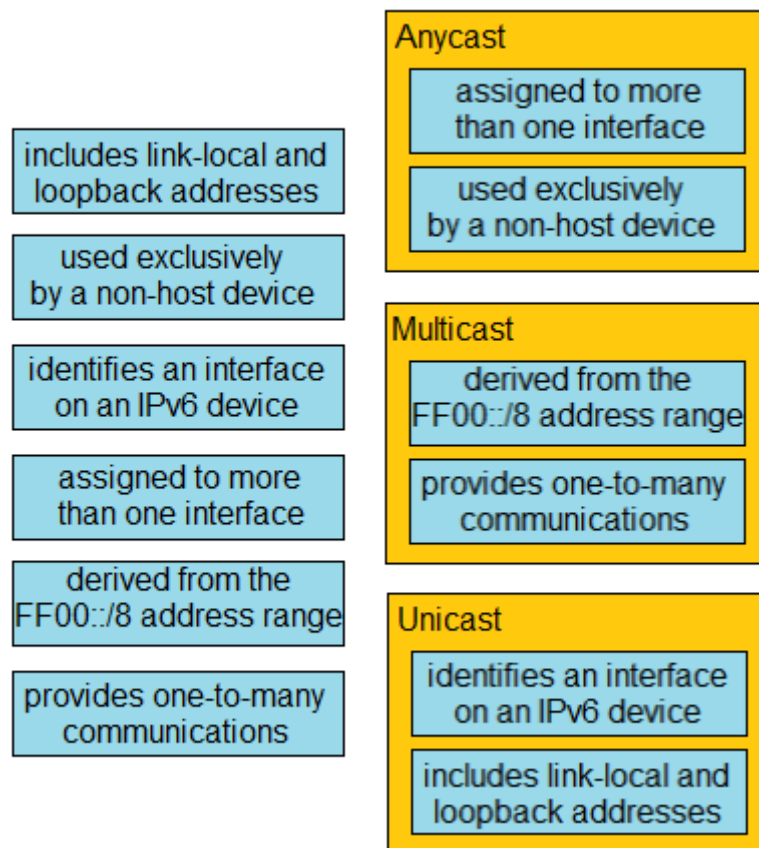

問題 131

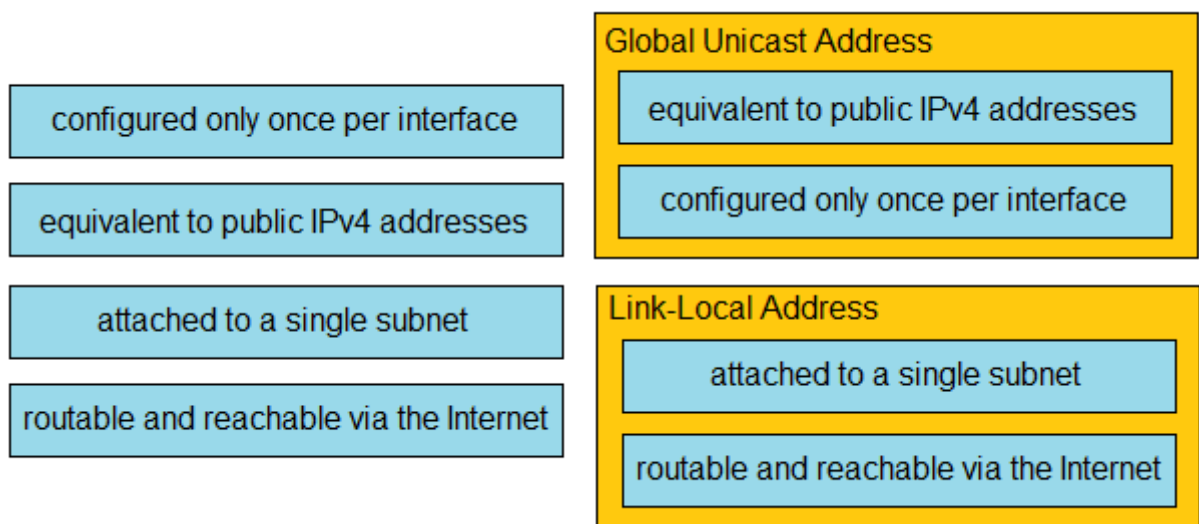

問題 132

ip address 192.168.4.9 255.255.255.248

ip address 192.168.3.14 255.255.255.240

ip address 209.165.202.129 255.255.255.252

ip address 192.168.4.13 255.255.255.240

ip address 209.165.202.130 255.255.255.252

ip address 209.165.202.131 255.255.255.252

ip address 192.168.3.14 255.255.255.248

DC-1

ip address 209.165.202.130 255.255.255.252

ip address 192.168.4.9 255.255.255.248

ip address 192.168.3.14 255.255.255.240

HQ-1

ip address 192.168.3.14 255.255.255.248


問題 134

2001:DB8::bced:1234:456d :aacc	FF05::23:becf:22:1111
FD00:0000:0000:1a2d:a 153:3992:a19d:ccca	FE80::abcd:f:fff:12de:3992
FE80::abcd:f:fff:12de:3992	FD00:0000:0000:1a2d:a 153:3992:a19d:ccca
FF05::23:becf:22:1111	2001:DB8::bced:1234:456d :aacc


問題 136

IPv6 addresses in the format FF02::5	Unique Local Addresses
IPv6 addresses that begin with FD	
may be used by multiple organizations at the same time	
private IPv6 addresses	Link-Local Addresses
serve as next-hop addresses	
unable to serve as destination addresses	


問題 137

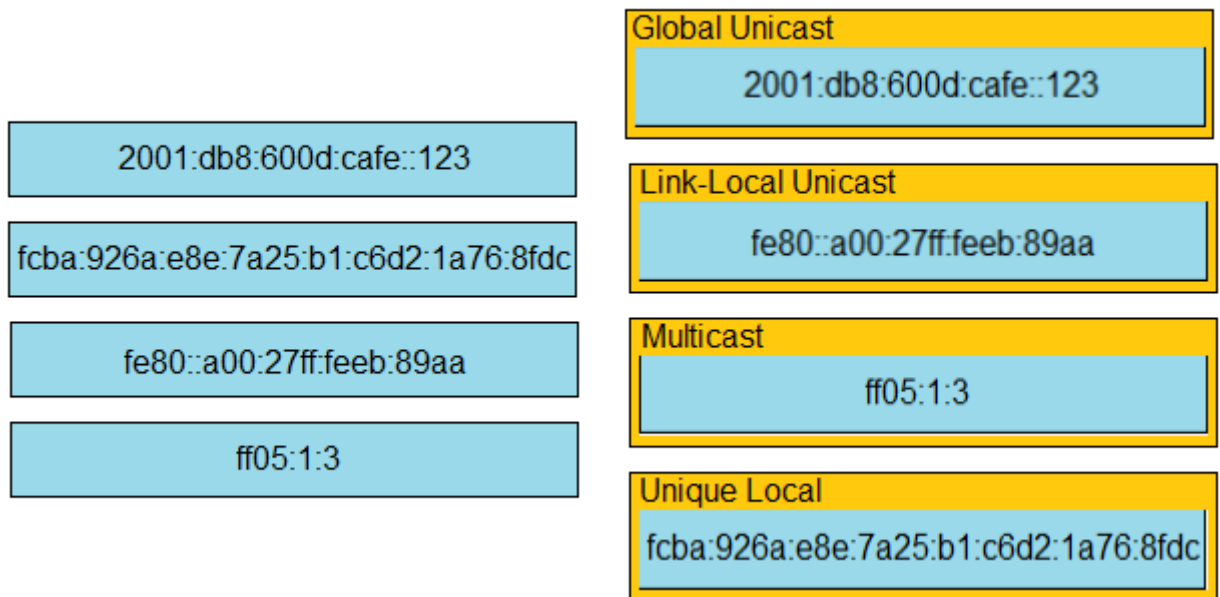

問題 139

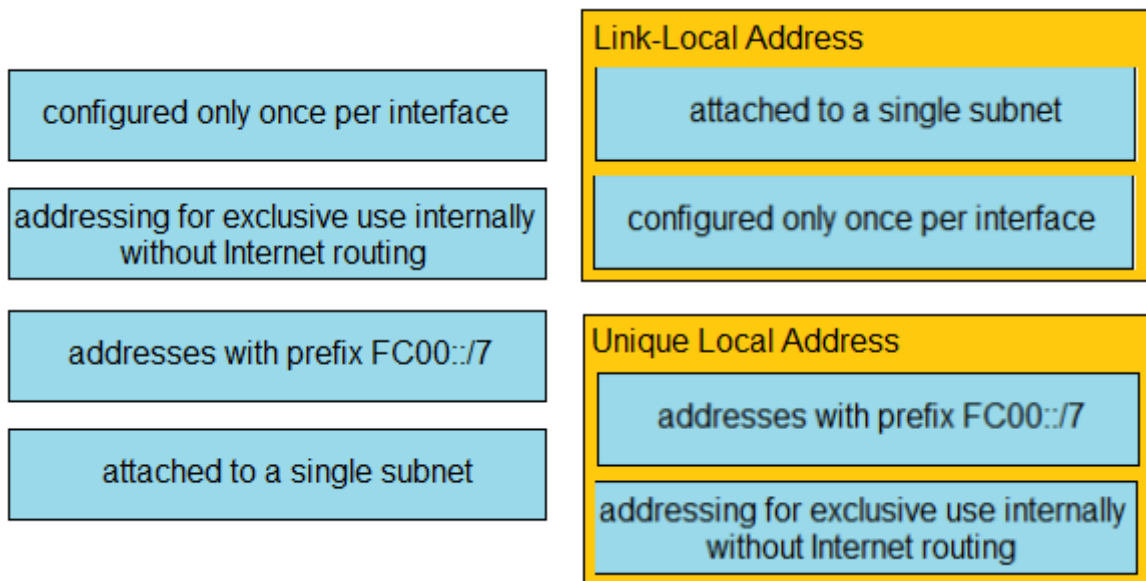


問題 141

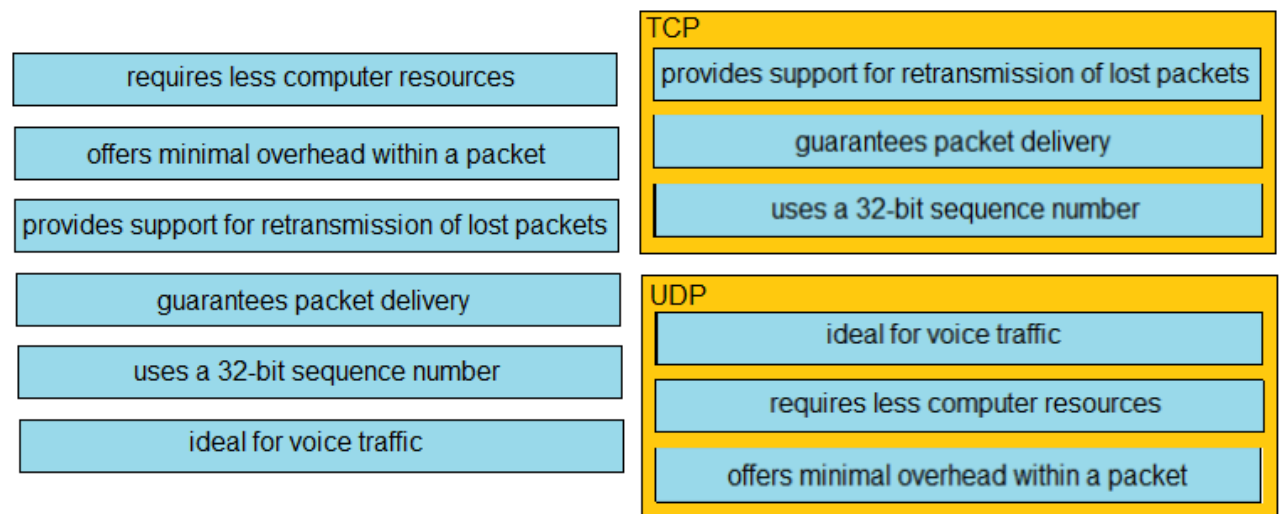

問題 146

Answer Area

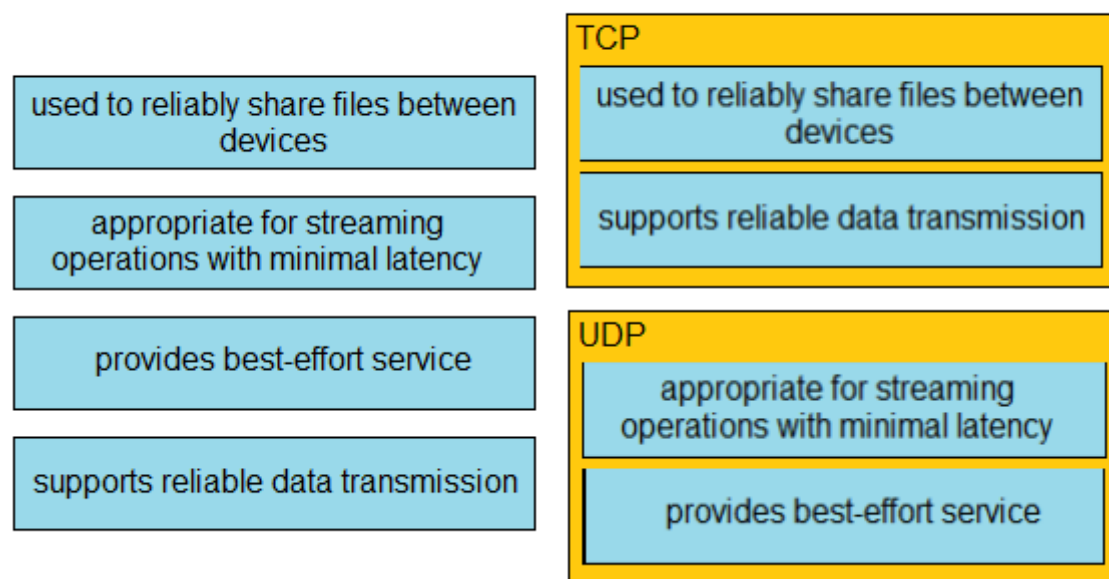

問題 148

AAAA	CNAME
CNAME	SOA
NS	NS
PTR	AAAA
SOA	PTR

問題 150

	Global Unicast 3ffe:e54d:620:a87a::f00d
3ffe:e54d:620:a87a::f00d	Link-Local Unicast fe80::a00:27ff:feeb:89aa
fe80::a00:27ff:feeb:89aa	Multicast ff05::1:3
ff05::1:3	Unique Local fd6d:c83b:5cef:b6b2::1
fd6d:c83b:5cef:b6b2::1	


問題 153

192.168.1.1	192.168.1.255
192.168.1.20	192.168.1.1
192.168.1.254	192.168.1.20
192.168.1.255	192.168.1.254
B8-76-3F-7C-57-DF	B8-76-3F-7C-57-DF

問題 154



問題 155

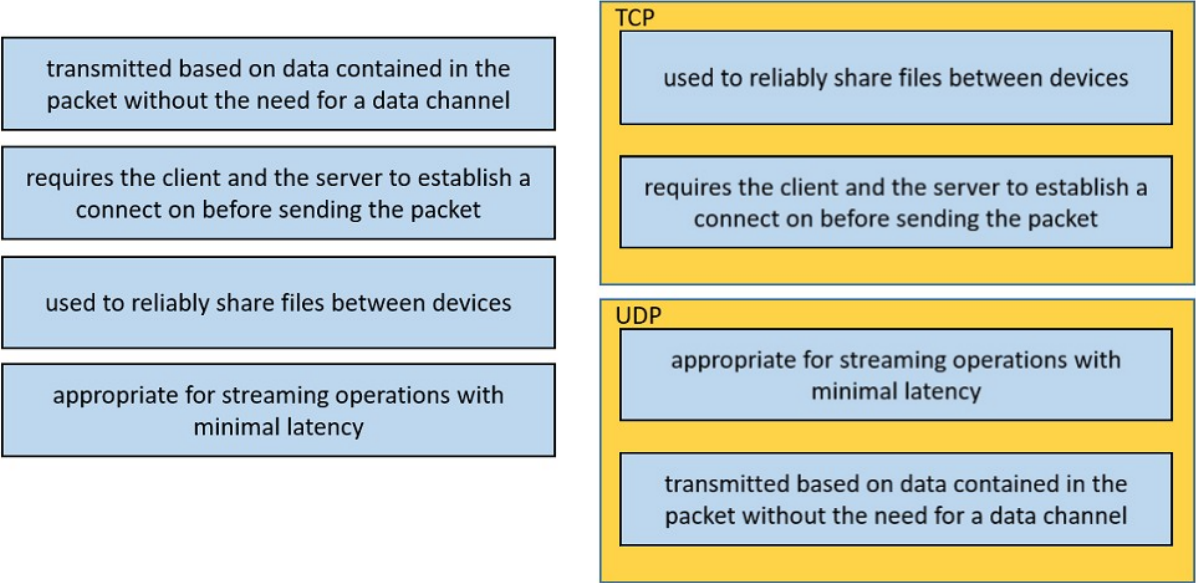

問題 175

It encapsulates LWAPP traffic between the access point and the WLC in EtherType 0xB BBBB.

It facilitates Layer 2 connectivity between the WLC's wired interface and the WLAN clients.

It forwards only IP EtherType frames.

It requires IP addresses on the access point and the WLC.

It supports LWAPP tunneling within Ethernet frames and UDP packets.

It uses UDP or UDP Lite for IPv6 deployments.

Layer 2 Tunnel

It encapsulates LWAPP traffic between the access point and the WLC in EtherType 0xB BBBB.

It requires IP addresses on the access point and the WLC.

Layer 3 Tunnel

It supports LWAPP tunneling within Ethernet frames and UDP packets.

It uses UDP or UDP Lite for IPv6 deployments.

問題 176

distribution system

distribution system

extended service set

independent basic service set

independent basic service set

infrastructure mode

infrastructure mode

SSID

SSID

extended service set

問題 182

192.168.1.1	192.168.1.255
192.168.1.20	192.168.1.1
192.168.1.254	192.168.1.20
192.168.1.255	192.168.1.254
B8-76-3F-7C-57-DF	B8-76-3F-7C-57-DF
1A-76-3F-7C-57-DF	192.168.1.0
192.168.1.0	

問題 187


Answer Area

access point	wireless LAN controller
virtual interface	access point
dynamic interface	service port
service port	virtual interface
wireless LAN controller	dynamic interface


問題 207

Dynamic RF Feature	Easy Deployment Process
Easy Deployment Process	Dynamic RF Feature
Optimized user performance	Easy upgrade process
Easy upgrade process	Optimized user performance

問題 258

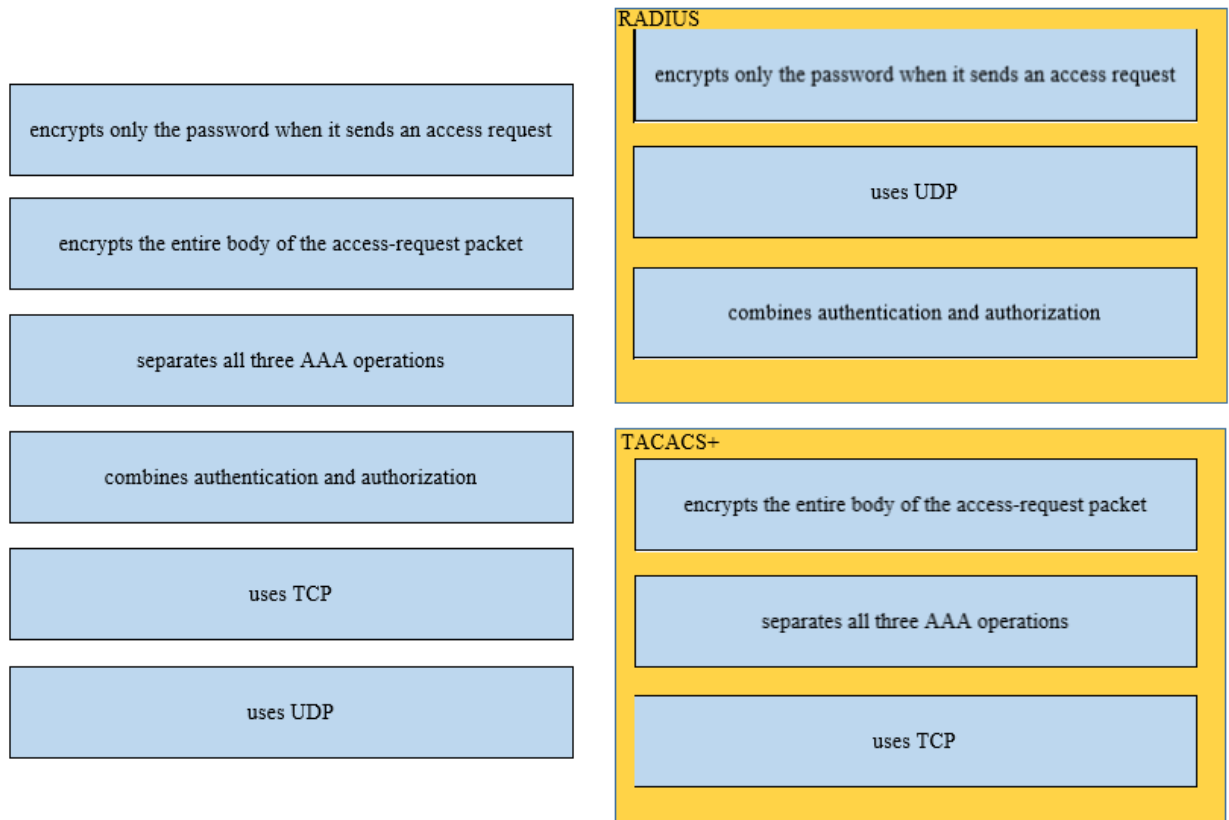


問題 261

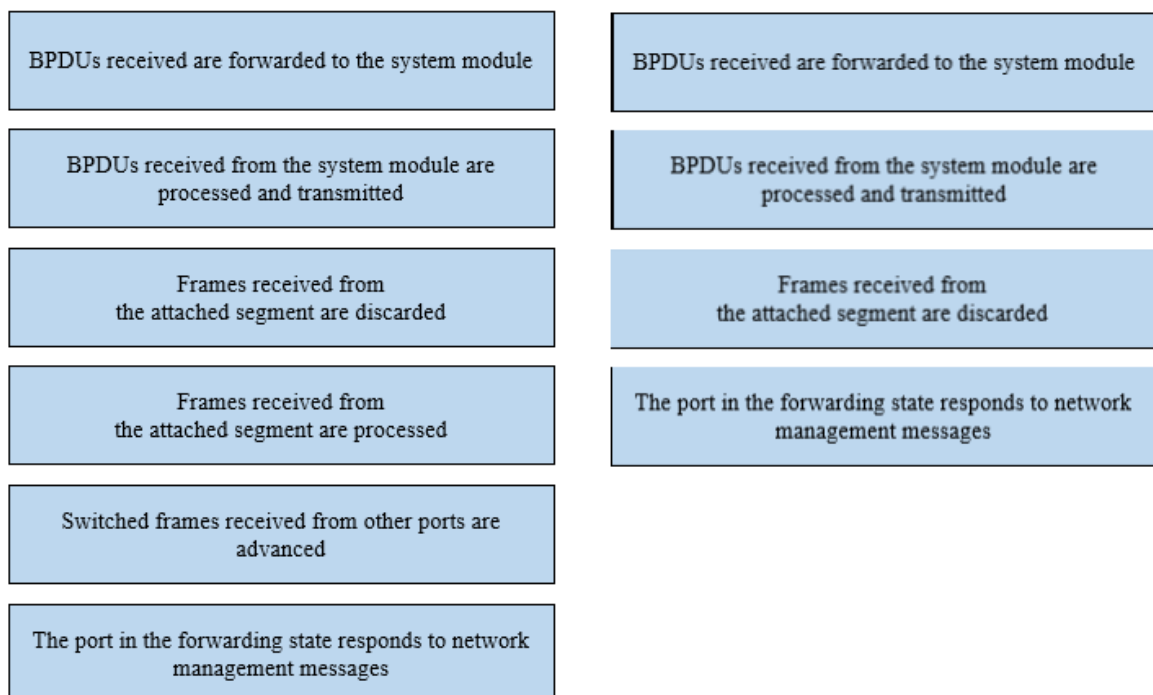


問題 272

Answer Area

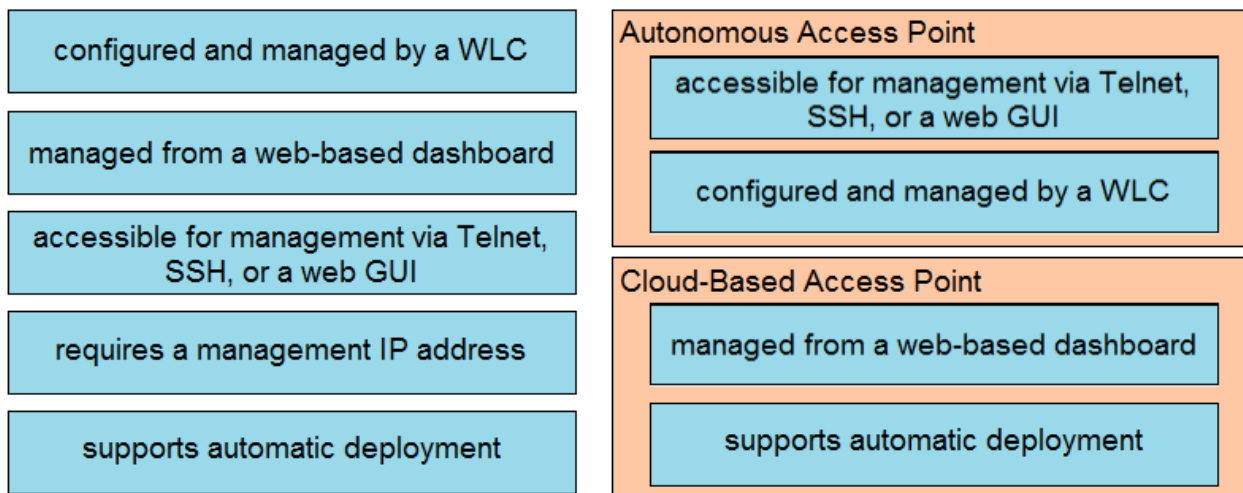

問題 278

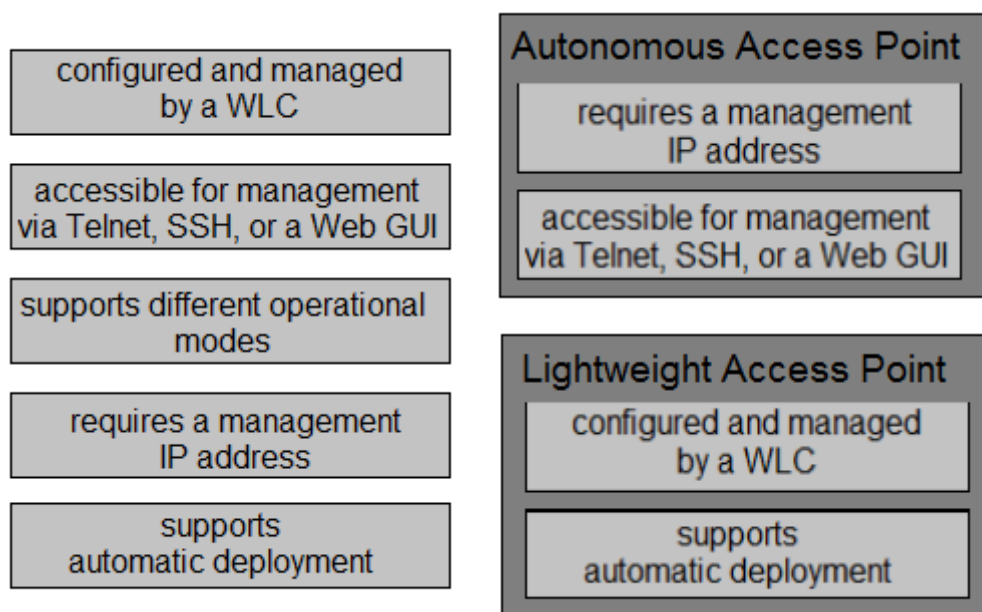

問題 284

configure the BPDU guard feature	configure a VLAN access control list
configure the dynamic ARP inspection feature	configure the dynamic ARP inspection feature
configure the root guard feature	configure the root guard feature
configure a VLAN access control list	configure the BPDU guard feature

問題 290

console	Telnet
HTTPS	SSH
SSH	console
Telnet	HTTPS

問題 330

configured and managed by a WLC	Cloud-Based Access Point
managed from a Web-based dashboard	managed from a Web-based dashboard
accessible for management via Telnet, SSH, or a Web GUI	supports automatic deployment
supports different operational modes	Lightweight Access Point
supports automatic deployment	configured and managed by a WLC
	supports different operational modes

問題 336

- It supports real-time Wi-Fi client troubleshooting when network engineers are offsite.
- It captures and forwards packets on a specific wireless channel.
- It enables enhanced RFID-tag location tracking.
- It provides air-quality data and interference detection across all enabled channels.
- It supports analytics for wireless performance testing.
- It supports software that analyzes wireless frames on a remote device.

Monitor

It supports software that analyzes wireless frames on a remote device.

It enables enhanced RFID-tag location tracking.

Sensor

It supports analytics for wireless performance testing.

It captures and forwards packets on a specific wireless channel.

Sniffer

It supports real-time Wi-Fi client troubleshooting when network engineers are offsite.

It provides air-quality data and interference detection across all enabled channels.

問題 383

connected
EBGP
EIGRP
OSPF
RIP
static

connected
static
EBGP
EIGRP
OSPF
RIP

問題 416

Answer Area

area ID
IP address
netmask
OSPF process ID
router ID
timers


must match
area ID
netmask
timers
must be unique
IP address
router ID

問題 480

255.255.255.128	255.255.255.252
255.255.255.224	255.255.255.248
255.255.255.240	255.255.255.224
255.255.255.248	255.255.255.128
255.255.255.252	

問題 523

Answer Area

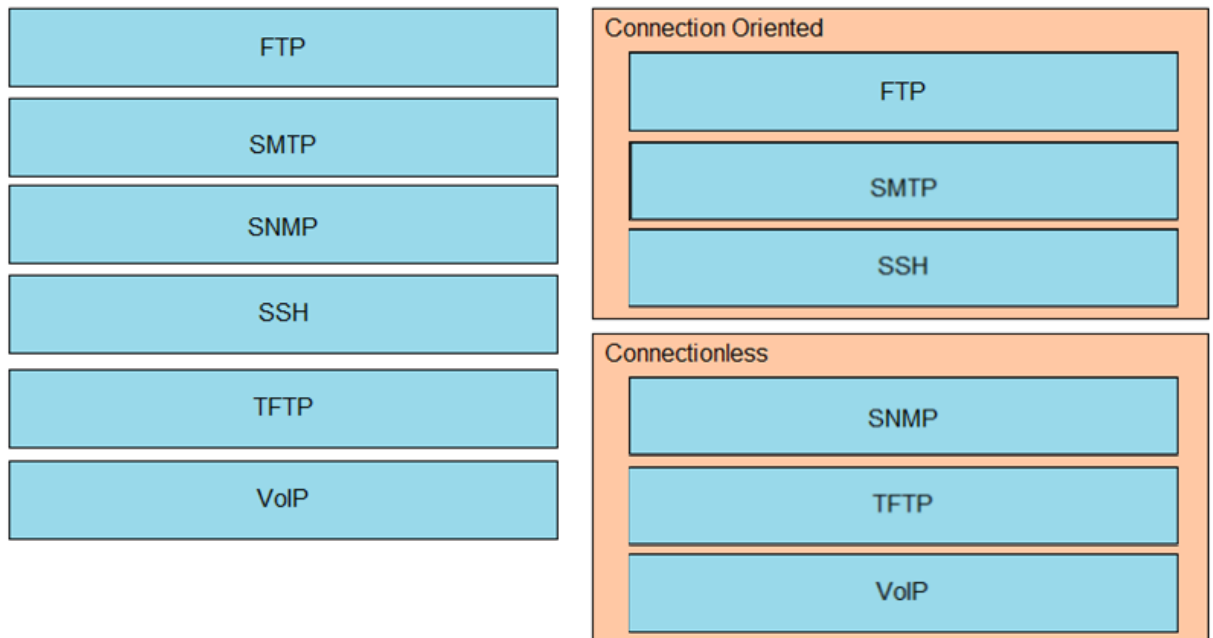

問題 534

Answer Area

resolves web URLs to IP addresses
assigns a default gateway to a client
holds the TCP/IP settings to be distributed to the clients
stores a list of IP addresses mapped to names
assigns IP addresses to enabled clients

DHCP Server
assigns a default gateway to a client
holds the TCP/IP settings to be distributed to the clients
assigns IP addresses to enabled clients
DNS Server
resolves web URLs to IP addresses
stores a list of IP addresses mapped to names

問題 545

Answer Area

MIB
SNMP agent
SNMP manager
SNMP trap

MIB
SNMP trap
SNMP agent
SNMP manager

問題 552

ip address 172.16.1.1 255.255.255.0	ip address 172.16.1.1 255.255.255.0
ip address 45.83.2.214 255.255.255.240	ip nat inside
ip nat inside	ip address 45.83.2.214 255.255.255.240
ip nat inside source list 1 interface s0 overload	ip nat outside
ip nat inside source static tcp 172.16.1.2 80 45.83.2.214 80 extendable	ip nat inside source static tcp 172.16.1.2 80 45.83.2.214 80 extendable
ip nat outside	ip nat inside source list 1 interface s0 overload

問題 583

show snmp chassis	show snmp host
show snmp community	show snmp engineID
show snmp engineID	show snmp group
show snmp group	show snmp community
show snmp host	show snmp chassis

問題 586

cloud-based weighted fair queueing	classification
classification	policing
congestion	shaping
policing	congestion
shaping	cloud-based weighted fair queueing

問題 588


event correlation and aggregation	problem resolution
fault detection	restoration of service
fault diagnosis and isolation	event correlation and aggregation
problem resolution	fault detection
restoration of service	fault diagnosis and isolation

問題 592

provides local control for network segments using a client-server scheme	maintains an address pool
uses authoritative servers for record keeping	provides local control for network segments using a client-server scheme
maintains an address pool	reduces the administrative burden for onboarding end users
associates hostnames to IP address	assigns IP addresses to local hosts for a configurable lease time
offers domain name server configuration	
reduces the administrative burden for onboarding end users	
assigns IP addresses to local hosts for a configurable lease time	


問題 614

Answer Area

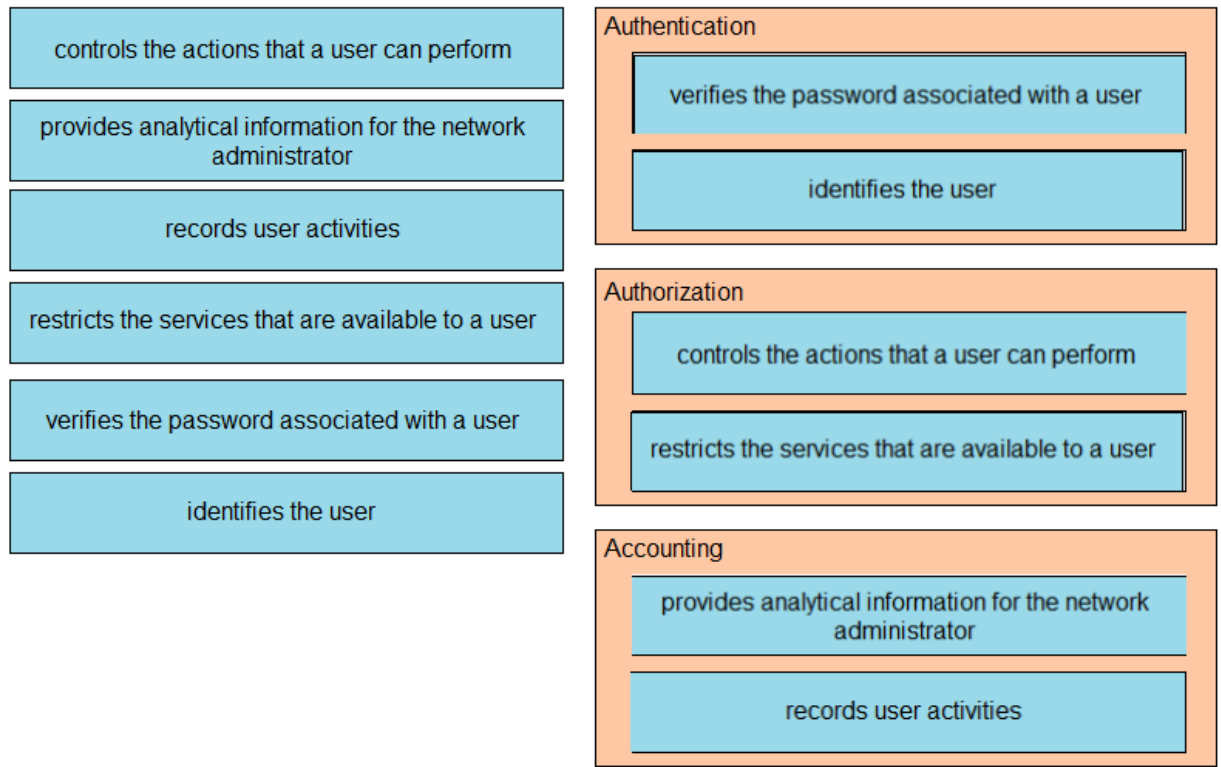

問題 617

Answer Area

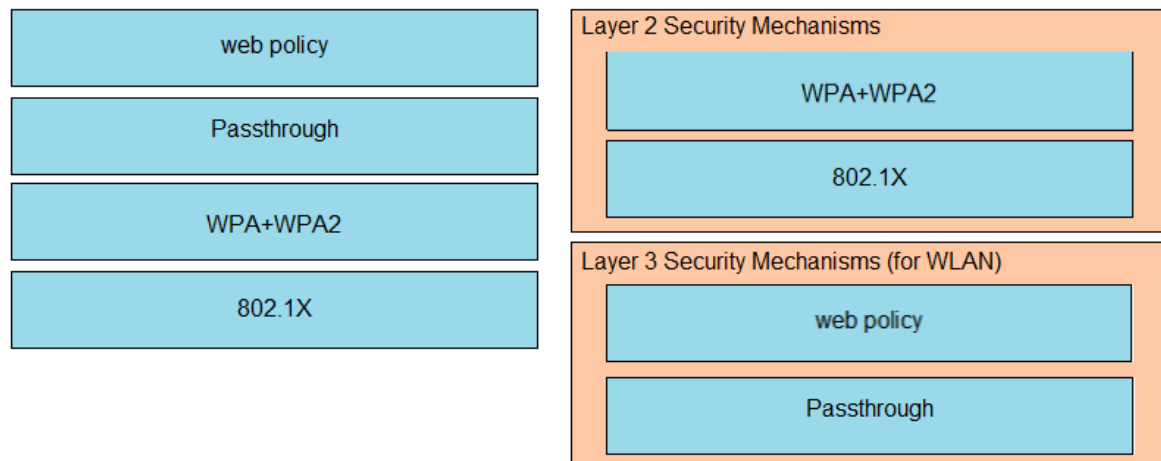

問題 623

Answer Area

configure 802.1x authenticate	configure the native VLAN with a nondefault VLAN ID
configure DHCP snooping	configure DHCP snooping
configure the native VLAN with a nondefault VLAN ID	configure 802.1x authenticate
disable DTP	disable DTP

問題 633

Answer Area

Configure BPDU guard.	Configure VACL.
Configure dynamic ARP inspection.	Configure dynamic ARP inspection.
Configure root guard.	Configure root guard.
Configure VACL.	Configure BPDU guard.

問題 651

configure terminal	enable
enable	configure terminal
enable secret \$hfl@4fs	enable secret \$hfl@4fs
exit	exit
line vty 0 4	
service password-encryption	

問題 665

Answer Area

switchport mode access	switchport port-security
switchport port-security	switchport port-security mac-address sticky
switchport port-security mac-address 0060.3EDD.77AB	switchport port-security maximum 2
switchport port-security mac-address 00D0.D3ED.622A	switchport port-security violation shutdown
switchport port-security mac-address sticky	
switchport port-security maximum 2	
switchport port-security violation shutdown	

問題 667

Answer Area

It enables the device to allow user- or group-based access.

It leverages a RADIUS server to grant user access to a reverse Telnet session.

It records the amount of time for which a user accesses the network on a remote server.

It restricts the CLI commands that a user can perform.

It uses TACACS+ to log the configuration commands entered by a network administrator.

It verifies the user and password before granting access to the device.

Accounting


It records the amount of time for which a user accesses the network on a remote server.

It uses TACACS+ to log the configuration commands entered by a network administrator.


Authorization

It leverages a RADIUS server to grant user access to a reverse Telnet session.

It restricts the CLI commands that a user can perform.

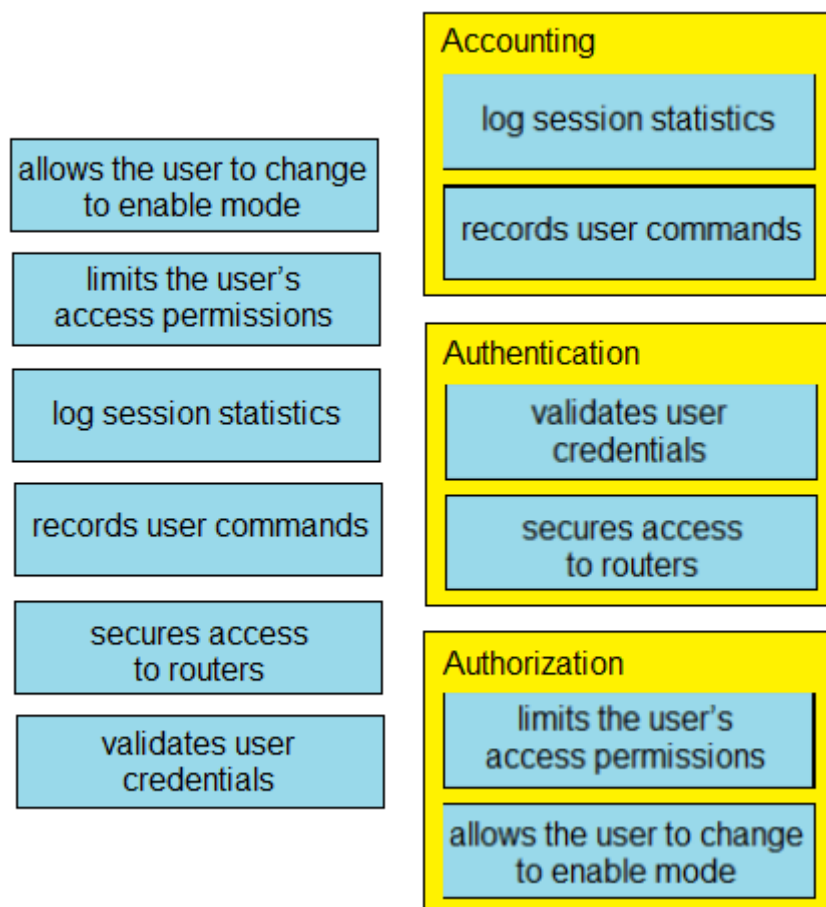

問題 688

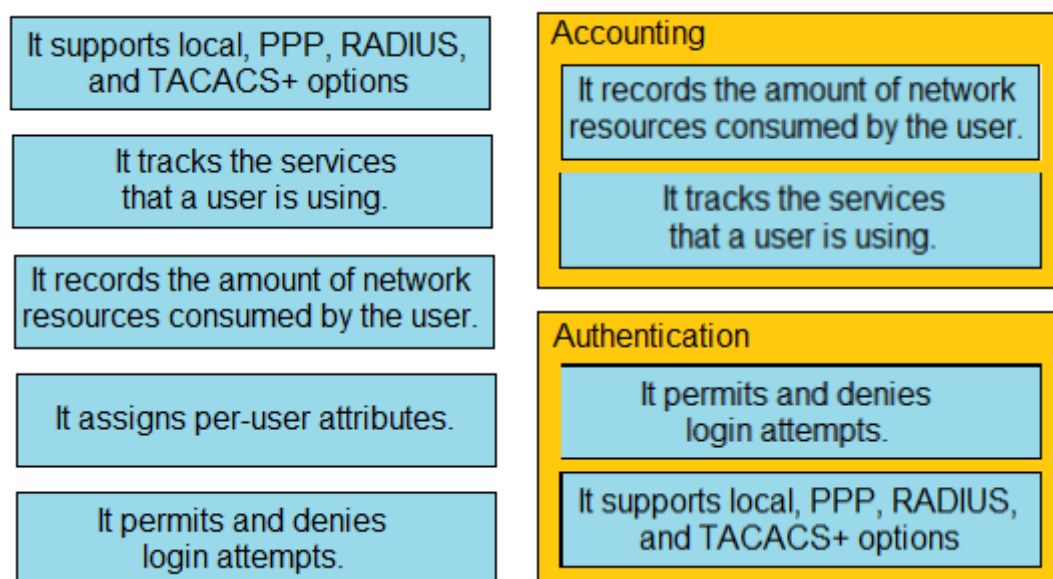

問題 689


awareness	security policy
education	security standard
security policy	awareness
security standard	education
training	training

問題 701

DHCP snooping	IP Source Guard
Dynamic ARP Inspection	DHCP snooping
IP Source Guard	storm control
storm control	Dynamic ARP Inspection


問題 715

Answer Area



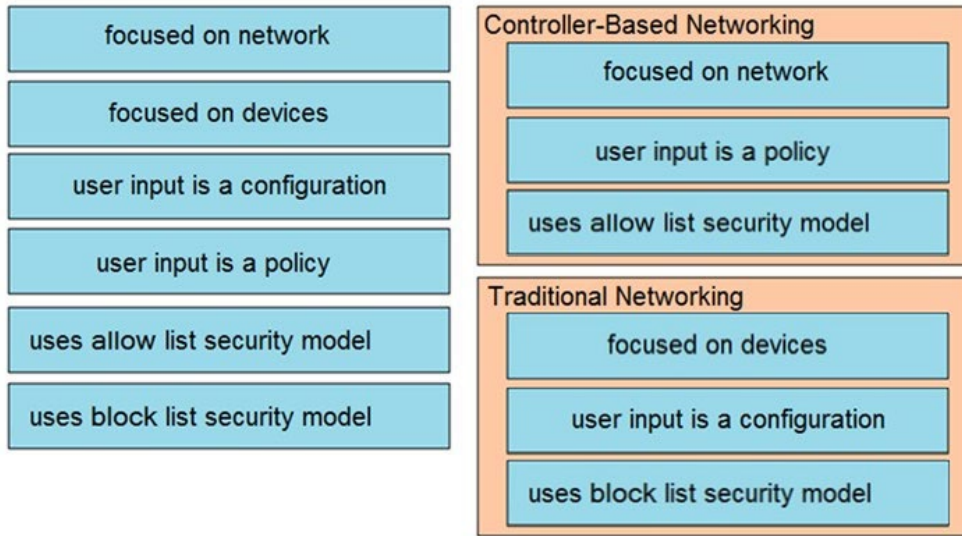


問題 723



Answer Area

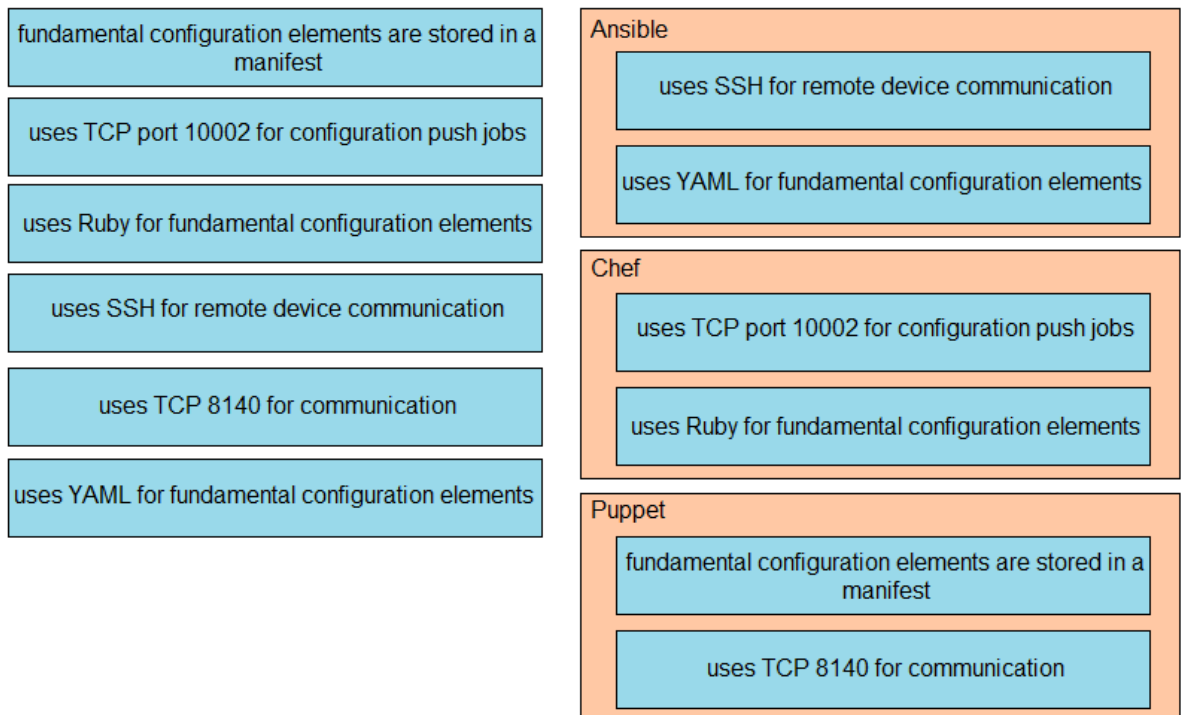


問題 725

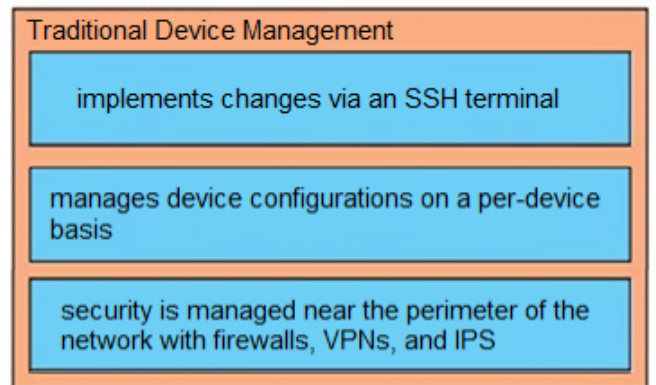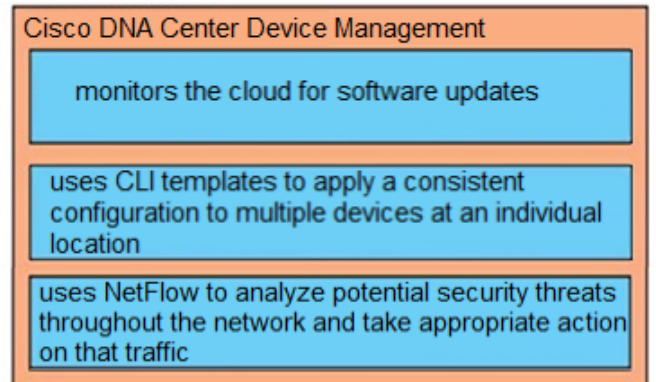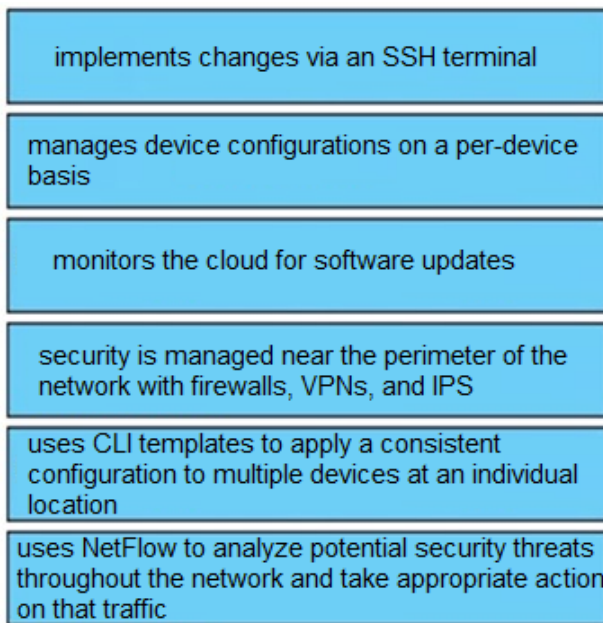

問題 729

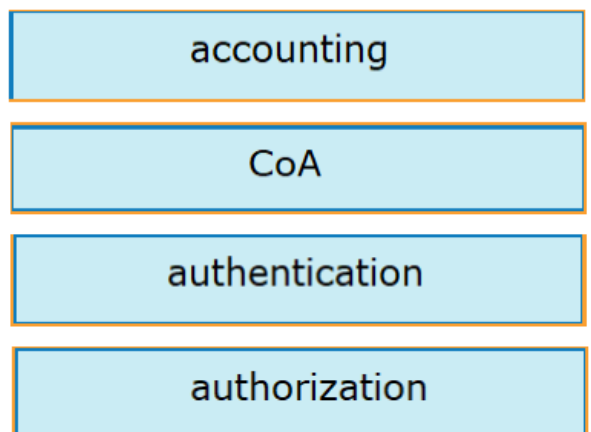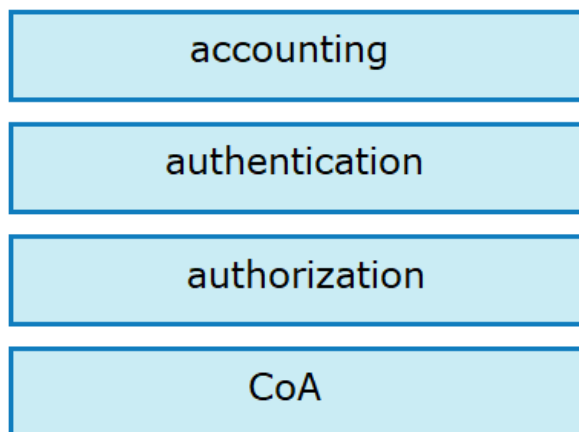


問題 732

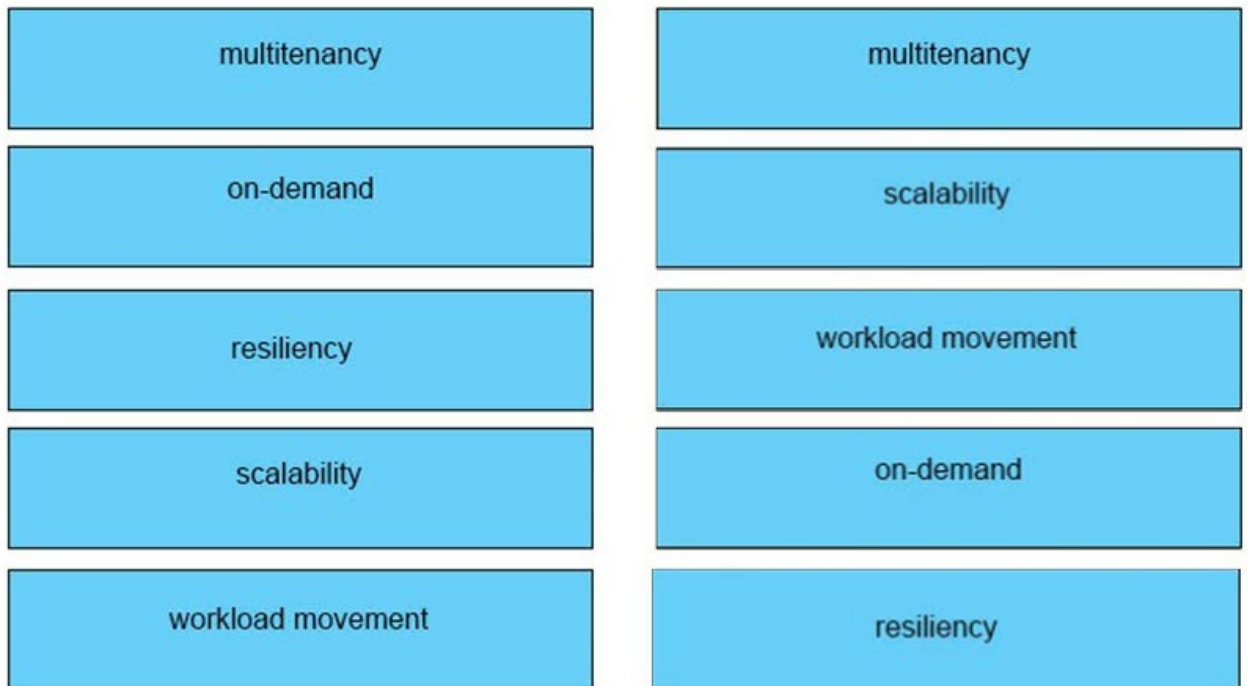


問題 753

Answer Area

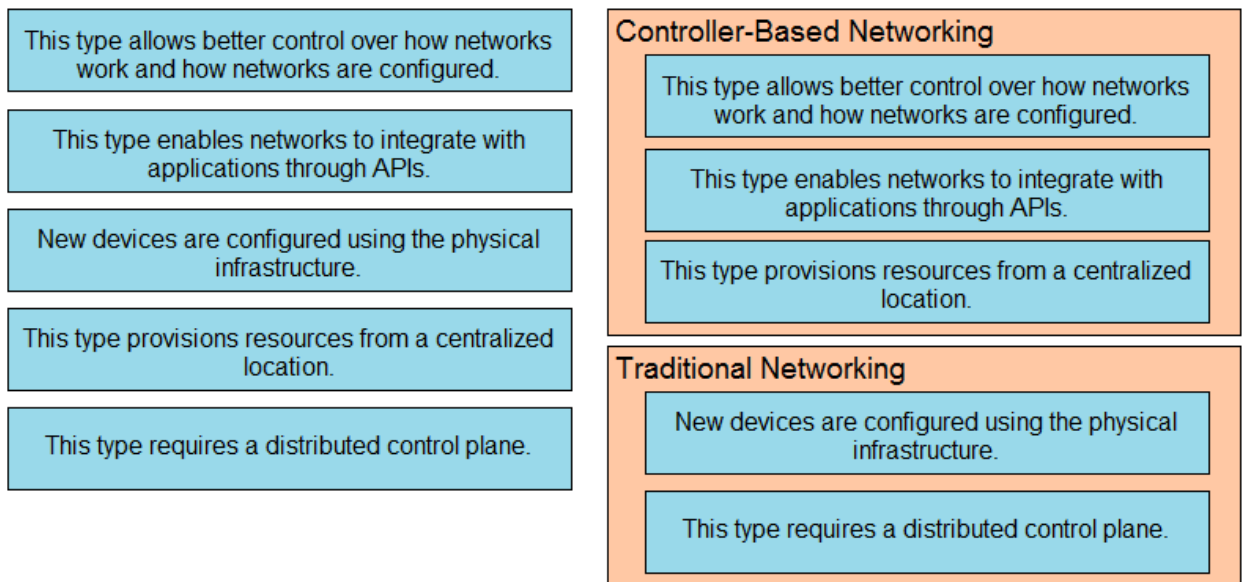


問題 757


Answer Area

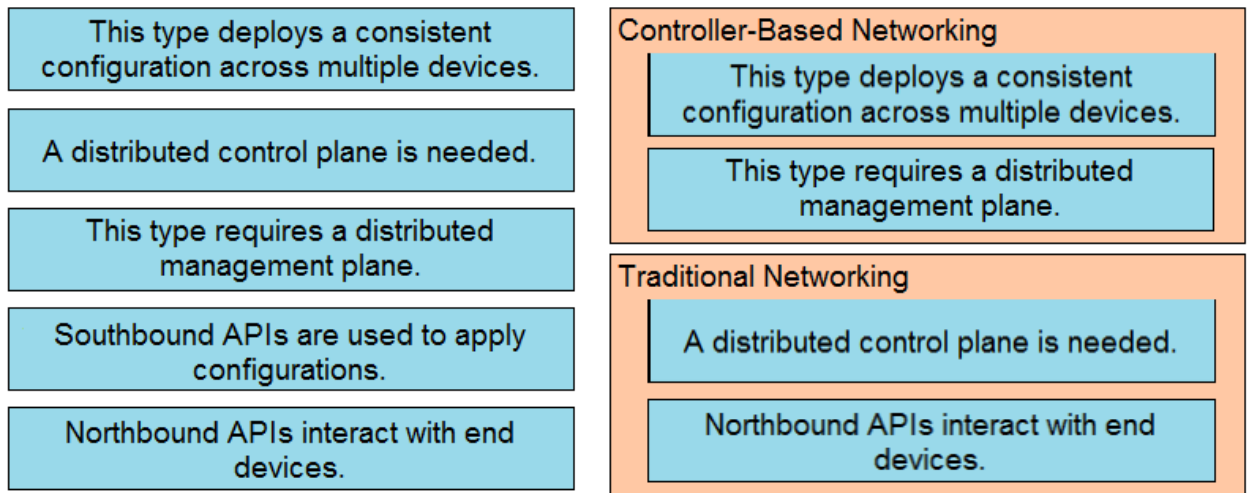

問題 761

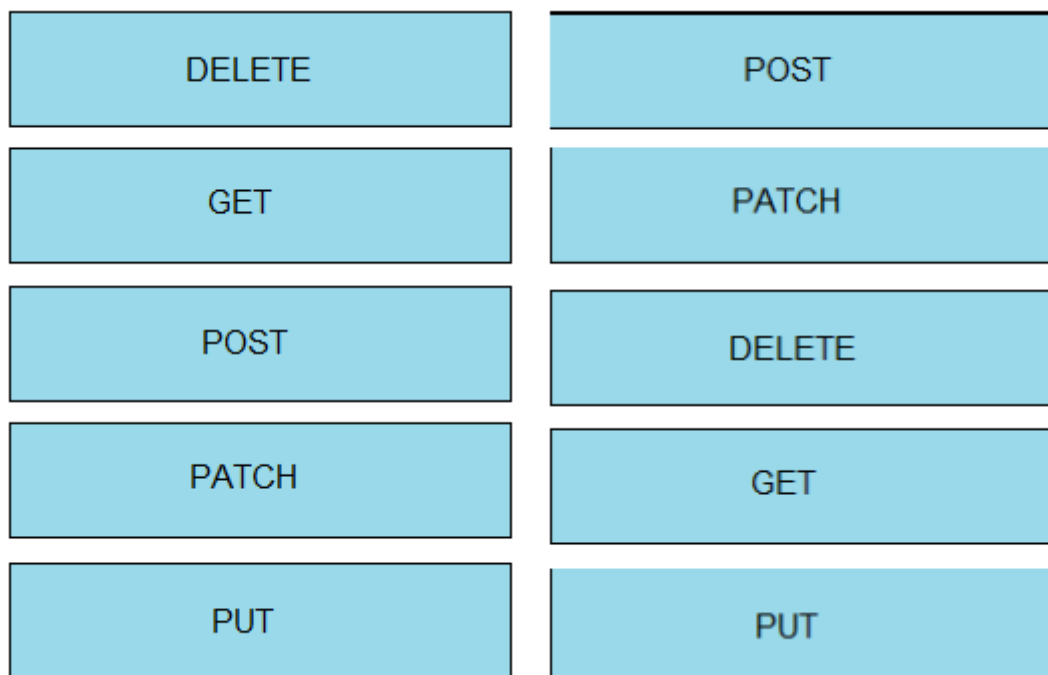

問題 766

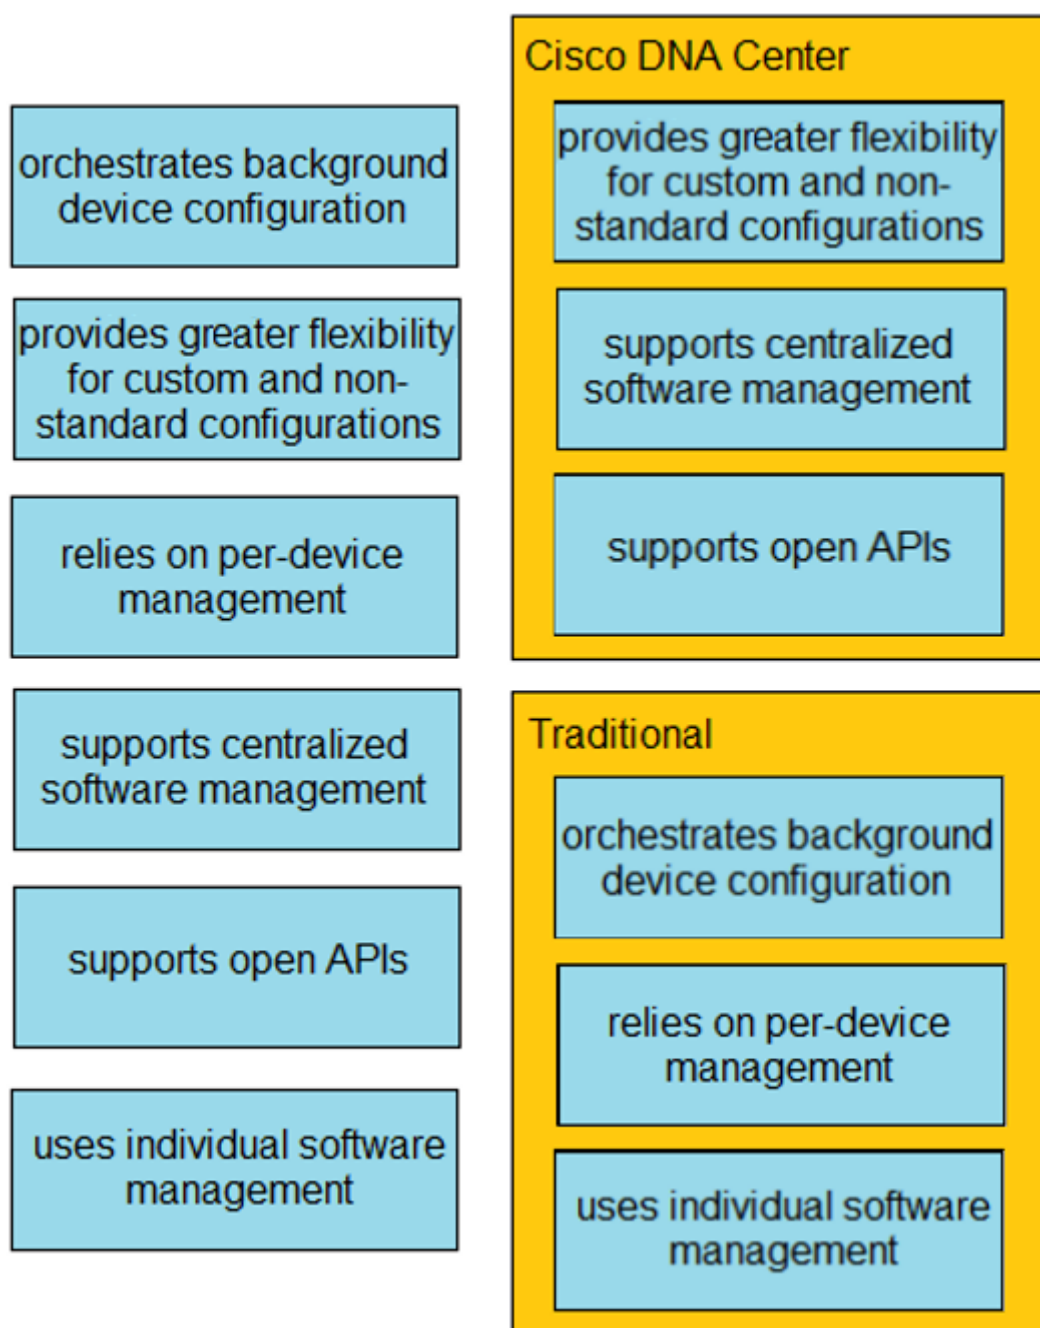

This type of technology provides automation across multiple technologies and domains.

This type of technology enables consistent configuration of infrastructure resources.

Puppet is used for this type of technology.

Ansible is used for this type of technology.

Configuration Management

Puppet is used for this type of technology.

This type of technology enables consistent configuration of infrastructure resources.

Orchestration

This type of technology provides automation across multiple technologies and domains.

Ansible is used for this type of technology.

問題 776

fundamental configuration elements are stored in a manifest

uses TCP port 10002 for configuration push jobs

uses Ruby for fundamental configuration elements

uses SSH for remote device communication

uses TCP 8140 for communication

uses YAML for fundamental configuration elements

Ansible

uses SSH for remote device communication

uses YAML for fundamental configuration elements

Chef

uses TCP port 10002 for configuration push jobs

uses Ruby for fundamental configuration elements

Puppet

fundamental configuration elements are stored in a manifest

uses TCP 8140 for communication

問題 777

DELETE	POST
GET	GET
POST	DELETE
PUT	PUT
PATCH	

問題 778

cacheable	layered system
client-server	cacheable
layered system	uniform interface
stateless	stateless
uniform interface	client-server

問題 779

control node	playbook
inventory	managed node
managed node	control node
module	task
playbook	module
task	inventory

問題 784

Maintenance costs are higher than with other networking options.	Traditional Networking This type implements changes individually at each device. Maintenance costs are higher than with other networking options.
This type provides a centralized view of the network.	
This type implements changes individually at each device.	Controller-Based Networking This type leverages controllers to handle network management. This type provides a centralized view of the network.
This type leverages controllers to handle network management.	

問題 799

absorption	signal-to-noise ratio
noise floor	noise floor
reflection	receiver sensitivity
receiver sensitivity	reflection
signal-to-noise ratio	absorption

問題 801

guest operating system	virtual machine
host operating system	multithreading
hypervisor	host operating system
multithreading	guest operating system
virtual machine	hypervisor

問題 811

802.11a	J Non-Overlapping Channels
802.11b	802.11a
802.11g	802.11b
802.11n 2.4 GHz	802.11n 2.4 GHz
802.11n 5 GHz	2J Non-Overlapping Channels
	802.11g
	802.11n 5 GHz

問題 832

broad network access	on-demand self-service
measured service	measured service
on-demand self-service	resource pooling
rapid elasticity	rapid elasticity
resource pooling	broad network access

問題 852

dynamic access	static access
private	dynamic access
static access	trunk
trunk	tunnel
tunnel	private

問題 868

Appropriate for a small-business environment.	Split-MAC
Work is divided between the access point and the controller.	Work is divided between the access point and the controller.
The access points transmit beacon frames.	Uses the CAPWAP tunneling protocol.
Supports per device configuration and management.	The access points transmit beacon frames.
Uses the CAPWAP tunneling protocol.	Autonomous
	Appropriate for a small-business environment.
	Supports per device configuration and management.

問題 871

Answer Area

access point
virtual interface
dynamic interface
service port
wireless LAN controller

wireless LAN controller
access point
service port
dynamic interface
virtual interface

問題 897

1.1.1.1
10.10.13.126
10.10.13.129
10.10.13.150
10.10.13.209
209.165.200.30

10.10.13.126
10.10.13.129
10.10.13.209
1.1.1.1
10.10.13.150
209.165.200.30

問題 900

255.255.248.0
255.255.255.128
255.255.255.224
255.255.255.240
255.255.255.248
255.255.255.252

255.255.255.252
255.255.255.224
255.255.255.248
255.255.255.128

問題 905

has heard from the neighbor device and is receiving hello packets
is forwarding packets
is ready to forward packets if the device that is currently forwarding packets fails
is transmitting and receiving hello packets
is waiting to hear from the neighbor device

is forwarding packets
is waiting to hear from the neighbor device
is transmitting and receiving hello packets
has heard from the neighbor device and is receiving hello packets
is ready to forward packets if the device that is currently forwarding packets fails

問題 909

ip route 10.10.13.0 255.255.255.128 10.10.10.1	R1
ip route 10.10.13.0 255.255.255.128 10.10.10.5	ip route 10.10.14.0 255.255.255.0 10.10.10.2
ip route 10.10.13.10 255.255.255.255 10.10.10.1	R2
ip route 10.10.14.0 255.255.255.0 10.10.10.2	ip route 10.10.13.0 255.255.255.128 10.10.10.5
ip route 10.10.14.0 255.255.255.0 10.10.10.6	ip route 10.10.13.10 255.255.255.255 10.10.10.1
ip route 10.10.14.10 255.255.255.255 10.10.10.6	R3
	ip route 10.10.14.10 255.255.255.255 10.10.10.6

問題 928

10.10.10.16	Internet
10.10.13.1	10.10.10.16
10.10.13.129	10.10.13.129
10.10.13.150	10.10.100.128
10.10.100.128	Router1
	10.10.13.1
	10.10.13.150

問題 936

172.16.3.128	172.16.4.0
172.16.3.64	172.16.2.128
172.16.2.128	172.16.3.64
172.16.3.192	172.16.3.128
172.16.4.0	172.16.3.192

問題 938

All protocols are up.

OSPF and eBGP are down.

The static route and eBGP are down.

The static route and EIGRP are down.

The static route and OSPF are down.

eBGP

The static route and EIGRP are down.

The static route and OSPF are down.

EIGRP

The static route and eBGP are down.

Static

All protocols are up.

OSPF and eBGP are down.

問題 950

agent

managed device

MIB

NMS

MIB

NMS

managed device

agent

問題 956

classification

marking

policing

queuing

queuing

marking

classification

policing

問題 958

An endpoint submits a request for the IP address of a domain name.	An endpoint submits a request for the IP address of a domain name.
The DNS submits a request to the domain DNS server.	The DNS submits a request to a root DNS server.
The DNS receives a reply from the domain DNS server.	The DNS submits a request to the domain DNS server.
The DNS responds to the endpoint.	The DNS receives a reply from the domain DNS server.
The DNS submits a request to a root DNS server.	The DNS responds to the endpoint.

問題 960

ip domain-lookup	ip host switch_1 192.168.0.1
ip domain-name	ip domain-name
ip host switch_1 192.168.0.1	show hosts
ip name-server	ip domain-lookup
show hosts	ip name-server

問題 963

ip dns server	ip domain lookup source-interface
ip domain list	ip dns server
ip domain lookup source-interface	ip name-server
ip domain name	ip domain list
ip host	ip domain name
ip name-server	ip host

問題 970

Answer Area

Configure the 802.1x authentication protocol	Configure the native VLAN with a nondefault VLAN
Configure the DHCP snooping feature	Configure the DHCP snooping feature
Configure the native VLAN with a nondefault VLAN	Configure the 802.1x authentication protocol
Disable Dynamic Trunking Protocol – switch-spoofing VLAN-hopping attack	Disable Dynamic Trunking Protocol – switch-spoofing VLAN-hopping attack

問題 975

It grants access to network assets, such as FTP servers.	Authentication
It restricts the CLI commands that a user is able to perform.	It performs user validation via TACACS+.
It performs user validation via TACACS+.	It verifies “who you are”.
It records the duration of each connection.	Authorization
It supports User Access Reporting.	It grants access to network assets, such as FTP servers.
It verifies “who you are”.	It restricts the CLI commands that a user is able to perform.

問題 989

It assigns per-user attributes.	Authentication
It reaches the CLI commands that a user is able to perform.	It permits and derives login attempts.
It permits and derives login attempts.	It supports local, PPP, RADIUS, and TACACS+ options.
It records the amount of network resources consumed by the user.	Authorization
It supports local, PPP, RADIUS, and TACACS+ options.	It assigns per-user attributes.
It tracks the services that a user is using.	It reaches the CLI commands that a user is able to perform.

問題 992

It grants access to network assets, such as FTP servers.	Accounting
It limits the services available to a user.	It records the duration of each connection.
It performs user validation via TACACS+.	It supports User Access Reporting.
It records the duration of each connection.	Authorization
It supports User Access Reporting.	It performs user validation via TACACS+.
It verifies "who you are".	It verifies "who you are".

問題 1001

supports automation	supports automation
communicates between the SDN controller and the application plane	communicates between the SDN controller and the application plane
communicates between the SDN controller and the data plane	supports data sharing between systems
supports data sharing between systems	supports REST-based requirements
supports network virtualization protocols	
supports REST-based requirements	
uses OpenFlow to interface between the data and control planes	

問題 1008

leverages Cisco Prime Infrastructure
reduces the workload for enterprise customers
requires manual configuration of complex protocols
lacks support for SDA
uses algorithms to detect security threats
uses northbound APIs

Traditional Campus Device Management
leverages Cisco Prime Infrastructure
reduces the workload for enterprise customers
requires manual configuration of complex protocols
Cisco DNA Center
lacks support for SDA
uses algorithms to detect security threats
uses northbound APIs

問題 1018

executes modules via SSH by default
uses the YAML language
uses agents to manage hosts
pushes configurations to the client
requires clients to pull configurations from the server
operates without agents

executes modules via SSH by default
uses the YAML language
pushes configurations to the client
operates without agents

問題 1021

overlay and underlay configuration
routed access deployment
STP deployment
VLAN and HSRP configuration
VXLAN and LISP configuration
configuration via console

Cisco DNA Center
overlay and underlay configuration
routed access deployment
VXLAN and LISP configuration
Traditional
STP deployment
VLAN and HSRP configuration
configuration via console

問題 1024

It uses multiple tools and applications to analyze and troubleshoot different types of data.
It manages device configurations on a per-device basis.
It provides a single interface for network security and analytics.
Security is managed near the perimeter of the network with firewalls, VPNs, and IPS.
It supports CLI templates to apply a consistent configuration to multiple devices.
It uses NetFlow to analyze potential security threats and take appropriate action on that traffic.

Cisco DNA Center Device Management
It provides a single interface for network security and analytics.
It supports CLI templates to apply a consistent configuration to multiple devices.
It uses NetFlow to analyze potential security threats and take appropriate action on that traffic.
Traditional Device Management
It manages device configurations on a per-device basis.
Security is managed near the perimeter of the network with firewalls, VPNs, and IPS.
It uses multiple tools and applications to analyze and troubleshoot different types of data.

問題 1028

agent	post
agentless	provision
provision	agentless
pull	pull
push	agent
post	

問題 1041

```
SW1(config)#interface range eth0/0-1
SW1(config-if-range)# channel-group 44 mode active
SW1(config-if-range)# interface port44
SW1(config-if)# switchport trunk encapsulation dot1q
SW1(config-if)# switchport mode trunk
SW1(config-if)# switchport trunk naïve vlan 746
SW1(config-if)# no shut
SW1(config-if)# end
```

```
SW2(config)#interface range eth0/0-1
SW2(config-if-range)# channel-group 44 mode active
SW2(config-if-range)# interface port44
SW2(config-if)# switchport trunk encapsulation dot1q
SW2(config-if)# switchport mode trunk
SW2(config-if)# switchport trunk naïve vlan 746
SW2(config-if)# no shut
SW2(config-if)# end
```

This assumes that VLAN 746 is the MONITORING VLAN.

問題 1043

R3

config terminal

ip route 192.168.1.1 255.255.255.255 209.165.200.229

end

copy running start

R2

config terminal

ip route 0.0.0.0 0.0.0.0 209.165.202.130

ipv6 route ::/0 2001:db8:abcd::2

end

copy running start

問題 1052

conf t

R1(config)#ntp master 1

R2(config)#ntp server 10.1.2.1

Exit

R1#clock set 00:00:00 jan 1 2019

ip dhcp pool TEST

network 10.1.3.0 255.255.255.0

ip dhcp excluded-address 10.1.3.1 10.1.3.10

R3(config)#int e0/2

ip address dhcp

no shut

crypto key generate RSA 1024

Copy run start

問題 1054

SW1

```
enable
conf t
vlan 100
name Compute
vlan 200
name Telephony
int e0/1
switchport voice vlan 200
switchport access vlan 100
int e0/0
switchport mode access
wr mem
```

SW2

```
Vlan 99
Name Available
Int e0/1
Switchport access vlan 99
wr mem
```

```
R1
config terminal
ipv6 unicast-routing
inter eth0/1
ip addre 192.168.180.1 255.255.255.240
ipv6 addre 2001:db8:acca::1/64
no shut
end
copy running start
```

```
R2
config terminal
ipv6 unicast-routing
inter eth0/1
ip address 192.168.180.14 255.255.255.240
ipv6 address 2001:db8:acca::2/64
no shut
end
copy running start
```

問題 1059

Sw1

```
enable
config t
Vlan 303
Name FINANCE
Inter e0/1
Switchport access vlan 303
Wr mem
```

Sw2

```
Enable
config t
Vlan 202
Name MARKETING
Int e0/1
Switchport access vlan 202
Wr mem
```

Sw3

```
Enable
config t
Vlan 202
Name MARKETING
Vlan 303
Name FINANCE
Int e0/0
Switchport access vlan 202
Int e0/1
Switchport access vlan 303
Sw1
Int e0/1
Switchport allowed vlan 303
Sw2
Int e0/2
Switchport trunk allowed vlan 303
Sw3
Int e0/3
Switchport trunk allowed vlan 303
Switchport trunk allowed vlan 202, 303
```

Sw101

Config t

Username support password max2learn privilege 15

Line vty 0 4

Login local

Transport input telnet

Access-class 10

Access-list ENT-ACL permit icmp host 192.168.200.10 host 182.168.100.10

Access-list ENT-ACL deny icmp any any

Access-list ENT-ACL permit ip any any

Access-list 10 permit 192.168.200.10

Interface vlan 200

ip access-group ENT-ACL in

interface ethernet 0/0

switchport port-security

switchport port-security maximum 4

switchport port-security violation protect

switchport port-security mac-address sticky

wr mem

問題 1061

Gw1:

Config t

Username wheel secret lock3path privilege 15

Line vty 0 4

Login local

Transport input telnet

Access-list CORP_ACL permit tcp any any eq bootp

Access-list CORP_ACL permit tcp any any eq https

Access-list CORP_ACL deny ip any any log

Interface vlan 10

ip access-group CORP_ACL in

wr mem

Sw1:

Config t

Interface vlan 10

ip dhcp snooping

ip dhcp snooping information

ip dhcp snooping verify mac-address

p dhcp relay information trusted

wr mem

問題 1068

Answer Area

ff00:af60:767d:9258:e688:c478:ec75:12

2000:6794:5699:e122:42e0:4236:085d:1

fe80:b680:8af8:7cc1:6df1:71e1:b8f3:7

fc00:a4d3:af37:cbc6:cdbd:b73d:5561:3

fc00:a4d3:af37:cbc6:cdbd:b73d:5561:3

fe80:b680:8af8:7cc1:6df1:71e1:b8f3:7

2000:6794:5699:e122:42e0:4236:085d:1

ff00:af60:767d:9258:e688:c478:ec75:12

問題 1072

```

R2:
Conf t
Ip route 192.168.1.0 255.255.255.0 10.10.31.1
Ip route 172.20.20.128 255.255.255.128 e0/2
Ip route 172.20.20.128 255.255.255.128 e0/1

```

```

R1:
conf t
Ip route 0.0.0.0 0.0.0.0 10.10.13.3
Ip route 192.168.0.0 255.255.255.0 e0/1
Ip route 192.168.0.0 255.255.255.0 10.10.12.2 3

```

問題 1081

Answer Area

contains a single solid conductor
is typically used for DWDM optical systems spanning long distances
eliminates distortion from overlapping light pulses
is affected by electrical and magnetic interference

copper
contains a single solid conductor
is affected by electrical and magnetic interference
single-mode fiber
is typically used for DWDM optical systems spanning long distances
eliminates distortion from overlapping light pulses

問題 1086

Answer Area

contains a single solid conductor
is typically used for DWDM optical systems spanning long distances
uses a single wavelength of light
transmits data in the form of electronic signals

copper
contains a single solid conductor
transmits data in the form of electronic signals
single-mode fiber
is typically used for DWDM optical systems spanning long distances
uses a single wavelength of light

問題 1087

Answer Area

is typically used in small office applications

is typically used for internal datacenter connectivity

has increased attenuation over long distances

is comprised of shielded and unshielded twisted pairs

copper

is typically used in small office applications

is comprised of shielded and unshielded twisted pairs

multimode fiber

is typically used for internal datacenter connectivity

has increased attenuation over long distances

問題 1088

Answer Area

is ideal longer distances with little loss of integrity

is not easily broken

contains a single solid conductor

has minimal light reflection as it travels down the core

single-mode fiber

is ideal longer distances with little loss of integrity

has minimal light reflection as it travels down the core

copper

is not easily broken

contains a single solid conductor

問題 1089

Answer Area

uses a single wavelength on light

becomes distorted at longer lengths

transmits data up to 100 Gbits which degrades over distance

has minimal light reflection as it travels down the core

single-mode fiber

uses a single wavelength on light

has minimal light reflection as it travels down the core

multimode fiber

becomes distorted at longer lengths

transmits data up to 100 Gbits which degrades over distance

問題 1090

Answer Area

2000:2eb8:3e5f:376c:da66:bf1d:d36a:1

fc00:1664:bc95:3c7a:c300:c468:3969:3

fe80:e6ab:b5f9:c358:ea58:0029:b4db:7

ff00:c279:edd5:99c4:b0de:fc11:4b12:12

問題 1091

Answer Area

uses a single wavelength of light

is comprised of shielded and unshielded twisted pairs

contains a conductor, bedding, and sheathing

has a core diameter of 9 microns

single-mode fiber

uses a single wavelength of light

has a core diameter of 9 microns

copper

is comprised of shielded and unshielded twisted pairs

contains a conductor, bedding, and sheathing

問題 1092

Answer Area

ff00:a648:6ad8:4591:80a2:75db:4b5f:12

fe80:9885:e8c7:6f41:ac11:b954:cc04:7

fc00:6fd1:6158:034c:6144:eafe:8da6:3

2000:fda9:65b0:e8c0:1d84:6369:2daa:1

2000:fda9:65b0:e8c0:1d84:6369:2daa:1

fc00:6fd1:6158:034c:6144:eafe:8da6:3

fe80:9885:e8c7:6f41:ac11:b954:cc04:7

ff00:a648:6ad8:4591:80a2:75db:4b5f:12

問題 1093

Answer Area

is ideal over longer distances with little loss of integrity
uses a single wavelength on light
has a core diameter of either 62.5 or 50 microns
is typically used for DWDM optical systems spanning long distances

single-mode fiber
is ideal over longer distances with little loss of integrity
uses a single wavelength on light
multimode fiber
is typically used for DWDM optical systems spanning long distances
has a core diameter of either 62.5 or 50 microns

問題 1101

Answer Area

ff00:0a7c:cf36:cd7c:6dad:44fa:c11c:12	2000:0962:6dee:8c78:93b8:c429:c78d:1
fe80:27bb:1ef9:6b3d:b347:686f:f3b7:7	fc00:9e81:2346:4929:7fec:34e9:7b8c:3
fc00:9e81:2346:4929:7fec:34e9:7b8c:3	fe80:27bb:1ef9:6b3d:b347:686f:f3b7:7
2000:0962:6dee:8c78:93b8:c429:c78d:1	ff00:0a7c:cf36:cd7c:6dad:44fa:c11c:12

問題 1102

Answer Area

may be used by multiple organizations
at the same time

sends packets to a group address
rather than a single address

provides one-to-many communications

allows sites to be combined without
address conflicts

Unique Local

may be used by multiple organizations
at the same time

allows sites to be combined without
address conflicts

Multicast

sends packets to a group address
rather than a single address

provides one-to-many communications

問題 1103

Answer Area

may be used by multiple organizations
at the same time

attached to a single subnet

required on all IPv6 devices

is a counterpart of private IPv4 address

Unique Local

may be used by multiple organizations
at the same time

is a counterpart of private IPv4 address

Link-Local Address

attached to a single subnet

required on all IPv6 devices

問題 1112

Answer Area

DHCP server	snooping binding database
snooping binding database	DHCP server
spurious DHCP server	trusted
trusted	spurious DHCP server
untrusted	untrusted

問題 1114

Answer Area

is a counterpart of private IPv4 addresses	Unique Local is a counterpart of private IPv4 addresses
sends packets to a group address rather than a single address	allows sites to be combined without address conflicts
has a unicast source sent to a group	Multicast sends packets to a group address rather than a single address
allows sites to be combined without address conflicts	has a unicast source sent to a group

問題 1115

Answer Area

uses a single wavelength on light

becomes distorted at longer lengths

is typically used for internal datacenter connectivity

has minimal light reflection as it travels down the core

multimode fiber

is typically used for internal datacenter connectivity

becomes distorted at longer lengths

single-mode fiber

uses a single wavelength on light

has minimal light reflection as it travels down the core

問題 1119

Answer Area

2000:87aa:84ab:fdd9:5ac3:41a5:ef72:1

fc00:c51f:922d:0c12:9c54:7644:28f5:3

fe80:ccc7:17f1:5d15:f611:5cea:ef92:7

ff00:520a:3e47:de13:fe6f:476e:5325:12

2000:87aa:84ab:fdd9:5ac3:41a5:ef72:1

fe80:ccc7:17f1:5d15:f611:5cea:ef92:7

ff00:520a:3e47:de13:fe6f:476e:5325:12

fc00:c51f:922d:0c12:9c54:7644:28f5:3

問題 1125

uses multiple wavelengths of light

has a core diameter of 9 microns

has increased attenuation over long distances

uses a single wavelength of light

multimode fiber

uses multiple wavelengths of light

has increased attenuation over long distances

single-mode fiber

has a core diameter of 9 microns

uses a single wavelength of light

問題 1127

- is assigned to multiple devices on the same network simultaneously
- cannot be used as a source address
- is routed to the nearest interface that has the address
- provides one-to-many communications

- Anycast**
- is routed to the nearest interface that has the address
 - cannot be used as a source address

- Multicast**
- is assigned to multiple devices on the same network simultaneously
 - provides one-to-many communications

問題 1130

- It grants access to network assets, such as FTP servers.
- It restricts the CLI commands that a user is able to perform.
- It performs user validation via TACACS+.
- It records the duration of each connection.
- It supports User Access Reporting.
- It verifies "who you are".

- Accounting**
- It records the duration of each connection.
 - It supports User Access Reporting.

- Authorization**
- It grants access to network assets, such as FTP servers.
 - It restricts the CLI commands that a user is able to perform.

問題 1132

fe80:cc72:4b9e:445c:8179:0420:5988:7

2000:1092:a1e8:827d:527c:3ce7:9816:1

2000:1092:a1e8:827d:527c:3ce7:9816:1

fe80:cc72:4b9e:445c:8179:0420:5988:7

ff00:ec6c:dbb1:3e8b:6d46:bd27:a236:12

ff00:ec6c:dbb1:3e8b:6d46:bd27:a236:12

fc00:9860:653f:5146:8cb2:a27c:cb6f:3

fc00:9860:653f:5146:8cb2:a27c:cb6f:3

問題 1134

R1

```
conf terminal
interface Loopback0
ip address 10.10.1.1 255.255.255.255
!
interface Loopback1
ip address 192.168.1.1 255.255.255.0
!
interface Ethernet0/0
no shut
ip address 10.10.12.1 255.255.255.0
ip ospf 1 area 0
duplex auto
!
interface Ethernet0/1
no shut
ip address 10.10.13.1 255.255.255.0
ip ospf 1 area 0
duplex auto
!
router ospf 1
router-id 10.10.12.1
network 10.10.1.1 0.0.0.0 area 0
network 192.168.1.0 0.0.0.255 area 0
!
copy run star
```

R2

```
conf terminal
interface Loopback0
ip address 10.10.2.2 255.255.255.255
!
interface Loopback1
ip address 192.168.2.2 255.255.255.0
!
interface Ethernet0/0
no shut
ip address 10.10.12.2 255.255.255.0
ip ospf priority 255
ip ospf 1 area 0
duplex auto
!
interface Ethernet0/2
no shut
ip address 10.10.23.2 255.255.255.0
ip ospf priority 255
ip ospf 1 area 0
duplex auto
!
router ospf 1
network 10.10.2.2 0.0.0.0 area 0
network 192.168.2.0 0.0.0.255 area 0
!
copy runs start
```

R3

```
conf ter
interface Loopback0
ip address 10.10.3.3 255.255.255.255
!
interface Loopback1
ip address 192.168.3.3 255.255.255.0
!
interface Ethernet0/1
no shut
ip address 10.10.13.3 255.255.255.0
ip ospf 1 area 0
duplex auto
!
interface Ethernet0/2
no shut
ip address 10.10.23.3 255.255.255.0
ip ospf 1 area 0
duplex auto
!
router ospf 1
network 10.10.3.3 0.0.0.0 area 0
network 192.168.3.0 0.0.0.255 area 0
!
copy run start
!
```

問題 1135

Answer Area

Anycast

- is assigned to more than one interface
- is used exclusively by a non-host device

Multicast

- provides one-to-many communications
- cannot be used as a source address

問題 1137

Answer Area

copper

- uses a single wavelength of light
- is ideal over longer distances with little loss of integrity

single mode fiber

- contains a conductor, bedding, and sheathing
- is typically used in small office applications

問題 1144

Unique Local

- is unable to route on the internet
- allows sites to be combined without address conflicts

Multicast

- has a unicast source sent to a group
- sends packets to a group address rather than a single address

問題 1147

Answer Area

- standard Web browsing traffic
- video traffic
- database synchronization traffic
- VoIP traffic

問題 1153

Answer Area

copper

contains a conductor, bedding, and sheathing

is typically used in small office applications

single-mode fiber

is typically used for DWDM optical systems spanning long distances

eliminates distortion from overlapping light pulses

問題 1155

Answer Area

- POST
- DELETE
- PUT
- PATCH
- GET

問題 1165

Is easy to tap into and obtain secure information

is affected by electrical and magnetic interference

transmits data of up to 40Gbit/s over long distances

has minimal light reflection as it travels down the core

問題 1170

The diagram illustrates the properties of Unique Local Address (ULA) within a yellow-bordered box. It contains two light blue rectangular boxes. The top box states that the address "is unable to route on the internet". The bottom box states that it "allows sites to be combined without address conflicts".

Unique Local

is unable to route on the internet

allows sites to be combined without address conflicts

is unable to route on the internet

allows sites to be combined without address conflicts

Multicast

- provides one-to-many communications
- sends packets to a group address rather than a single address

provides one-to-many communications

sends packets to a group address rather than a single address

2000:6166:6ba9:cde4:d89e:4c4a:bdc8:1

fe80:ae46:d315:41c8:4593:12dc:9827:7

ff00:a8bb:b2a1:7490:4ef0:f603:109b:12

fc00:382e:29e1:f7e2:1573:ff4f:04f9:3

問題 1175

```
# SW2 Configuration
enable
conf t

vlan 20
name SERVER1

vlan 30
name SALES

int e0/2
switchport mode access
switchport access vlan 20
no shutdown

int e0/3
switchport mode access
switchport access vlan 30
no shutdown

end
wr

# SW1 Configuration
enable
conf t

int e0/1
no cdp enable
no shutdown
```

問題 1178

R1:

```
Ip route 10.0.41.10 255.255.255.255 10.0.12.2  
Ip route 10.0.41.0 255.255.255.0 10.0.12.2 200  
Ip route 10.0.41.0 255.255.255.0 10.0.13.2
```

R2:

```
Ip route 0.0.0.0 0.0.0.0. 209.165.200.225
```

問題 1182

- To subnet 172.25.0.0/16 to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the host portion of the address to create enough subnets for 32 sites. Since 32 is 2^5 , you need to borrow 5 bits, which means your new subnet mask will be /21 or 255.255.248.0. To find the second subnet, you need to add the value of the fifth bit (32) to the third octet of the network address (0), which gives you 172.25.32.0/21 as the second subnet. The first usable IP address in this subnet is 172.25.32.1, and the last usable IP address is 172.25.39.254.

- To assign the first usable IP address to e0/0 on Sw101, you need to enter the following commands on the device console:

```
Sw101#configure terminal
Sw101(config)#interface e0/0
Sw101(config-if)#ip address 172.25.32.1 255.255.248.0
Sw101(config-if)#no shutdown
Sw101(config-if)#end
```

- To assign the last usable IP address to e0/0 on Sw102, you need to enter the following commands on the device console:

```
Sw102#configure terminal
Sw102(config)#interface e0/0
Sw102(config-if)#ip address 172.25.39.254 255.255.248.0
Sw102(config-if)#no shutdown
Sw102(config-if)#end
```

- To subnet an IPv6 GUA to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the interface identifier portion of the address to create enough subnets for 32 sites. Since 32 is 2^5 , you need to borrow 5 bits, which means your new prefix length will be /69 or `fff:fff:fff:fff8::/69` (assuming that your IPv6 GUA has a /64 prefix by default). To find the second subnet, you need to add the value of the fifth bit (32) to the fourth hextet of the network address (0000), which gives you `xxxx:xxxx:xxxx:0020::/69` as the second subnet (where `xxxx:xxxx:xxxx` is your IPv6 GUA prefix). The first and last IPv6 addresses in this subnet are `xxxx:xxxx:xxxx:0020::1` and `xxxx:xxxx:xxxx:0027:fff:fff:fff:ffe` respectively.
- To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on Sw101, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw101#configure terminal
Sw101(config)#interface e0/0
Sw101(config-if)#ipv6 address 2001:db8::20::1/69
Sw101(config-if)#no shutdown Sw101(config-if)#end
```

- To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on Sw102, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw102#configure terminal
Sw102(config)#interface e0/0
Sw102(config-if)#ipv6 address 2001:db8::27:fff:fff:ffe/69
Sw102(config-if)#no shutdown Sw102(config-if)#end
```

問題 1186

copper

is typically used in small office applications

is not easily broken

single-mode fiber

transmits data of up to 40Gbit/s over long distances

eliminates distortion from overlapping light pulses

問題 1188

2000:4011:2a0d:d571:1976:4bab:adb7:1

fe80:5db2:1f32:0ee4:32a3:855f:b0d5:7

ff00:b823:1dc6:263b:ba6a:50f5:15b7:12

fc00:e896:c4cd:422b:7660:59e5:dd00:3

問題 1190

Unique Local

may be used by multiple organizations at the same time

- allows sites to be combined without address conflicts

Multicast

cannot be used as a source address

- has a unicast source sent to a group

問題 1216

R1:

config t

ip route 0.0.0.0 0.0.0.0 10.0.12.2

ip route 10.0.41.0 255.255.255.0 10.0.13.2

R2:

config t

ip route 0.0.0.0 0.0.0.0 209.165.200.225

ip route 10.0.41.10 255.255.255.255 10.0.24.2

問題 1256

Multicast
never used as a source address
provides one-to-many communications

Unique Local
allows sites to be combined without address conflicts
unable to route on the internet

問題 1258

Task 1. Configure SW-1 with VLAN 15 and label it exactly as OPS

```
SW-1(config)#vlan 15
SW-1(config-vlan)#name OPS
SW-1(config-vlan)#exit //To apply the VLAN configured
```

Task 2. Configure SW-2 with VLAN 66 and label it exactly as ENGINEERING

```
SW-2(config)#vlan 66
SW-2(config-vlan)#name ENGINEERING
SW-2(config-vlan)#exit //To apply the VLAN configured
```

Task 3. Configure the switch port connecting to PC1

```
SW-1(config)#int e0/1
SW-1(config-if)#switchport mode access
SW-1(config-if)#switchport access vlan 15
SW-1(config-if)#no shut
```

Task 4. Configure the switch port connecting to PC2

```
SW-2(config)#int e0/1
SW-2(config-if)#switchport mode access
SW-2(config-if)#switchport access vlan 66
SW-2(config-if)#no shut
```

Task 5. Configure the E0/2 connections on SW-1 and SW-2 for neighbor discovery using the vendor-neutral standard protocol and ensure that e0/0 on both switches uses the Cisco proprietary protocol

“neighbor discovery using the vendor-neutral standard protocol” means LLDP while “Cisco proprietary protocol” means CDP.

On both SW-1 and SW-2

```
SW-1(config)#lldp run
SW-2(config)#lldp run
```

```
SW-1(config)#int e0/0
SW-1(config-if) no lldp transmit
SW-1(config-if) no lldp recieve
SW-1(config-if) cdp enable
```

```
SW-2(config)#int e0/0
SW-2(config-if) no lldp transmit
SW-2(config-if) no lldp recieve
SW-2(config-if) cdp enable
```

Task 1. Configure SW-1 with VLAN 15 and label it exactly as OPS

```
SW-1(config)#vlan 35
SW-1(config-vlan)#name SALES
SW-1(config-vlan)#exit //To apply the VLAN configured
```

Task 2. Configure SW-2 with VLAN 66 and label it exactly as ENGINEERING

```
SW-2(config)#vlan 39
SW-2(config-vlan)#name MARKETING
SW-2(config-vlan)#exit //To apply the VLAN configured
```

Task 3. Configure the switch port connecting to PC1

```
SW-1(config)#int e0/2
SW-1(config-if)#switchport mode access
SW-1(config-if)#switchport access vlan 35
SW-1(config-if)#no shut
```

Task 4. Configure the switch port connecting to PC2

```
SW-2(config)#int e0/2
SW-2(config-if)#switchport mode access
SW-2(config-if)#switchport access vlan 39
SW-2(config-if)#no shut
```

Task 5. Configure SW-1 and SW-2 for universal neighbor discovery using the industry standard protocol and disable it on the interface connecting to PC1

“neighbor discovery using the vendor-neutral standard protocol” means LLDP while “Cisco proprietary protocol” means CDP.

On both SW-1 and SW-2

```
SW-1(config)#lldp run
SW-2(config)#lldp run
```

On SW-1

```
SW-1(config)#int e0/2
SW-1(config-if) no lldp transmit
SW-1(config-if) no lldp recieve
```

Unique Local

may be used by multiple organizations at the same time

counterpart of private IPv4 addresses

Global Unicast Address

publicly routable in the same way as IPv4 addresses

provides for one-to-one communication

問題 1266

SW-1

Interface e0/0

Channel-group 12 mode active

Interface e0/1

Channel-group 12 mode active

Interface port-channel 12

Switchport trunk encapsulation dot1q

Switchport mode trunk

Switchport trunk native vlan 35

Interface e0/2

Switchport trunk native vlan 35

SW-2

Interface e0/0

Channel-group 12 mode passive

Interface e0/1

Channel-group 12 mode passive

Interface port-channel 12

Switchport trunk encapsulation dot1q

Switchport mode trunk

Switchport trunk native vlan 35

Interface e0/2

Switchport trunk native vlan 35

SW-3

Interface e0/0

Switchport trunk native vlan 35

Interface e0/1

Switchport trunk native vlan 35

copper

- is easy to tap into and obtain secure information
- transmits data in the form of electronic signals

multi-mode fiber

- transmits signals using pulses of light
- contains a core, cladding, and coating

問題 1271



copper

- is easy to tap into and obtain secure information
- is comprised of shielded and unshielded twisted pairs

multi-mode fiber

- attenuation increases over long distances
- vulnerable to damage when handled


問題 1272

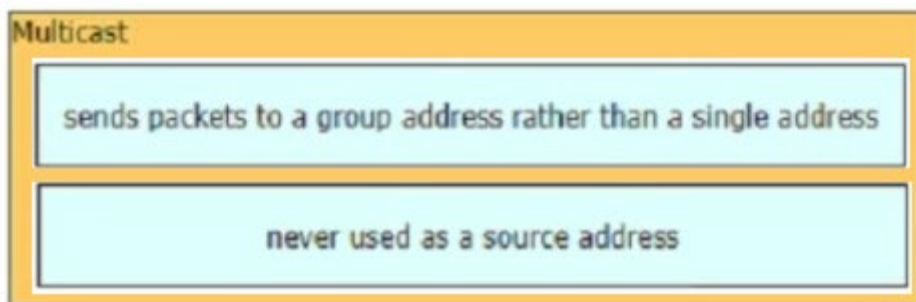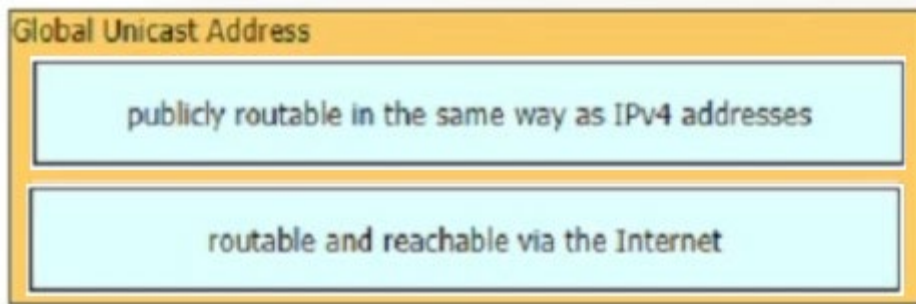

問題 1275



問題 1277

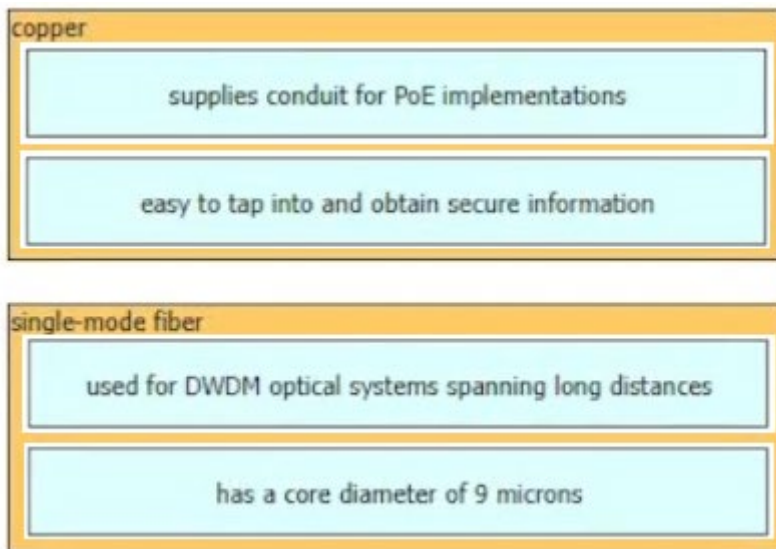

問題 1282

2000:e2a1:a1ee:03ed:39a0:4f8e:9f02:1

fe80:efae:0b2a:56fe:4a87:147f:dc21:7

fc00:733d:b542:a948:d7fa:eeea:989a:3

ff00:3b64:fbca:171a:6140:6a35:1ea6:12

問題 1284

copper

affected by electrical and magnetic interference

easy to tap into and obtain secure information

multi-mode fiber

increased refraction between cladding and core as it travels

transmits signals using pulses of light

問題 1285

SW-2

Config t

Interface e0/0

switchport mode trunk

switchport trunk encapsulation dot1q

switchport access vlan 10

switchport trunk native vlan 11

Interface e0/2

switchport mode trunk

switchport trunk encapsulation dot1q

channel-group 23 mode passive

Interface e0/3

switchport mode trunk

switchport trunk encapsulation dot1q

channel-group 23 mode passive

interface port-channel 23

switchport mode trunk

switchport trunk encapsulation dot1q

SW-3

Config t

Interface e0/0

switchport mode trunk

switchport trunk encapsulation dot1q

switchport access vlan 10

switchport trunk native vlan 11

Interface e0/2

switchport mode trunk

switchport trunk encapsulation dot1q

channel-group 23 mode active

Interface e0/3

switchport mode trunk

switchport trunk encapsulation dot1q

channel-group 23 mode active

interface port-channel 23

switchport mode trunk

switchport trunk encapsulation dot1q

問題 1289

Link-Local Address

serves as the next-hop addresses in IGP

confined to a single link

Multicast

has a unicast source sent to a group

never used as a source address

問題 1292

207.165.200.244/30

192.168.2.0/24

192.168.1.0/24

172.16.2.0/24

207.165.200.248/30

問題 1295

```
SW101:
Sw101>en
Sw101#conf t
Sw101(config)#int g1/0/1
Sw101(config-if)#no switchport
Sw101(config-if)#ip add 172.16.16.1 255.255.240.0
Sw101(config-if)#ipv6 address 2001:db8:0:400::/54 eui-64
Sw101(config-if)#no shutdown
Sw101(config-if)#end
Sw101#wr
```

```
SW102:
Sw102>en
Sw102#conf t
Sw102(config)#int g1/0/1
Sw102(config-if)#no switchport
Sw102(config-if)#ip add 172.16.31.254 255.255.240.0
Sw102(config-if)#ipv6 address 2001:db8:0:400::/54 eui-64
Sw102(config-if)#no shutdown
Sw102(config-if)#end
Sw102#wr
```

2001:db8::/50 main prefix to get 16 subnets i need 4 bits binary
2001:db8:000:00 0000 0000000000::/54 → First subnet
2001:db8:000:00 0001 0000000000::/54 → second 2001:db8:0:400::/54
2001:db8:000:00 0010 0000000000::/54 → third subnet
2001:db8:000:00 0011 0000000000::/54 → fourth subnet