

FRONT VIEW – SIDE A

1:10

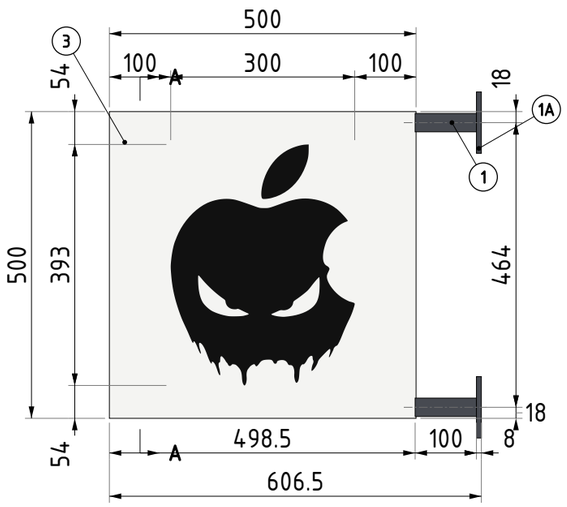


VIEW FROM WALL

1:10

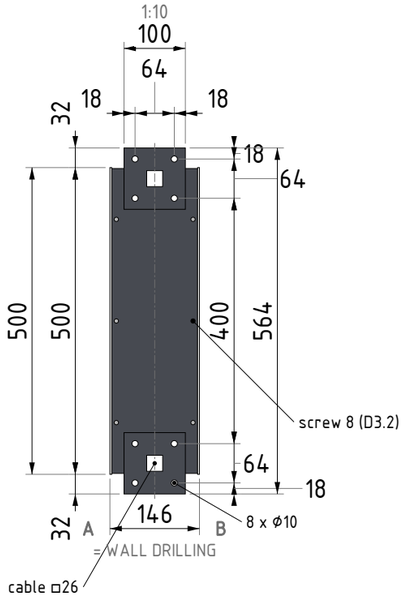


FRONT VIEW – SIDE B

1:10 (mirrored)

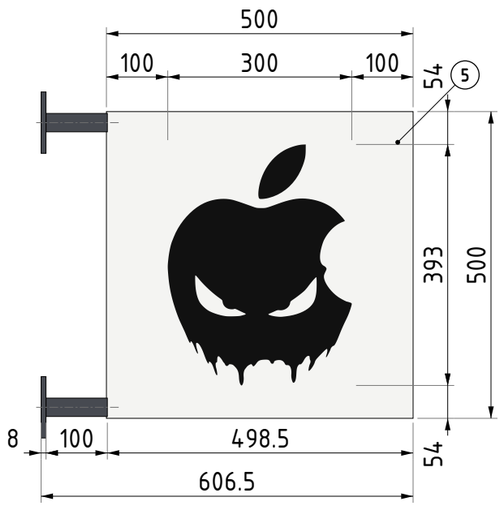


SECTION A–A

1:8

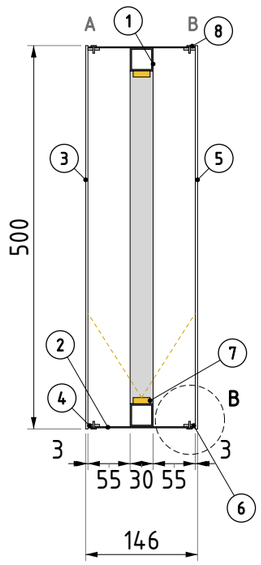

ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

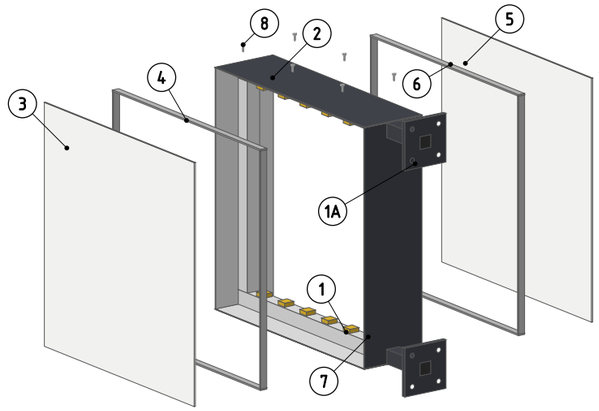



3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE




3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE


TOP VIEW

1:10

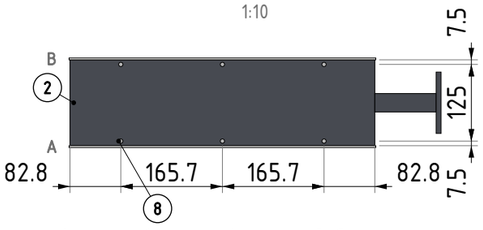

24 screws: 6 per side of band, into PVC edge

DETAIL B – SECTION TOP / BOTTOM 1:3

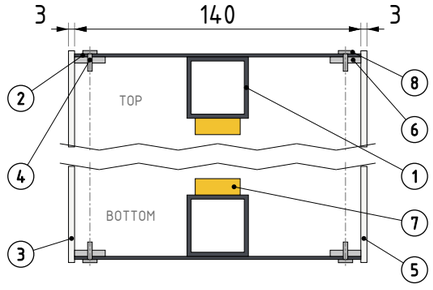

screws 8 (D3.2) through band into PVC edge; band welded to frame

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + legs □30x30x2, in body white	Alu EN AW-6060	RAL 7024 legs	2 x 595.5 + 2 x 434 = 2059 mm
1A	Flange 100x100x8, 4 x ⌀10	Alu, welded to leg	RAL 7024	2 pcs.
2	Body band 1.5 x 140, inside white	Alu, folded, welded to frame	RAL 7024 out	497 x 497: 1988 mm
3	Face A (glass)	3 mm opal white plexiglass	–	500 x 500 = 0.25 m²
4	PVC edge 3 x 15 (face A)	PVC, glued to face	white	1976 mm
5	Face B (glass, mirror)	3 mm opal white plexiglass	–	500 x 500 = 0.25 m²
6	PVC edge 3 x 15 (face B)	PVC, glued to face	white	1976 mm
7	LED Kaisen DUOLITE DS15 + PSU	PSU KPS-V12-36W67-RP	6500 K	12 pcs. (17.3 W) + 1 PSU
8	Tapping screw, D3.2 holes	A2	–	24 pcs. (into PVC edge)
9	Logo, sides A + B	ORACAL 551 702	black	2 pcs., 300 x 393 mm

MAIN DATA

Product	double-sided lightbox, projecting
Size (glass)	500 x 500 x 146 mm
Sides	A + B: logo 300 x 393 (9)
From wall	606.5 mm (body 108)
Fixing	2 flanges, 8 x ⌀10, 64 x 64
LED / PSU	12 x DUOLITE DS15, KPS-V12-36W67-RP
Finish	legs + plates RAL 7024; inside white
Cable	through bottom leg + flange:
Qty	1 pcs.
Weight (calc.)	≈ 4.8 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-12	

CLIENT

TITLE: DOUBLE-SIDED LIGHTBOX, WALL MOUNTED (PROJECTING)

ORDER NO.: **ALT0000_00.00_RS**


FILE / DRAWING NO.: Lightbox 500x500 double-sided, logo

SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:10 / 1:8	A3	1 / 2	A	

DRAWN	CHECKED	DATE
		2026-10-12

FRAME (1) – SIDE VIEW


1:8 (from side A, welded)

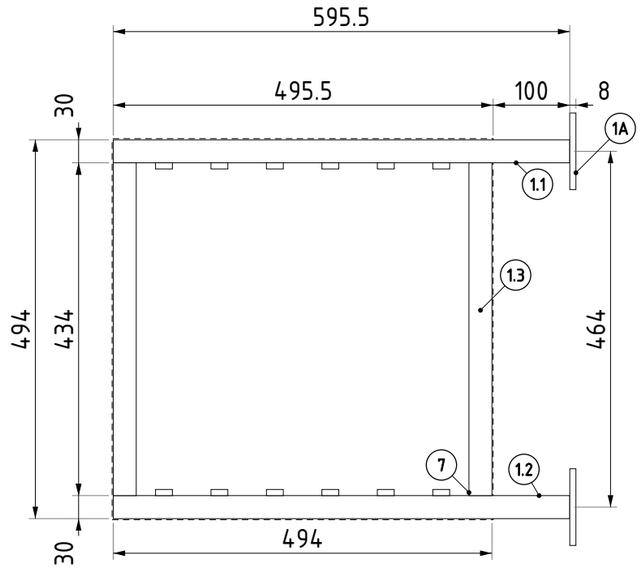

□30x30x2: 2059 mm, welded, ground
LED 12 pcs., 72.3 mm, light to both faces


FRAME – END VIEW (FROM WALL)

1:8 (mounting plate 1A)

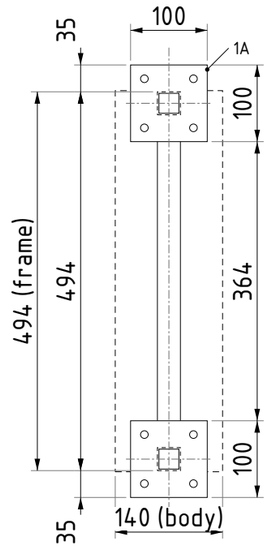


flanges t = 8, 8 x Ø10, welded to legs; cable through leg tube □26; holes – DETAIL

DETAIL – FLANGE 1A (2 pcs.)

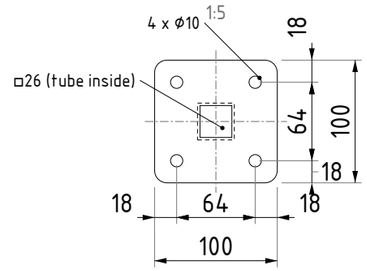

t = 8, R10, welded to leg □30x30x2



FRAME – ISOMETRIC

not to scale

LED (7)	
Module	Kaisen DUOLITE DS15
Power / flux	1.44 W, 140 lm, 12 V (assumed)
Beam	10° x 65° (for double-sided boxes)
Mounting	top + bottom members
Qty / pitch	12 pcs., 72.3 mm (table 80)
Kaisen table	box 1000x500, depth 140: 2200 lx
Power total	17.3 W
PSU	KPS-V12-36W67-RP (36 W), place:
Supply	not in Alt Reklama price list – check:

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member + leg □30x30x2	Alu EN AW-6060	RAL 7024 leg	1 x 595.5 mm
1.2	Bottom member + leg □30x30x2	Alu EN AW-6060	RAL 7024 leg	1 x 595.5 mm (cable)
1.3	Vertical □30x30x2	Alu EN AW-6060	white	2 x 434 mm
1A	Flange 100x100x8 R10	Alu	RAL 7024	2 pcs., 4 x Ø10 + □26
	Frame profile total			2059 mm (+ cut allowance)
7	LED Kaisen DUOLITE DS15	1.44 W, 12 V	6500 K	12 pcs.
7A	PSU	KPS-V12-36W67-5Y-RP	IP67	1 pc.
7B	Cable 2 x 0.75 (LED -> PSU)			length:

MAIN DATA	
Frame outer	494 x 494 mm
Profile	□30x30x2 Alu, centre of depth
Legs	top + bottom members, +100 out of body
Leg axes	464 mm (from glass edge 18)
Joints	welded (TIG), ground
Body	band 497 x 497, welded to frame
Cable	bottom leg tube -> flange □ hole
Finish	legs + plates RAL 7024; inside white
Qty	1 set

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-12	

CLIENT

TITLE
DOUBLE-SIDED LIGHTBOX, WALL MOUNTED (PROJECTING) – FRAME (CAD)

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	Lightbox 500x500 double-sided, logo			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:8 / 1:5	A3	2 / 2	A	
DRAWN	CHECKED	DATE		
		2026-10-12		