

FRONT VIEW – SIDE A

1:10

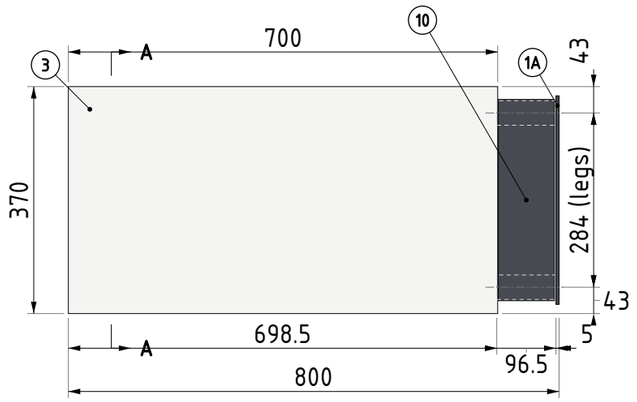

VIEW FROM WALL


1:10

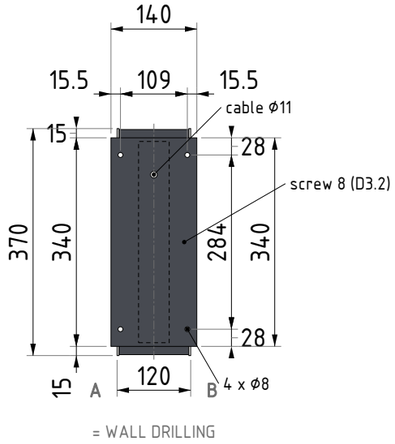

= WALL DRILLING


FRONT VIEW – SIDE B

1:10 (mirrored)

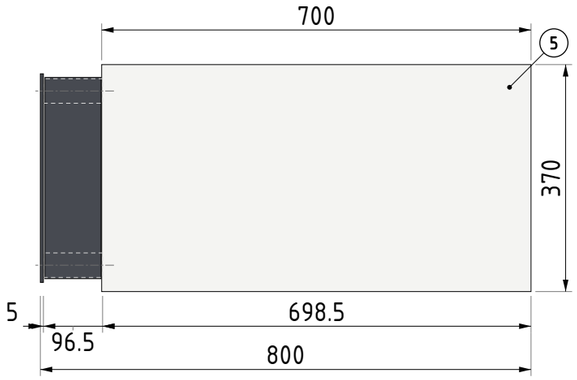


SECTION A-A


1:8

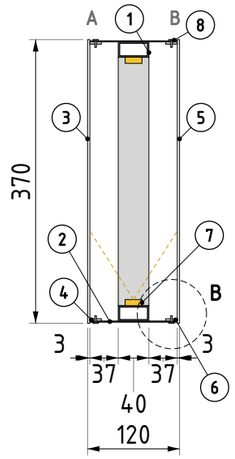

ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

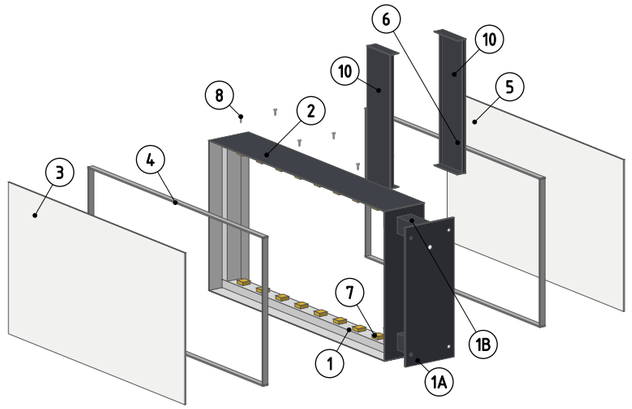

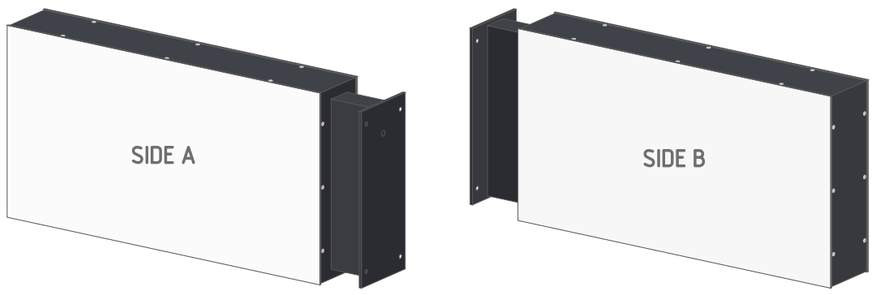

3D VIEW – SIDE A


ILLUSTRATIVE – NOT TO SCALE

3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE


TOP VIEW

1:10

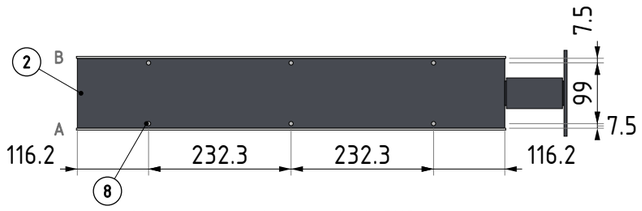

24 screws: 6 per side of band, into PVC edge

DETAIL B – SECTION TOP / BOTTOM 1:2.5

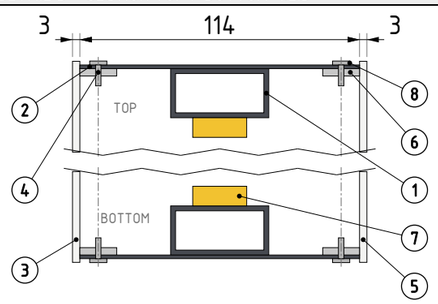

screws 8 (D3.2) through band into PVC edge; band welded to frame

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame 40x20x2 (cut list – sheet 2)	Alu EN AW-6060	white (inside)	2 x 694 + 1 x 324 = 1712 mm
1B	Legs □40x40x4, end 50°	Alu, welded to frame	RAL 7024	2 x 151 mm
1A	Mounting plate 140x340x5, 4 x ⌀8 + ⌀11	Alu, welded to legs	RAL 7024	1 pc.
1C	Trafo plate 1.5 mm (PSU)	Alu, welded between legs	–	244 x 40 mm
2	Body band 1.5 x 114, inside white	Alu, folded, welded to frame	RAL 7024 out	697 x 367: 2128 mm
3	Face A (glass)	3 mm opal white plexiglass	–	700 x 370 = 0.26 m²
4	PVC edge 3 x 15 (face A)	PVC, glued to face	white	2116 mm
5	Face B (glass, mirror)	3 mm opal white plexiglass	–	700 x 370 = 0.26 m²
6	PVC edge 3 x 15 (face B)	PVC, glued to face	white	2116 mm
7	LED Kaisen DUOLITE DS15 + PSU	PSU KPS-V12-36W67-RP	6500 K	16 pcs. (23.0 W) + 1 PSU
8	Tapping screw, D3.2 holes	A2	–	24 pcs. (into PVC edge)
10	Leg cover A + B, 2 x ⌀3.2 top (DXF)	Alu 2, ribs 10 notched	RAL 7024	2 pcs., 91.5 x 328 x 25

MAIN DATA

Product	double-sided lightbox, projecting
Size (glass)	700 x 370 x 120 mm
Sides	A + B (graphics per side)
From wall	800 mm (body 104.5)
Fixing	1 plate 140x340, 4 x ⌀8, 109 x 284
LED / PSU	16 x DUOLITE DS15, KPS-V12-36W67-RP
Finish	legs + plates RAL 7024; inside white
Cable	inside leg cover –> plate ⌀11
Qty	1 pcs.
Weight (calc.)	≈ 5.7 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-12	

CLIENT

TITLE: DOUBLE-SIDED LIGHTBOX, WALL MOUNTED (PROJECTING)

ORDER NO.: **ALT0000_00.00_RS**


FILE / DRAWING NO.: Lightbox 700x370 double-sided, low legs

SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:10 / 1:8	A3	1 / 2	A	

DRAWN	CHECKED	DATE
		2026-10-12

FRAME (1) – SIDE VIEW

1:5 (from side A, welded)

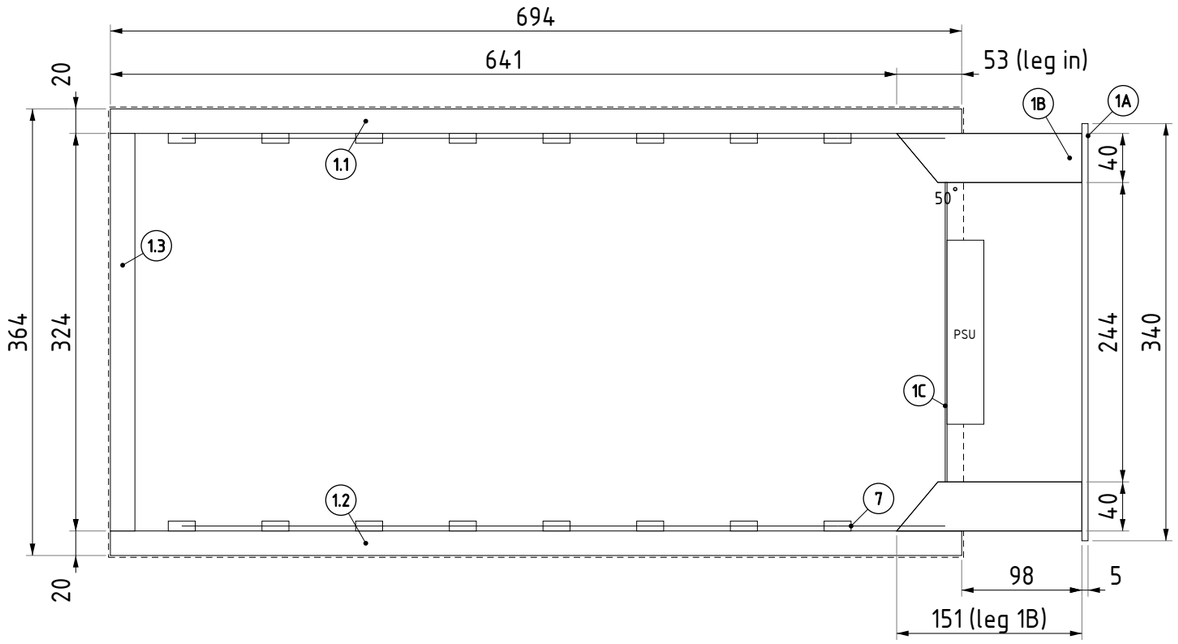

40x20x2: 1712 mm, welded, ground
LED 16 pcs., 76.4 mm, light to both faces

FRAME – END VIEW (FROM WALL)

1:5 (mounting plate 1A)


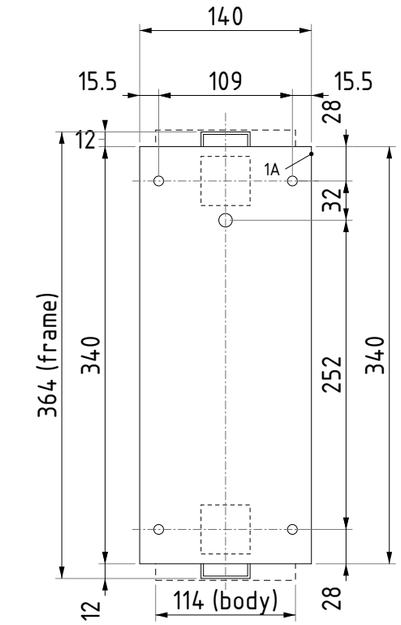


plate t = 5, 4 x ⌀8, welded to legs 1B (dashed); cable ⌀11 on axis

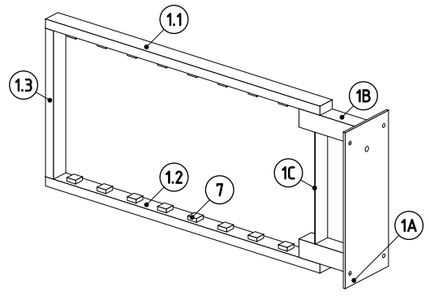

FRAME – ISOMETRIC

not to scale

LED (7)	
Module	Kaisen DUOLITE DS15
Power / flux	1.44 W, 140 lm, 12 V (assumed)
Beam	10° x 65° (for double-sided boxes)
Mounting	top + bottom members
Qty / pitch	16 pcs., 76.4 mm (table 80)
Kaisen table	box 1000x500, depth 100: 2300 lx
Power total	23.0 W
PSU	KPS-V12-36W67-RP (36 W), place:
Supply	not in Alt Reklama price list – check:

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member 40x20x2	Alu EN AW-6060	white	1 x 694 mm
1.2	Bottom member 40x20x2	Alu EN AW-6060	white	1 x 694 mm
1.3	Front vertical 40x20x2	Alu EN AW-6060	white	1 x 324 mm
1B	Leg □40x40x4, end 50°	Alu EN AW-6060	RAL 7024	2 x 151 mm
1A	Mounting plate 140x340x5	Alu	RAL 7024	1 pc., 4 x ⌀8 + ⌀11
1C	Trafo plate 1.5 mm	Alu	–	244 x 40 mm
7	LED Kaisen DUOLITE DS15	1.44 W, 12 V	6500 K	16 pcs.
7A	PSU (on 1C)	KPS-V12-36W67-5Y-RP	IP67	1 pc.
7B	Cable 2 x 0.75 (LED -> PSU)			length:

MAIN DATA	
Frame outer	694 x 364 mm
Profile	40x20x2 Alu, centre of depth
Legs	□40x40x4 under members, in 53, out 96.5
Leg axes	284 mm (from glass edge 43)
Joints	welded (TIG), ground
Body	band 697 x 367, welded to frame
Cable	PSU on 1C -> inside cover -> plate ⌀11
Finish	legs + plates RAL 7024; inside white
Qty	1 set

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-12	

CLIENT

TITLE
DOUBLE-SIDED LIGHTBOX, WALL MOUNTED (PROJECTING) – FRAME (CAD)

ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	Lightbox 700x370 double-sided, low legs

SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:5	A3	2 / 2	A	

DRAWN	CHECKED	DATE
		2026-10-12