

FRONT VIEW – SIDE A

1:12

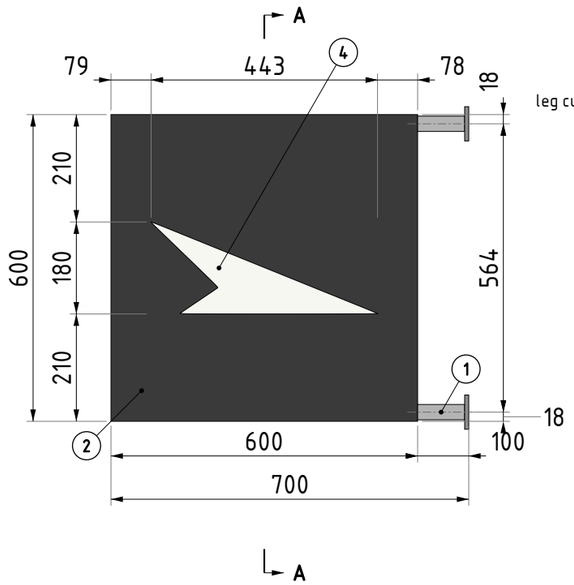

VIEW FROM WALL


1:12

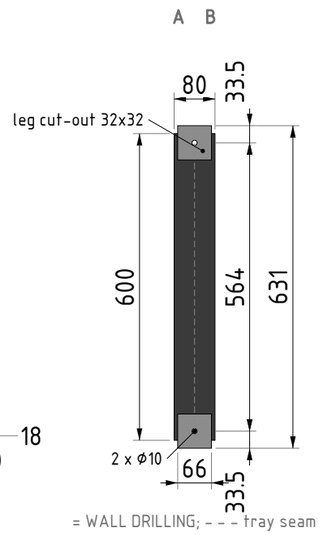

= WALL DRILLING; – – – tray seam


FRONT VIEW – SIDE B

1:12 (mirrored)

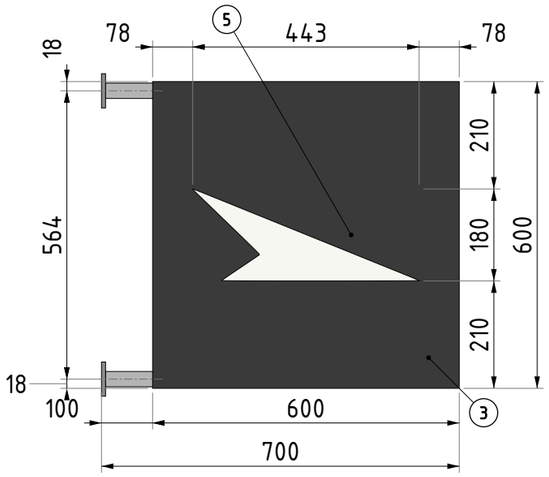


SECTION A-A

1:8

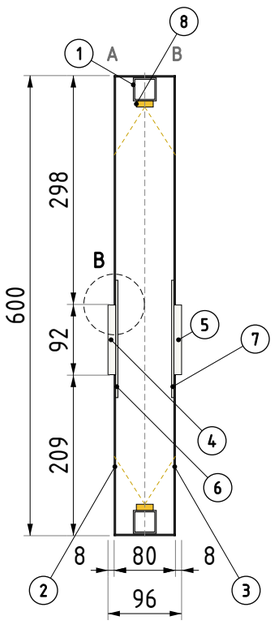

FRAME (1) + LED (8)


1:12 (from side A)

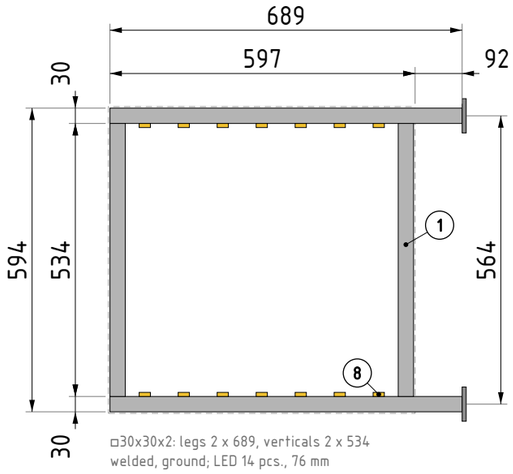

□30x30x2: legs 2 x 689, verticals 2 x 534
welded, ground; LED 14 pcs., 76 mm

PLATE 1A


1:4




t = 8, ⌀10, welded to leg (2 pcs.), hole centred

ASSEMBLY – EXPLODED VIEW


not to scale; tray A – insert 4 – base 6 + nuts – frame + LED – base 7 – insert 5 – tray B

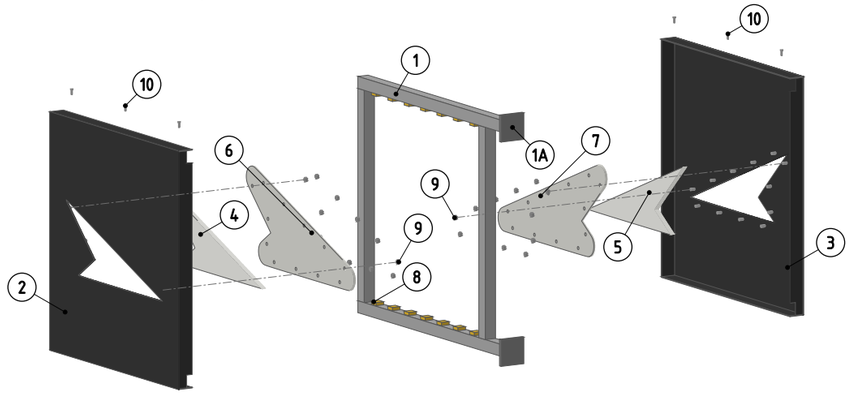



3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE




3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE


TOP VIEW

1:12

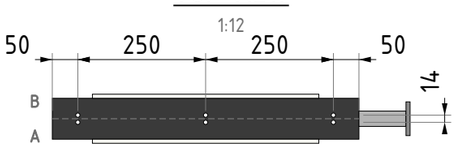

screws 10: 12 pcs. ⌀3.2, top + bottom flanges, 7 from seam

DETAIL B – CUT-OUT EDGE 1.5:1



gap 0.7; insert 10 GLUED to base 6
stud welded (D6 mark); B = mirror

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + legs □30x30x2	Alu, welded		2 x 689 + 2 x 534 mm
1A	Mounting plate 66x67x8, ⌀10	Alu, welded to leg		2 pcs.
2	Front A, folded 600x600x40 (DXF)	Alu 2 mm		1 pc.
3	Back B, folded 600x600x40 (DXF)	Alu 2 mm		1 pc.
4	Insert A 10 mm, GLUED to base	Plexi opal white	–	1 pc. 0.027 m²
5	Insert B 10 mm, GLUED to base	Plexi opal white	–	1 pc. 0.027 m²
6	Base A 3 mm, 12 x ⌀8 (DXF)	Plexi opal white	–	1 pc. 0.064 m²
7	Base B 3 mm, 12 x ⌀8 (DXF)	Plexi opal white	–	1 pc. 0.064 m²
8	LED Kaisen DUOLITE DS15	PSU KPS-V12-36W67-RP	6500 K	14 pcs. (20.2 W)
9	Stud (welded to Alu) + nut		–	24 pcs.
10	Screw, ⌀3.2 holes in flanges	A2	–	12 pcs.

MAIN DATA

Product	P10 lightbox, 2-sided
Size	600 x 600 x 80 (+ 2 x 8)
From wall	100 mm (legs 92 + plate 8)
Body	Alu 2, 2 folded trays A + B, seam centre
Glass	3+10 mm, cut-out + 0.7
Frame	□30x30x2
LED / PSU	14 x DUOLITE DS15, KPS-V12-36W67-RP
Qty	
Weight (calc.)	≈ 7.4 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT

TEST

TITLE

P10_lightbox 600x600x80 – push-through (etalon)

ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	TEST P10_lightbox

SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:2 / 1:1	A3	1 / 1	A	

DRAWN	CHECKED	DATE
		2026-10-13