

FRONT VIEW – SIDE A

1:10

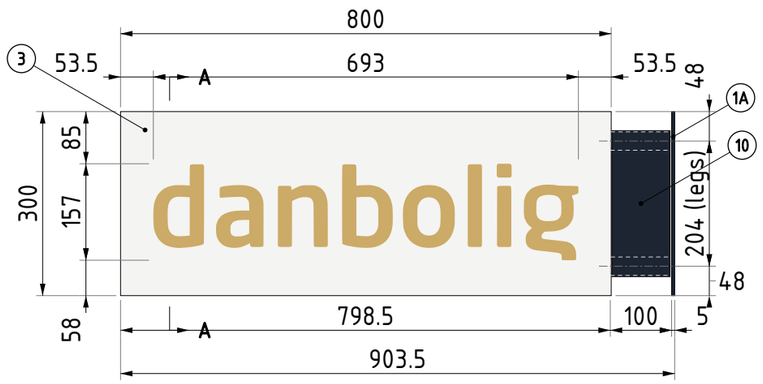

VIEW FROM WALL

1:10

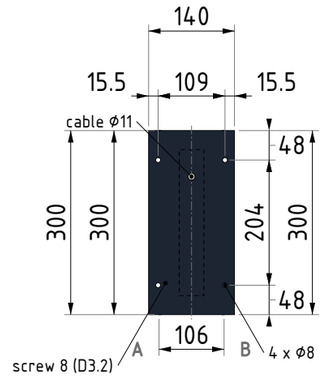


= WALL DRILLING

CABLE EXIT: ~230 V cable 1.5 m through plate Ø11 into wall, on axis, 75 mm from top of sign. PSU on plate, under leg covers.


FRONT VIEW – SIDE B

1:10 (mirrored)

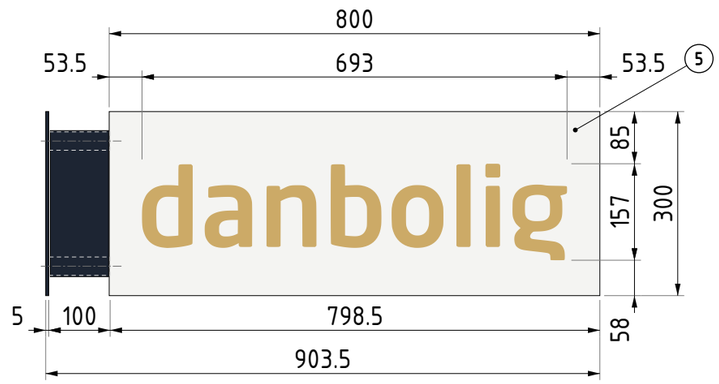

SECTION A–A


1:8

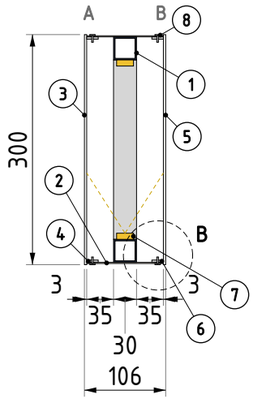

TOP VIEW


1:10

20 screws: 6 per side of band, into PVC edge



3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE




3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE

ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

DETAIL B – SECTION TOP / BOTTOM 1:2.5

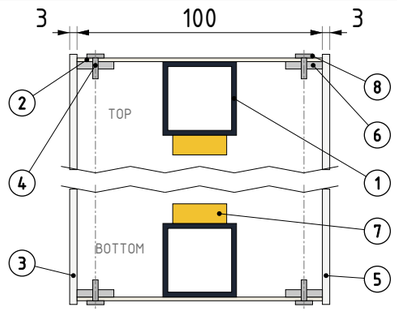

screws 8 (D3.2) through band into PVC edge; band welded to frame

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame □30x30x2 (cut list – sheet 2)	Alu EN AW-6060	white (inside)	2 x 794 + 234 + 174 = 1996 mm
1B	Legs □30x30x2, through rear vert.	Alu, welded to frame	NCS S 8010-R90B	2 x 132 mm
1A	Mounting plate 140x300x5, 4 x Ø8 + Ø11	Alu, welded to legs	NCS S 8010-R90B	1 pc.
2	Body band 1.5 x 100, inside white	Alu, folded, welded to frame	RAL 9010 out	797 x 297: 2188 mm
3	Face A (glass)	3 mm opal white plexiglass	–	800 x 300 = 0.24 m²
4	PVC edge 3 x 15 (face A)	PVC, glued to face	white	2176 mm
5	Face B (glass, mirror)	3 mm opal white plexiglass	–	800 x 300 = 0.24 m²
6	PVC edge 3 x 15 (face B)	PVC, glued to face	white	2176 mm
7	LED Kaisen DUOLITE DS15 + PSU (on 1A)	PSU KPS-V12-40W67-RM	6500 K	20 pcs. (28.8 W) + 1 PSU
8	Tapping screw, D3.2 holes	A2	–	20 pcs. (into PVC edge)
9	Logo, sides A + B	3M 100-54 gold	Pantone 872C	2 pcs., 693 x 157 mm
10	Leg cover A + B, 2 x Ø3.2 top (DXF)	Alu 2, ribs 10 notched	NCS S 8010-R90B	2 pcs., 95 x 238 x 20

MAIN DATA

Product	double-sided lightbox, projecting
Size (glass)	800 x 300 x 106 mm
Sides	A + B: logo 693 x 157 (9)
From wall	903.5 mm (body 108)
Fixing	1 plate 140x300, 4 x Ø8, 109 x 204
LED / PSU	20 x DUOLITE DS15, KPS-V12-40W67-RM
Finish	legs + plates NCS S 8010-R90B
Cable	~230V 1.5 m via plate Ø11
Qty	1 pcs.
Weight (calc.)	≈ 5.1 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT

BN Skilte A/S / danbolig Hornbæk

TITLE

DB-0001 DOUBLE-SIDED LIGHTBOX 800 x 300, PROJECTING


ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	PO 3295 / DB-0001

SCALE (DIM. mm)	FORMAT	REV.	PROJECTION
1:10 / 1:8	A3	A	

DATE		
2026-10-15	1 pcs.	Sheet 1 / 3

FRAME (1) – SIDE VIEW

1:4 (from side A, welded)

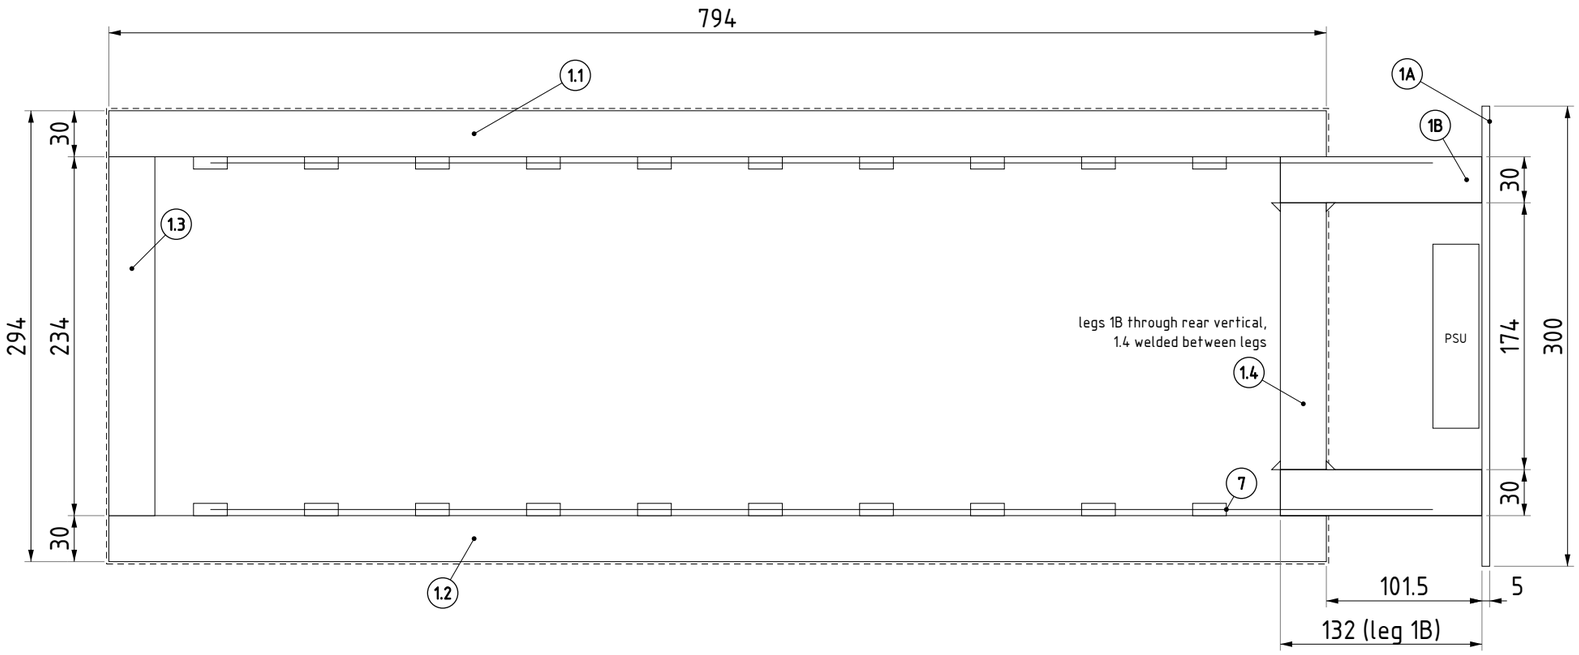

FRAME – END VIEW (FROM WALL)

1:4 (mounting plate 1A)


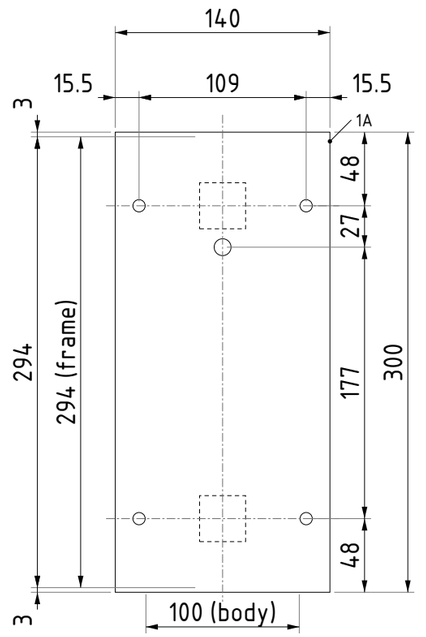


plate t = 5, 4 x ⌀8, welded to legs 1B (dashed); cable ⌀11 on axis

□30x30x2: 1996 mm, welded, ground
LED 20 pcs., 72.4 mm, light to both faces

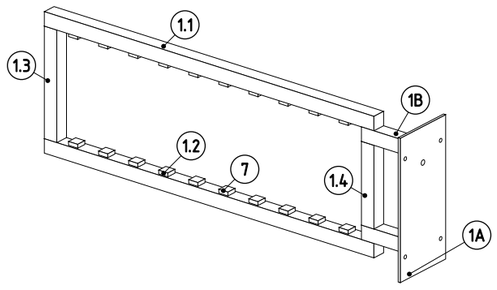

FRAME – ISOMETRIC

not to scale

LED (7)	
Module	Kaisen DUOLITE DS15
Power / flux	1.44 W, 140 lm, 12 V (assumed)
Beam	10° x 65° (for double-sided boxes)
Mounting	top + bottom members
Qty / pitch	20 pcs., 72.4 mm (table 80)
Kaisen table	box 1000x500, depth 100: 2300 lx
Power total	28.8 W
PSU	KPS-V12-40W67-RM (40 W), on plate 1A
Supply	not in Alt Reklama price list – check:

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member □30x30x2	Alu EN AW-6060	white	1 x 794 mm
1.2	Bottom member □30x30x2	Alu EN AW-6060	white	1 x 794 mm
1.3	Front vertical □30x30x2	Alu EN AW-6060	white	1 x 234 mm
1.4	Rear vertical □30x30x2, between legs	Alu EN AW-6060	white	1 x 174 mm
1B	Leg □30x30x2, through rear vert.	Alu EN AW-6060	NCS S 8010-R90B	2 x 132 mm
1A	Mounting plate 140x300x5	Alu	NCS S 8010-R90B	1 pc., 4 x ⌀8 + ⌀11
7	LED Kaisen DUOLITE DS15	1.44 W, 12 V	6500 K	20 pcs.
7A	PSU on plate 1A, under covers	KPS-V12-40W67-5Y-RM	IP67	1 pc.
7B	Cable ~230 V from PSU, out via plate			1.5 m

MAIN DATA	
Frame outer	794 x 294 mm
Profile	□30x30x2 Alu, centre of depth
Legs	□30x30x2 through rear vert., gap 100
Leg axes	204 mm (from glass edge 48)
Joints	welded (TIG), ground
Body	band 797 x 297, welded to frame
Cable	~230V 1.5 m: PSU on 1A -> ⌀11
Finish	legs + plates NCS S 8010-R90B
Qty	1 set

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT
BN Skilte A/S / danbolig Hornbæk

TITLE
DB-0001 DOUBLE-SIDED LIGHTBOX 800 x 300, PROJECTING – FRAME (CAD)

ORDER NO.
ALT0000_00.00_RS

FILE / DRAWING NO.
PO 3295 / DB-0001

SCALE (DIM. mm)
1:4 / 1:4

FORMAT
A3


REV. A

PROJECTION


DATE
2026-10-15

1 pcs.

Sheet 2 / 3

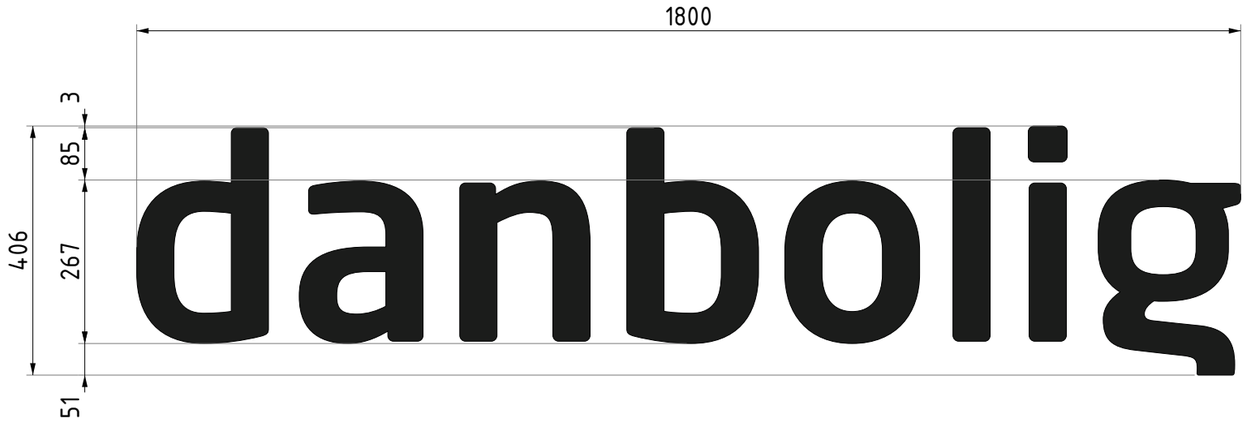


FRONT VIEW
SCALE 1:10



SIDE VIEW (RIGHT)
SCALE 1:10

Power / PSU / cable exits:

– – – 12V cable 1.5 m from each letter, exits on one line (9 pcs., small parts – exit in the part)

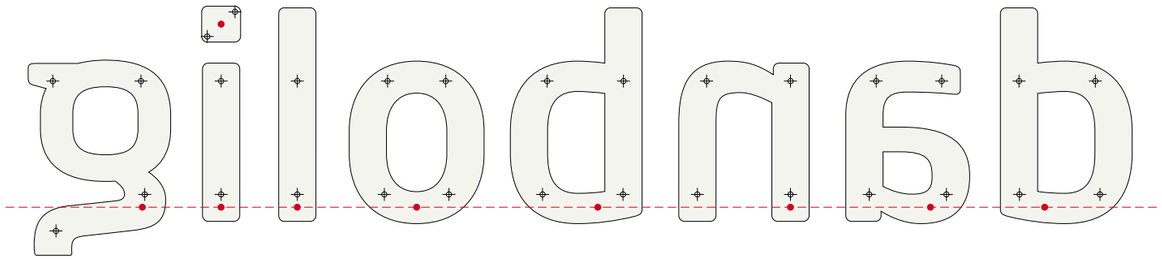


REAR VIEW (MIRRORED)
SCALE 1:10 | true view from the back

FRONT PAINTED IN 2 LAYERS:
1st layer WHITE (base), 2nd layer BLACK (top coat); gold leaf – by client



3D VIEW
ILLUSTRATIVE – NOT TO SCALE

PROFILE P10 – THREADED RODS TO FACADE



Alu 1.5 back recessed (rim 5); LED groove 8 x ; rod M

BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter block (LED groove from back, DXF)	Acrylic 30 mm white (opal)	front white+black	10.12 m / 0.27 m²
2	LED strip in groove	LED 12V	–	
3	Letter back (recessed into block)	Alu 1.5 mm	–	0.27 m²
4	Threaded rod welded to back –> facade	M? (?)	–	30 pcs.
5	Paper mounting template 1:1	paper	–	1 pc.
6	Trafo box	12V	–	1 pc.

MAIN DATA

Quantity	1 pcs.
Overall size	1800 x 406
Profile	P10 block letters 30 mm
Depth	30
Front	painted white, then black
Gold leaf	by client (BN)
Sides	unpainted, illuminated
Illumination	LED 12V
Power	12V per letter + trafo box
Fixing	threaded rods + paper template
Mounting	separate letters, no frame
Weight (calc.)	≈ 11 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT: BN Skilte A/S / danbolig Hornbæk

TITLE: DB-0002 danbolig 1800 x 352 – P10 letters, threaded rods to facade

ORDER NO.: ALT0000_00.00_RS

FILE / DRAWING NO.: PO 3295 / DB-0002

SCALE (DIM. mm): 1:10 / 1:10

FORMAT: A3

REV. A

PROJECTION

DATE: 2026-10-15

1 pcs.

Sheet 3 / 3