

## FRONT VIEW – SIDE A

1:20

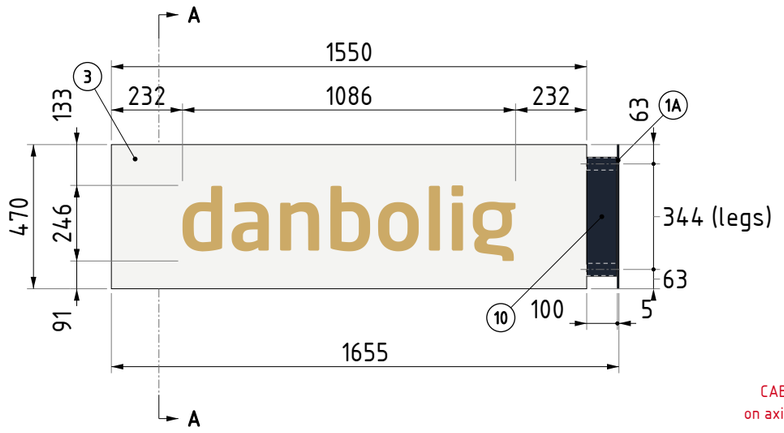


## VIEW FROM WALL

1:20





= WALL DRILLING

CABLE EXIT: ~230 V cable 1.5 m through plate Ø11 into wall, on axis, 95 mm from top of sign. PSU on plate, under leg covers.


## FRONT VIEW – SIDE B

1:20 (mirrored)

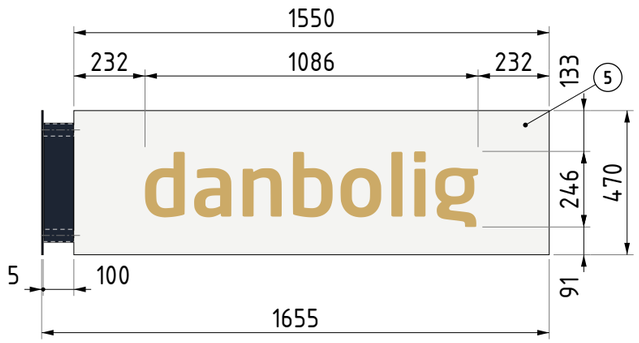



## SECTION A–A

1:15




## TOP VIEW


1:20

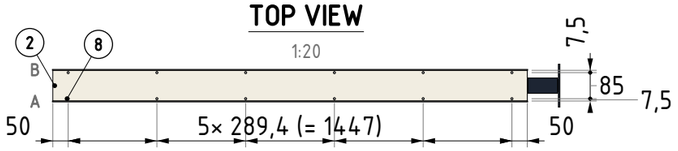



32 screws: 12 per side of band, into PVC edge

## ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

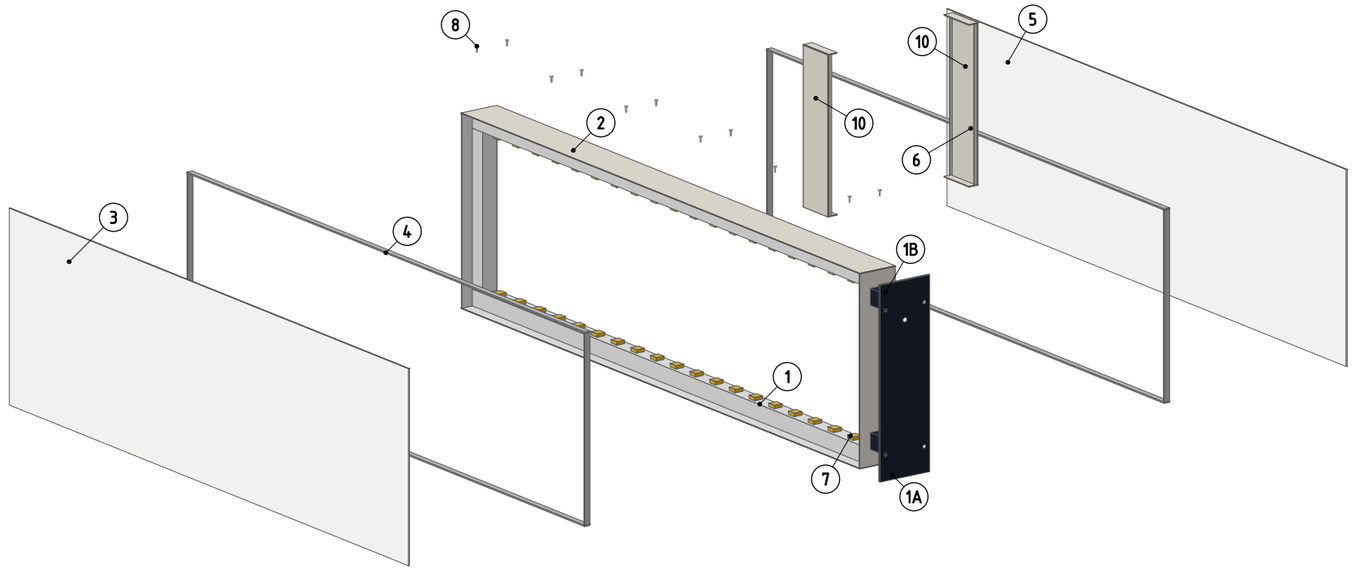

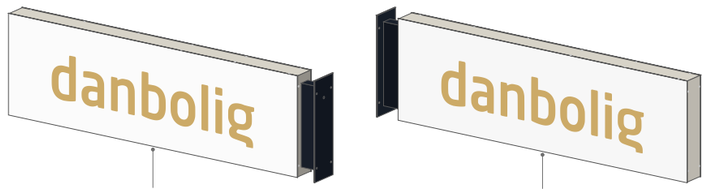




## 3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE

## 3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE

### DETAIL B – SECTION TOP / BOTTOM 1:3

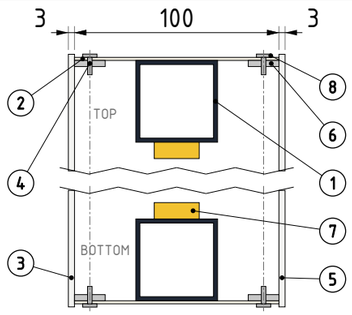


screws 8 (D3.2) through band into PVC edge; band welded to frame

### BILL OF MATERIALS

| POS | PART | MATERIAL | FINISH | QTY (PERIMETER / AREA) |
|---|---|---|---|---|
| 1 | Frame □40x40x2 (cut list – sheet 2) | Alu EN AW-6060 | white (inside) | 2 x 1544 + 384 + 304 = 3776 mm |
| 1B | Legs □40x40x2, through rear vert. | Alu, welded to frame | NCS S 8010-R90B | 2 x 143 mm |
| 1A | Mounting plate 140x470x5, 4 x Ø8 + Ø11 | Alu, welded to legs | NCS S 8010-R90B | 1 pc. |
| 2 | Body band 1.5 x 100, inside white | Alu, folded, welded to frame | RAL 9010 out | 1547 x 467: 4028 mm |
| 3 | Face A (glass) | 3 mm opal white plexiglass | – | 1550 x 470 = 0.73 m² |
| 4 | PVC edge 3 x 15 (face A) | PVC, glued to face | white | 4016 mm |
| 5 | Face B (glass, mirror) | 3 mm opal white plexiglass | – | 1550 x 470 = 0.73 m² |
| 6 | PVC edge 3 x 15 (face B) | PVC, glued to face | white | 4016 mm |
| 7 | LED + PSU (on 1A) | LED / PSU | – | 38 pcs. + 1 PSU |
| 8 | Tapping screw, D3.2 holes | A2 | – | 32 pcs. (into PVC edge) |
| 9 | Logo, sides A + B | 3M 100-54 | – | 2 pcs., 1086 x 246 mm |
| 10 | Leg cover A + B, 2 x Ø3.2 top (DXF) | Alu 2, ribs 10 notched | NCS S 8010-R90B | 2 pcs., 96.5 x 388 x 25 |

### MAIN DATA

| | |
|---|---|
| Product | double-sided lightbox, projecting |
| Size (glass) | 1550 x 470 x 106 mm |
| Sides | A + B: logo 1086 x 246 (9) |
| From wall | 1655 mm (body 109.5) |
| Fixing | 1 plate 140x470, 4 x Ø8, 109 x 344 |
| LED / PSU | 38 x LED, PSU |
| Finish | legs + plates NCS S 8010-R90B |
| Cable | ~230V 1.5 m via plate Ø11 |
| Qty | 1 pcs. |
| Weight (calc.) | ≈ 12.1 kg / pcs, excl. PSU |

### REVISIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First issue | 2026-10-15 | |

CLIENT

BN Skilte A/S / danbolig Hornbæk

TITLE

DB-0001 DOUBLE-SIDED LIGHTBOX 1550 x 470, PROJECTING


| ORDER NO. | FILE / DRAWING NO. |
|---|---|
| ALT0000_00.00_RS | PO 3295 / DB-0001 |

| SCALE | FORMAT | REV. | PROJECTION |
|---|---|---|---|
| 1:20 / 1:15 | A3 | A | |

| DATE | | |
|---|---|---|
| 2026-10-15 | 1 pcs. | Sheet 1 / 3 |

## FRAME (1) – SIDE VIEW

1:8 (from side A, welded)

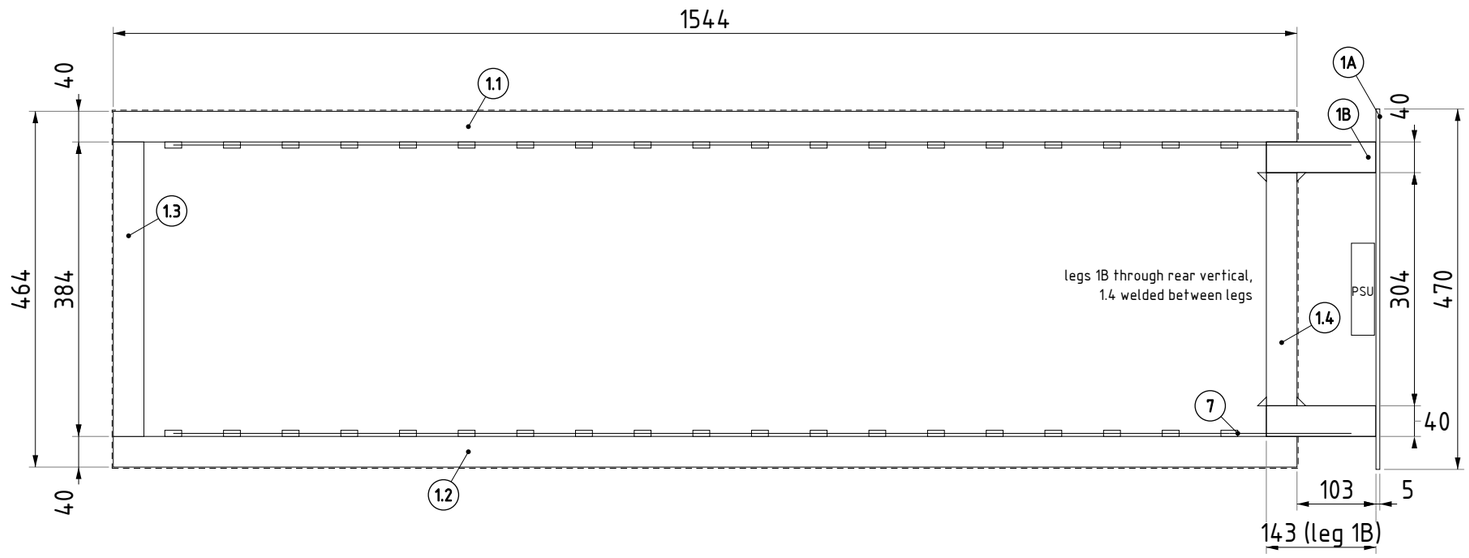


□40x40x2: 3776 mm, welded, ground
LED 38 pcs., 76.5 mm, light to both faces

## FRAME – END VIEW (FROM WALL)

1:8 (mounting plate 1A)


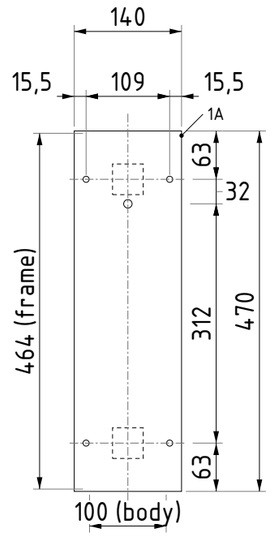



plate t = 5, 4 x ⌀8, welded to legs 1B (dashed); cable ⌀11 on axis

## FRAME – ISOMETRIC

not to scale

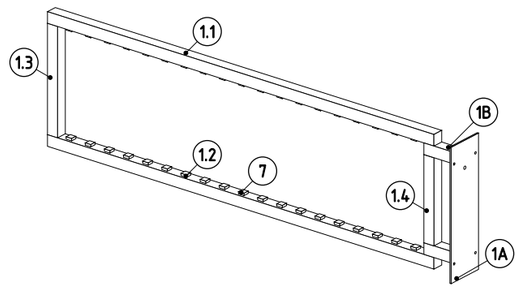


| LED (7) | |
|---|---|
| Module | LED |
| Mounting | top + bottom members |
| Qty / pitch | 38 pcs., 76.5 mm |
| PSU | PSU, on plate 1A under covers |

**BILL OF MATERIALS**

| POS | PART | MATERIAL | FINISH | QTY (PERIMETER / AREA) |
|---|---|---|---|---|
| 1.1 | Top member □40x40x2 | Alu EN AW-6060 | white | 1 x 1544 mm |
| 1.2 | Bottom member □40x40x2 | Alu EN AW-6060 | white | 1 x 1544 mm |
| 1.3 | Front vertical □40x40x2 | Alu EN AW-6060 | white | 1 x 384 mm |
| 1.4 | Rear vertical □40x40x2, between legs | Alu EN AW-6060 | white | 1 x 304 mm |
| 1B | Leg □40x40x2, through rear vert. | Alu EN AW-6060 | NCS S 8010-R90B | 2 x 143 mm |
| 1A | Mounting plate 140x470x5 | Alu | NCS S 8010-R90B | 1 pc., 4 x ⌀8 + ⌀11 |
| 7 | LED | LED | - | 38 pcs. |
| 7A | PSU on plate 1A, under covers | PSU | - | 1 pc. |
| 7B | Cable ~230 V from PSU, out via plate | | | 1.5 m |

| MAIN DATA | |
|---|---|
| Frame outer | 1544 x 464 mm |
| Profile | □40x40x2 Alu, centre of depth |
| Legs | □40x40x2 through rear vert., gap 101.5 |
| Leg axes | 344 mm (from glass edge 63) |
| Joints | welded (TIG), ground |
| Body | band 1547 x 467, welded to frame |
| Cable | ~230V 1.5 m: PSU on 1A -> ⌀11 |
| Finish | legs + plates NCS S 8010-R90B |
| Qty | 1 set |

**REVISIONS** — ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First issue | 2026-10-15 | |

CLIENT: BN Skilte A/S / danbolig Hornbæk

TITLE: DB-0001 DOUBLE-SIDED LIGHTBOX 1550 x 470, PROJECTING – FRAME (CAD)

ORDER NO.: **ALT0000_00.00_RS**


FILE / DRAWING NO.: PO 3295 / DB-0001

SCALE: 1:8 / 1:8 | FORMAT: A3 | REV. A | PROJECTION

DATE: 2026-10-15 | 1 pcs. | Sheet 2 / 3





## FRONT VIEW
SCALE 1:10




## SIDE VIEW (RIGHT)
SCALE 1:10

Power / PSU / cable exits:

– – – 12V cable 1.5 m from each letter, exits on one line (9 pcs., small parts – exit in the part)

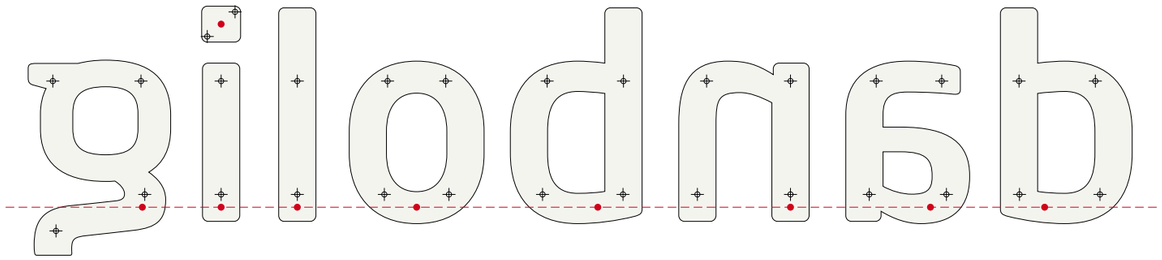



## REAR VIEW (MIRRORED)
SCALE 1:10 | true view from the back

FRONT PAINTED IN 2 LAYERS:
1st layer WHITE (base), 2nd layer BLACK (top coat); gold leaf – by client




## 3D VIEW
ILLUSTRATIVE – NOT TO SCALE

### PROFILE P10 – THREADED RODS TO FACADE




Alu 1.5 back recessed (rim 5); LED groove 8 x ; rod M

### BILL OF MATERIALS (per 1 pcs.)

| POS | PART | MATERIAL | FINISH | QTY (PERIMETER / AREA) |
|---|---|---|---|---|
| 1 | Letter block (LED groove from back, DXF) | Acrylic 30 mm white (opal) | front white+black | 10.12 m / 0.27 m² |
| 2 | LED strip in groove | LED 12V | – | |
| 3 | Letter back (recessed into block) | Alu 1.5 mm | – | 0.27 m² |
| 4 | Threaded rod welded to back –> facade | M? (?) | – | 30 pcs. |
| 5 | Paper mounting template 1:1 | paper | – | 1 pc. |
| 6 | Trafo box | 12V | – | 1 pc. |

### MAIN DATA

| | |
|---|---|
| Quantity | 1 pcs. |
| Overall size | 1800 x 406 |
| Profile | P10 block letters 30 mm |
| Depth | 30 |
| Front | painted white, then black |
| Gold leaf | by client (BN) |
| Sides | unpainted, illuminated |
| Illumination | LED 12V |
| Power | 12V per letter + trafo box |
| Fixing | threaded rods + paper template |
| Mounting | separate letters, no frame |
| Weight (calc.) | ≈ 11 kg / pcs, excl. PSU |

### REVISIONS
ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First issue | 2026-10-15 | |

CLIENT
BN Skilte A/S / danbolig Hornbæk

TITLE
DB-0002 danbolig 1800 x 352 – P10 letters, threaded rods to facade

ORDER NO.
ALT0000_00.00_RS

FILE / DRAWING NO.
PO 3295 / DB-0002

SCALE
1:10 / 1:10

FORMAT
A3

REV. A

PROJECTION

DATE
2026-10-15

1 pcs.

Sheet 3 / 3