

## FRONT VIEW – SIDE A

1:20

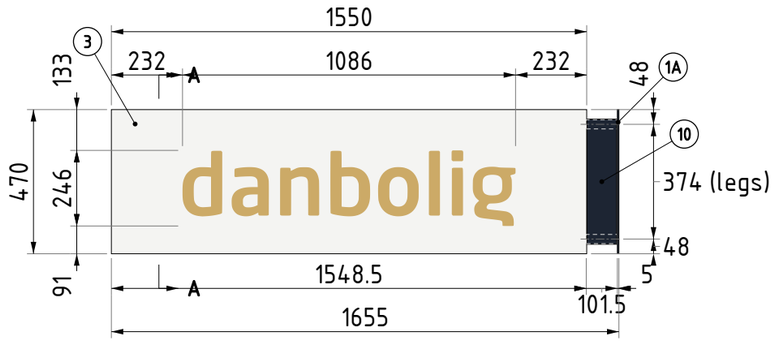


## VIEW FROM WALL

1:20





= WALL DRILLING

CABLE EXIT: ~230 V cable 1.5 m through plate Ø11 into wall, on axis, 75 mm from top of sign. PSU on plate, under leg covers.


## FRONT VIEW – SIDE B

1:20 (mirrored)

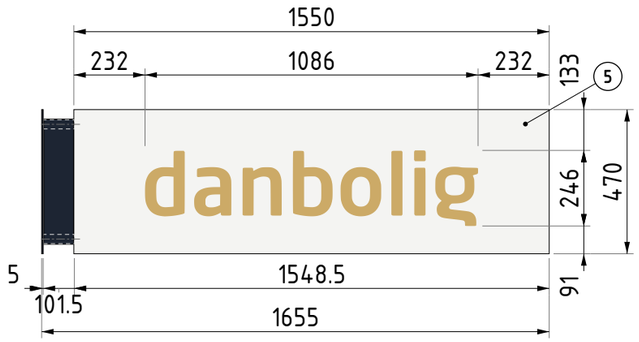



## SECTION A–A

1:15

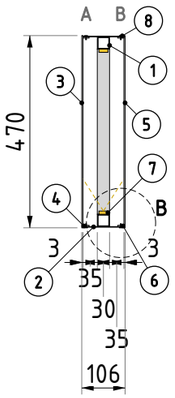


## TOP VIEW


1:20

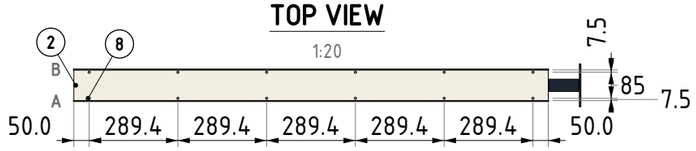



32 screws: 12 per side of band, into PVC edge

## ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

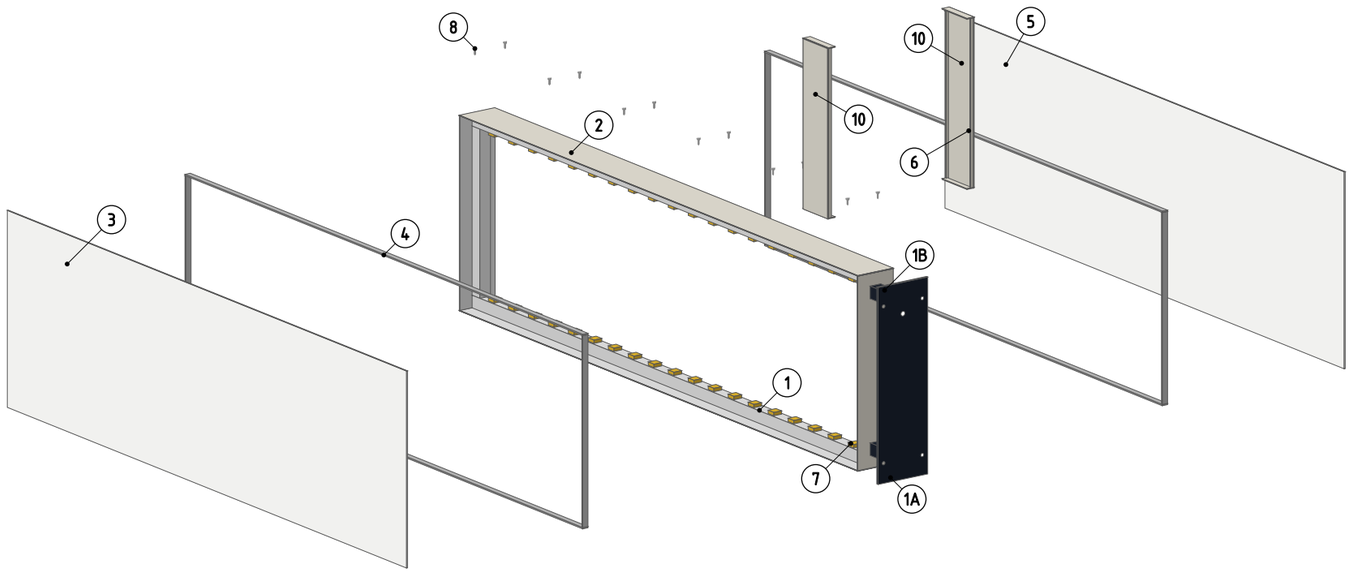

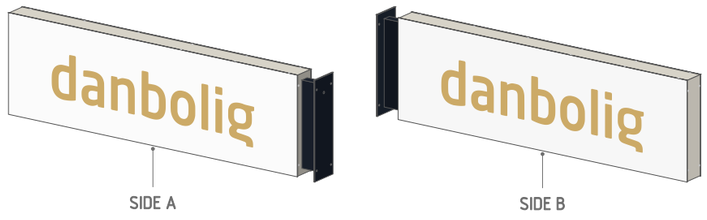
## 3D VIEW – SIDE A


ILLUSTRATIVE – NOT TO SCALE




## 3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE

### DETAIL B – SECTION TOP / BOTTOM 1:2.5

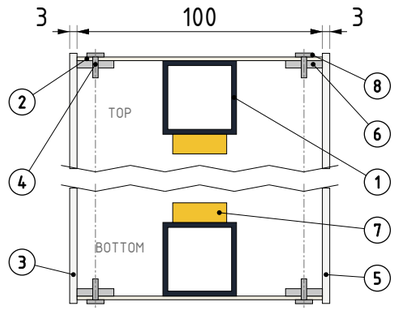


screws 8 (D3.2) through band into PVC edge; band welded to frame

### BILL OF MATERIALS

| POS | PART | MATERIAL | FINISH | QTY (PERIMETER / AREA) |
|---|---|---|---|---|
| 1 | Frame □30x30x2 (cut list – sheet 2) | Alu EN AW-6060 | white (inside) | 2 x 1544 + 404 + 344 = 3836 mm |
| 1B | Legs □30x30x2, through rear vert. | Alu, welded to frame | NCS S 8010-R90B | 2 x 133 mm |
| 1A | Mounting plate 140x470x5, 4 x Ø8 + Ø11 | Alu, welded to legs | NCS S 8010-R90B | 1 pc. |
| 2 | Body band 1.5 x 100, inside white | Alu, folded, welded to frame | RAL 9010 out | 1547 x 467: 4028 mm |
| 3 | Face A (glass) | 3 mm opal white plexiglass | – | 1550 x 470 = 0.73 m² |
| 4 | PVC edge 3 x 15 (face A) | PVC, glued to face | white | 4016 mm |
| 5 | Face B (glass, mirror) | 3 mm opal white plexiglass | – | 1550 x 470 = 0.73 m² |
| 6 | PVC edge 3 x 15 (face B) | PVC, glued to face | white | 4016 mm |
| 7 | LED + PSU (on 1A) | LED / PSU | – | 38 pcs. + 1 PSU |
| 8 | Tapping screw, D3.2 holes | A2 | – | 32 pcs. (into PVC edge) |
| 9 | Logo, sides A + B | 3M 100-54 | – | 2 pcs., 1086 x 246 mm |
| 10 | Leg cover A + B, 2 x Ø3.2 top (DXF) | Alu 2, ribs 10 notched | NCS S 8010-R90B | 2 pcs., 96.5 x 408 x 20 |

### MAIN DATA

| | |
|---|---|
| Product | double-sided lightbox, projecting |
| Size (glass) | 1550 x 470 x 106 mm |
| Sides | A + B: logo 1086 x 246 (9) |
| From wall | 1655 mm (body 109.5) |
| Fixing | 1 plate 140x470, 4 x Ø8, 109 x 374 |
| LED / PSU | 38 x LED, PSU |
| Finish | legs + plates NCS S 8010-R90B |
| Cable | ~230V 1.5 m via plate Ø11 |
| Qty | 1 pcs. |
| Weight (calc.) | ≈ 11.3 kg / pcs, excl. PSU |

### REVISIONS

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First issue | 2026-10-15 | |

CLIENT

BN Skilte A/S / danbolig Hornbæk

TITLE

DB-0001 DOUBLE-SIDED LIGHTBOX 1550 x 470, PROJECTING


| ORDER NO. | FILE / DRAWING NO. |
|---|---|
| ALT0000_00.00_RS | PO 3295 / DB-0001 |

| SCALE (DIM. mm) | FORMAT | REV. | PROJECTION |
|---|---|---|---|
| 1:20 / 1:15 | A3 | A | |

| DATE | | |
|---|---|---|
| 2026-10-15 | 1 pcs. | Sheet 1 / 3 |

## FRAME (1) – SIDE VIEW

1:8 (from side A, welded)

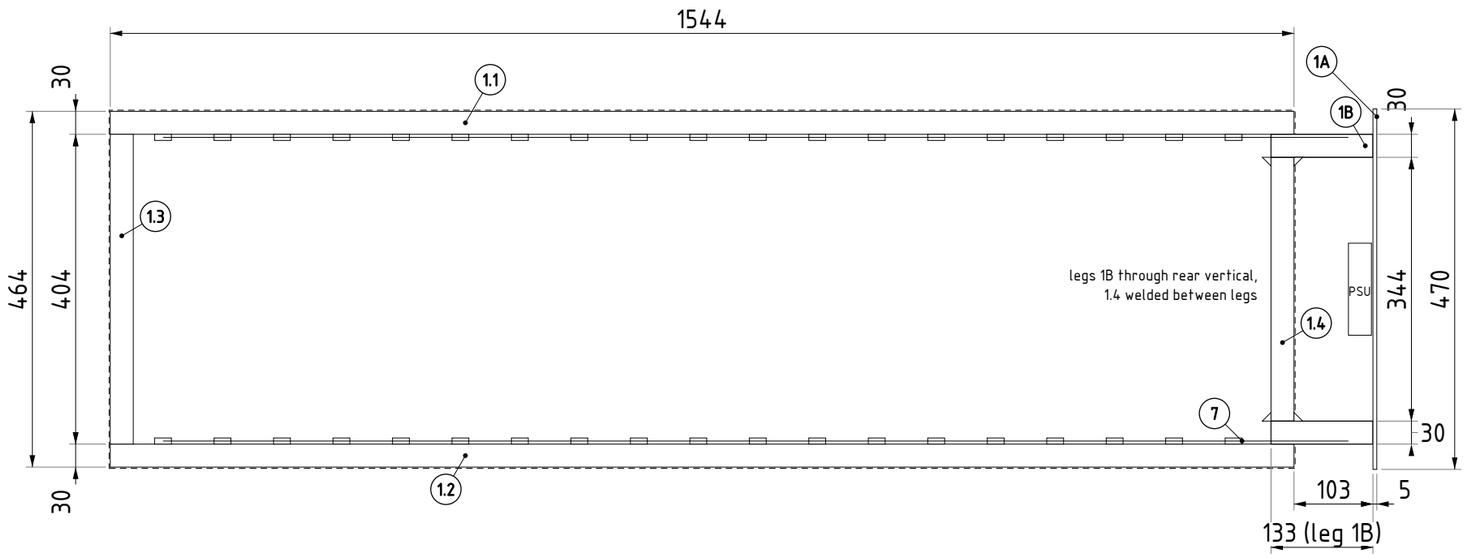


□30x30x2: 3836 mm, welded, ground
LED 38 pcs., 77.6 mm, light to both faces

## FRAME – END VIEW (FROM WALL)

1:8 (mounting plate 1A)


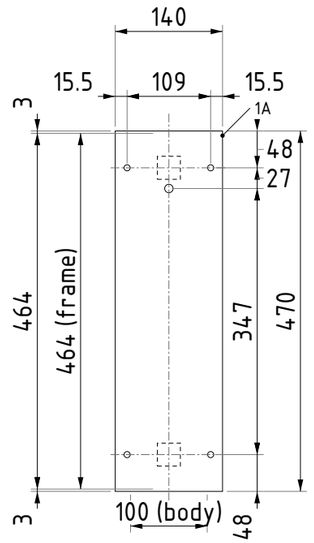



plate t = 5, 4 x ⌀8, welded to legs 1B (dashed); cable ⌀11 on axis

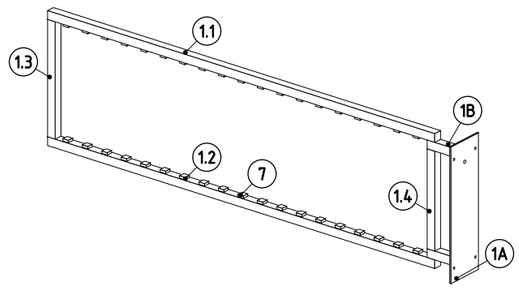


## FRAME – ISOMETRIC

not to scale

| LED (7) | |
|---|---|
| Module | LED |
| Mounting | top + bottom members |
| Qty / pitch | 38 pcs., 77.6 mm |
| PSU | PSU, on plate 1A under covers |

**BILL OF MATERIALS**

| POS | PART | MATERIAL | FINISH | QTY (PERIMETER / AREA) |
|---|---|---|---|---|
| 1.1 | Top member □30x30x2 | Alu EN AW-6060 | white | 1 x 1544 mm |
| 1.2 | Bottom member □30x30x2 | Alu EN AW-6060 | white | 1 x 1544 mm |
| 1.3 | Front vertical □30x30x2 | Alu EN AW-6060 | white | 1 x 404 mm |
| 1.4 | Rear vertical □30x30x2, between legs | Alu EN AW-6060 | white | 1 x 344 mm |
| 1B | Leg □30x30x2, through rear vert. | Alu EN AW-6060 | NCS S 8010-R90B | 2 x 133 mm |
| 1A | Mounting plate 140x470x5 | Alu | NCS S 8010-R90B | 1 pc., 4 x ⌀8 + ⌀11 |
| 7 | LED | LED | - | 38 pcs. |
| 7A | PSU on plate 1A, under covers | PSU | - | 1 pc. |
| 7B | Cable ~230 V from PSU, out via plate | | | 1.5 m |

| MAIN DATA | |
|---|---|
| Frame outer | 1544 x 464 mm |
| Profile | □30x30x2 Alu, centre of depth |
| Legs | □30x30x2 through rear vert., gap 101.5 |
| Leg axes | 374 mm (from glass edge 48) |
| Joints | welded (TIG), ground |
| Body | band 1547 x 467, welded to frame |
| Cable | ~230V 1.5 m: PSU on 1A -> ⌀11 |
| Finish | legs + plates NCS S 8010-R90B |
| Qty | 1 set |

**REVISIONS**

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| A | First issue | 2026-10-15 | |

CLIENT
BN Skilte A/S / danbolig Hornbæk

TITLE
DB-0001 DOUBLE-SIDED LIGHTBOX 1550 x 470, PROJECTING – FRAME (CAD)

ORDER NO.
**ALT0000_00.00_RS**

FILE / DRAWING NO.
PO 3295 / DB-0001

SCALE (DIM. mm)
1:8 / 1:8

FORMAT
A3

REV. A

PROJECTION

DATE
2026-10-15

1 pcs.

Sheet 2 / 3