

FRONT VIEW – SIDE A

1:12

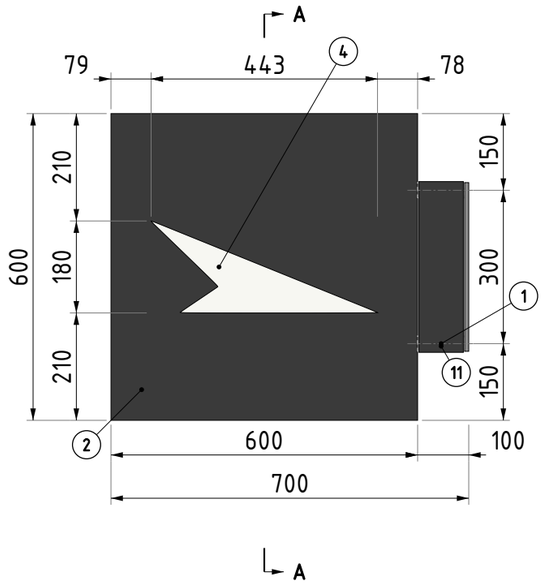

VIEW FROM WALL


1:12

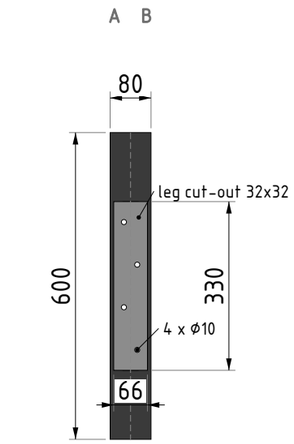

= WALL DRILLING; – – – tray seam


FRONT VIEW – SIDE B

1:12 (mirrored)

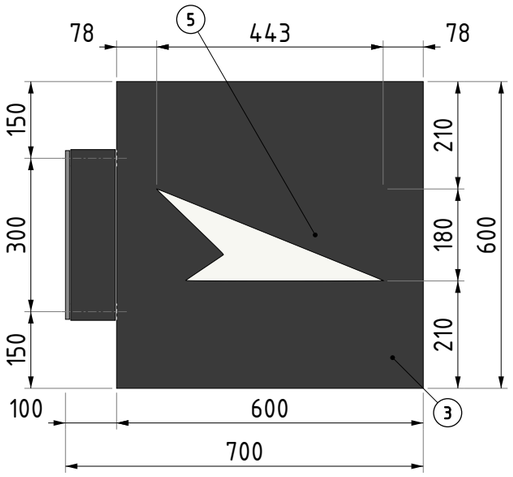


SECTION A-A

1:8

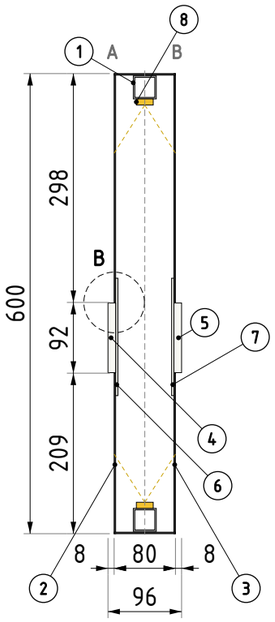

FRAME (1) + LED (8)


1:12 (from side A)

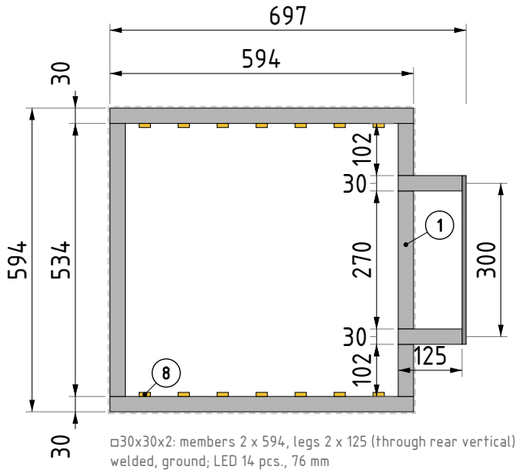

□30x30x2: members 2 x 594, legs 2 x 125 (through rear vertical) welded, ground; LED 14 pcs., 76 mm

PLATE 1A


1:8 (one plate, length = legs)

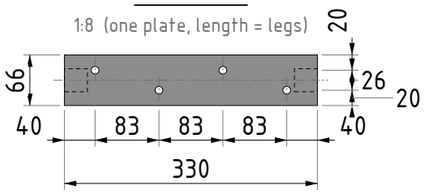


t = 8, 4 x ⌀10 staggered, welded to both legs (– – –)

ASSEMBLY – EXPLODED VIEW


not to scale; tray A – insert 4 – base 6 + nuts – frame + LED – base 7 – insert 5 – tray B; inside white

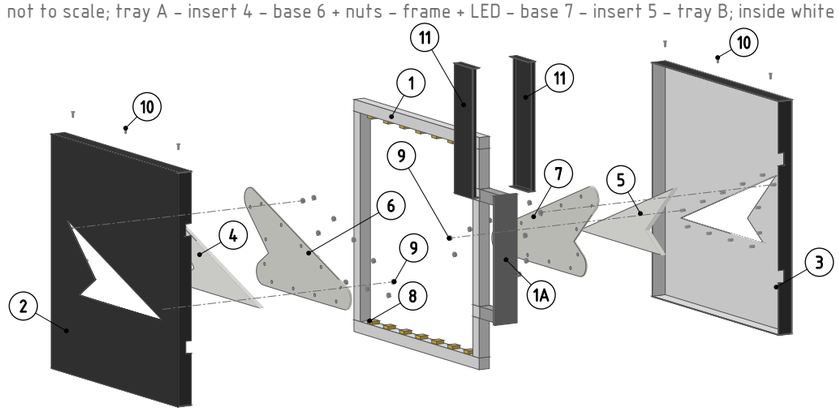



3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE




3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE


TOP VIEW

1:12

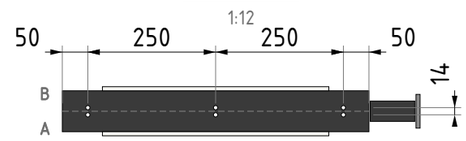

screws 10: 12 pcs. ⌀3.2, top + bottom flanges, 7 from seam

DETAIL B – SECTION TOP / GLASS / BOTTOM 1:4

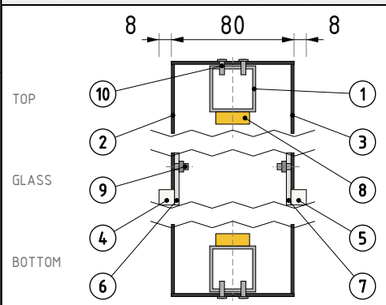

gap 0.7; insert GLUED to base; studs welded inside, 15 from glass

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + 2 legs □30x30x2, frame white	Alu, welded		2446 mm (cut list – frame view)
1A	Mounting plate 66x330x8, 4 x ⌀10	Alu, welded to legs		1 pc.
2	Front A, folded 600x600x40, in white	Alu 2 mm		1 pc.
3	Back B, folded 600x600x40, in white	Alu 2 mm		1 pc.
4	Insert A 10 mm, GLUED to base	Plexi opal white	–	1 pc. 0.027 m²
5	Insert B 10 mm, GLUED to base	Plexi opal white	–	1 pc. 0.027 m²
6	Base A 3 mm, 12 x ⌀8 (DXF)	Plexi opal white	–	1 pc. 0.064 m²
7	Base B 3 mm, 12 x ⌀8 (DXF)	Plexi opal white	–	1 pc. 0.064 m²
8	LED Kaisen DUOLITE DS15	PSU KPS-V12-36W67-RP	6500 K	14 pcs. (20.2 W)
9	Stud (welded to Alu) + nut		–	24 pcs.
10	Screw, ⌀3.2 holes in flanges	A2	–	12 pcs.
11	Leg cover A + B, 2 x ⌀3.2 top (DXF)	Alu 2, ribs 10 notched		2 pcs., 87 x 334 x 20

MAIN DATA

Product	P10 lightbox, 2-sided
Size	600 x 600 x 80 (+ 2 x 8)
From wall	100 mm (legs 92 + plate 8)
Body	Alu 2, 2 trays A + B, inside white
Glass	3+10 mm, cut-out + 0.7
Frame	□30x30x2 white, legs
LED / PSU	14 x DUOLITE DS15, KPS-V12-36W67-RP
Qty	
Weight (calc.)	≈ 7.7 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT

TEST


TITLE

P10_lightbox 600x600x80 – push-through (etalon)

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST P10_lightbox			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:2 / 1:1	A3	1 / 2	A	
DRAWN	CHECKED	DATE		
		2026-10-13		

FRAME (1) – SIDE VIEW

1:8 (from side A, welded)

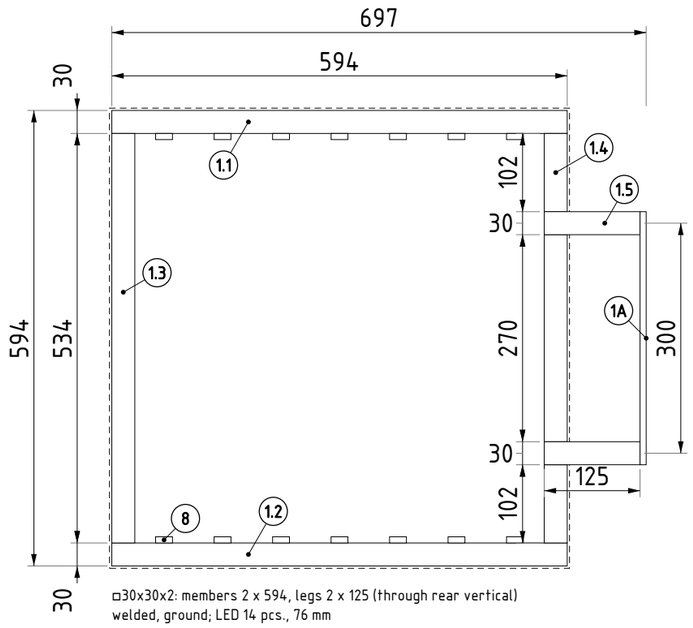

□30x30x2: members 2 x 594, legs 2 x 125 (through rear vertical)
welded, ground; LED 14 pcs., 76 mm

FRAME – END VIEW (FROM WALL)

1:8 (mounting plate 1A)


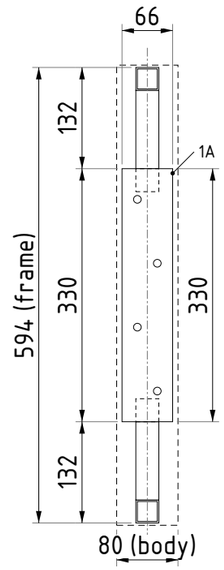


plate t = 8, 4 x ⌀10, welded to legs; legs dashed; holes – PLATE 1A




FRAME – ISOMETRIC

not to scale

PLATE 1A

1:4 (one plate, length = legs)

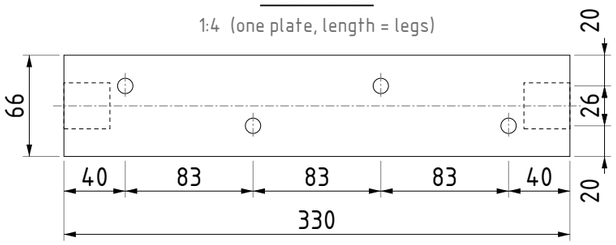

t = 8, 4 x ⌀10 staggered, welded to both legs (– – –)

LED (8)	
Module	Kaisen DUOLITE DS15
Beam	10° x 65° (double-sided)
Mounting	top + bottom members
Qty / pitch	14 pcs., 76.3 mm (table 80)
Power total	20.2 W
PSU	KPS-V12-36W67-RP, place:
Supply	check:

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member □30x30x2	Alu EN AW-6060	white	1 x 594 mm
1.2	Bottom member □30x30x2	Alu EN AW-6060	white	1 x 594 mm
1.3	Front vertical □30x30x2	Alu EN AW-6060	white	1 x 534 mm
1.4	Rear vertical parts □30x30x2	Alu EN AW-6060	white	3 pcs.: 102 + 270 + 102 mm
1.5	Legs □30x30x2 (through rear vertical)	Alu EN AW-6060		2 x 125 mm
1A	Mounting plate 66x330x8, 4 x ⌀10	Alu		1 pc.
	Frame profile total			2446 mm (+ cut allowance)
8	LED Kaisen DUOLITE DS15	12 V	6500 K	14 pcs.
8A	PSU	KPS-V12-36W67-RP	IP67	1 pc.
8B	Cable 2 x 0.75 (LED -> PSU)			length:

MAIN DATA	
Frame outer	594 x 594 mm
Profile	□30x30x2 Alu, centre of depth
Legs	2 x 125, through rear vertical, axes 300
Plate	66 x 330 x 8, staggered
Joints	welded (TIG), ground
Finish	legs + plate ; frame white
Qty	? set

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT
TEST

TITLE
P10_lightbox 600x600x80 – push-through (etalon) – FRAME (CAD)

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST P10_lightbox			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:8 / 1:4	A3	2 / 2	A	
DRAWN	CHECKED	DATE		
		2026-10-13		