

FRONT VIEW – SIDE A

1:10

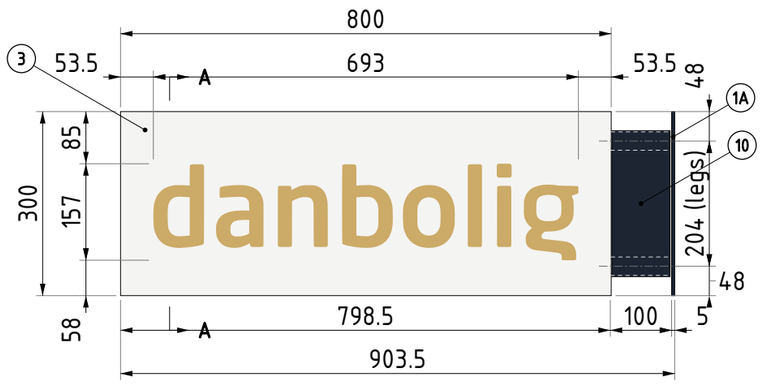

VIEW FROM WALL

1:10

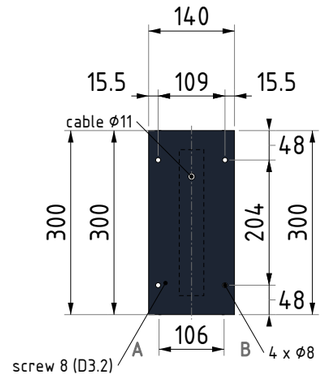


= WALL DRILLING

CABLE EXIT: ~230 V cable 1.5 m through plate Ø11 into wall, on axis, 75 mm from top of sign. PSU on plate, under leg covers.


FRONT VIEW – SIDE B

1:10 (mirrored)

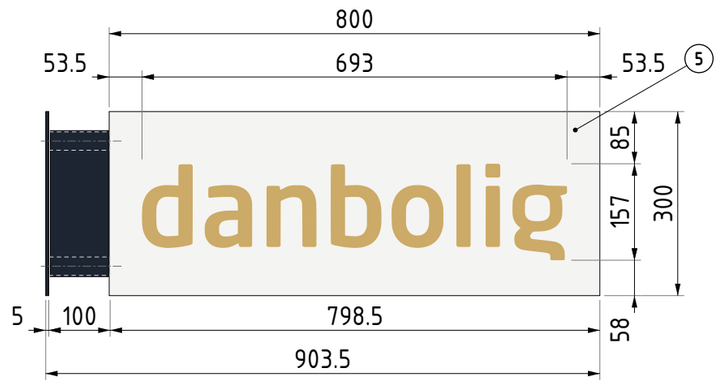

SECTION A–A


1:8

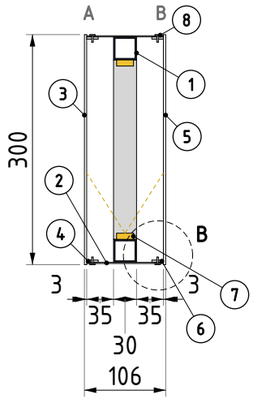

TOP VIEW


1:10

20 screws: 6 per side of band, into PVC edge



3D VIEW – SIDE A

ILLUSTRATIVE – NOT TO SCALE




3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE

ASSEMBLY – EXPLODED VIEW

not to scale; face A + PVC 4 – body 2 + frame 1 + LED 7 – PVC 6 + face B; inside white

DETAIL B – SECTION TOP / BOTTOM 1:2.5

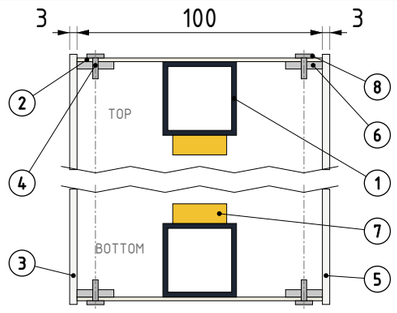

screws 8 (D3.2) through band into PVC edge; band welded to frame

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame □30x30x2 (cut list – sheet 2)	Alu EN AW-6060	white (inside)	2 x 794 + 234 + 174 = 1996 mm
1B	Legs □30x30x2, through rear vert.	Alu, welded to frame	NCS S 8010-R90B	2 x 132 mm
1A	Mounting plate 140x300x5, 4 x Ø8 + Ø11	Alu, welded to legs	NCS S 8010-R90B	1 pc.
2	Body band 1.5 x 100, inside white	Alu, folded, welded to frame	RAL 9010 out	797 x 297: 2188 mm
3	Face A (glass)	3 mm opal white plexiglass	–	800 x 300 = 0.24 m²
4	PVC edge 3 x 15 (face A)	PVC, glued to face	white	2176 mm
5	Face B (glass, mirror)	3 mm opal white plexiglass	–	800 x 300 = 0.24 m²
6	PVC edge 3 x 15 (face B)	PVC, glued to face	white	2176 mm
7	LED + PSU (on 1A)	LED / PSU	–	20 pcs. + 1 PSU
8	Tapping screw, D3.2 holes	A2	–	20 pcs. (into PVC edge)
9	Logo, sides A + B	3M 100-54	–	2 pcs., 693 x 157 mm
10	Leg cover A + B, 2 x Ø3.2 top (DXF)	Alu 2, ribs 10 notched	NCS S 8010-R90B	2 pcs., 95 x 238 x 20

MAIN DATA

Product	double-sided lightbox, projecting
Size (glass)	800 x 300 x 106 mm
Sides	A + B: logo 693 x 157 (9)
From wall	903.5 mm (body 108)
Fixing	1 plate 140x300, 4 x Ø8, 109 x 204
LED / PSU	20 x LED, PSU
Finish	legs + plates NCS S 8010-R90B
Cable	~230V 1.5 m via plate Ø11
Qty	1 pcs.
Weight (calc.)	≈ 5.1 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT

BN Skilte A/S / danbolig Hornbæk

TITLE

DB-0001 DOUBLE-SIDED LIGHTBOX 800 x 300, PROJECTING


ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	PO 3295 / DB-0001

SCALE (DIM. mm)	FORMAT	REV.	PROJECTION
1:10 / 1:8	A3	A	

DATE		
2026-10-15	1 pcs.	Sheet 1 / 3

FRAME (1) – SIDE VIEW

1:4 (from side A, welded)

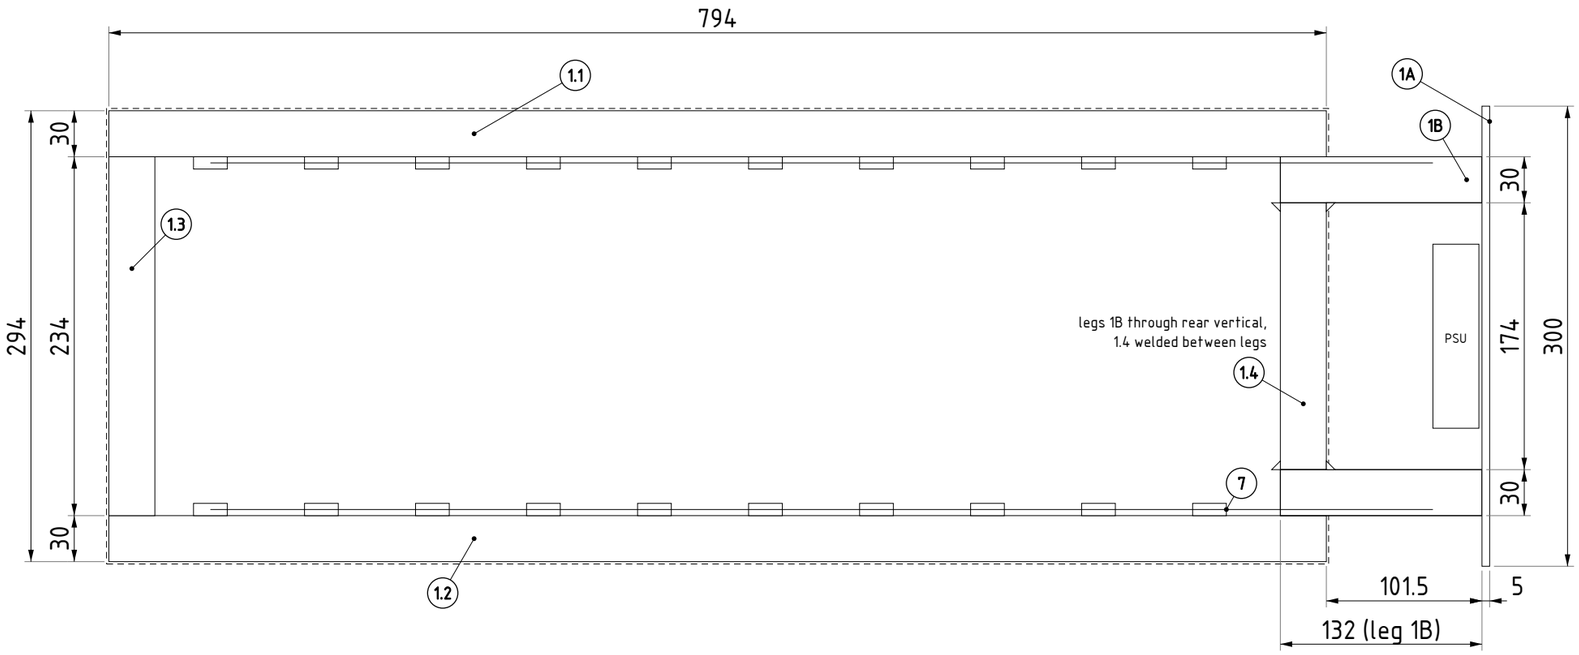

□30x30x2: 1996 mm, welded, ground
LED 20 pcs., 72.4 mm, light to both faces

FRAME – END VIEW (FROM WALL)

1:4 (mounting plate 1A)


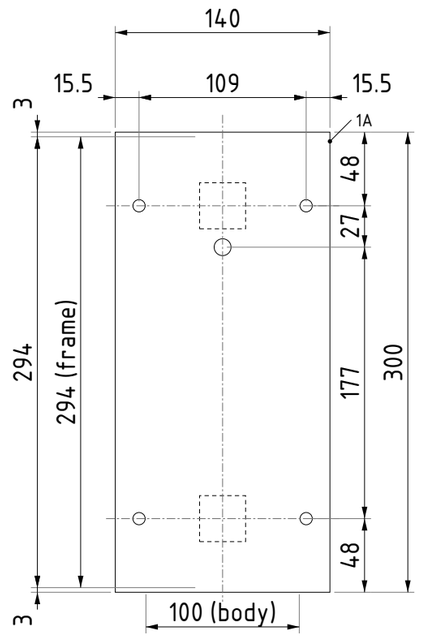


plate t = 5, 4 x ⌀8, welded to legs 1B (dashed); cable ⌀11 on axis

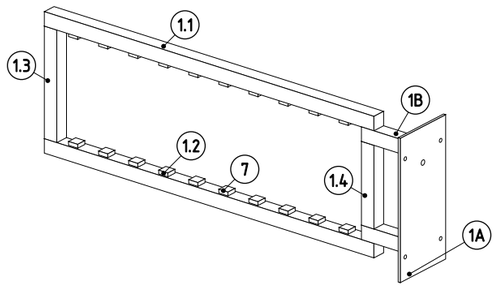

FRAME – ISOMETRIC

not to scale

LED (7)	
Module	LED
Mounting	top + bottom members
Qty / pitch	20 pcs., 72.4 mm
PSU	PSU, on plate 1A under covers

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member □30x30x2	Alu EN AW-6060	white	1 x 794 mm
1.2	Bottom member □30x30x2	Alu EN AW-6060	white	1 x 794 mm
1.3	Front vertical □30x30x2	Alu EN AW-6060	white	1 x 234 mm
1.4	Rear vertical □30x30x2, between legs	Alu EN AW-6060	white	1 x 174 mm
1B	Leg □30x30x2, through rear vert.	Alu EN AW-6060	NCS S 8010-R90B	2 x 132 mm
1A	Mounting plate 140x300x5	Alu	NCS S 8010-R90B	1 pc., 4 x ⌀8 + ⌀11
7	LED	LED	–	20 pcs.
7A	PSU on plate 1A, under covers	PSU	–	1 pc.
7B	Cable ~230 V from PSU, out via plate			1.5 m

MAIN DATA	
Frame outer	794 x 294 mm
Profile	□30x30x2 Alu, centre of depth
Legs	□30x30x2 through rear vert., gap 100
Leg axes	204 mm (from glass edge 48)
Joints	welded (TIG), ground
Body	band 797 x 297, welded to frame
Cable	~230V 1.5 m: PSU on 1A -> ⌀11
Finish	legs + plates NCS S 8010-R90B
Qty	1 set

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-15	

CLIENT
BN Skilte A/S / danbolig Hornbæk

TITLE
DB-0001 DOUBLE-SIDED LIGHTBOX 800 x 300, PROJECTING – FRAME (CAD)

ORDER NO.
ALT0000_00.00_RS

FILE / DRAWING NO.
PO 3295 / DB-0001

SCALE (DIM. mm)
1:4 / 1:4

FORMAT
A3

REV. A

PROJECTION

DATE
2026-10-15

1 pcs.

Sheet 2 / 3