
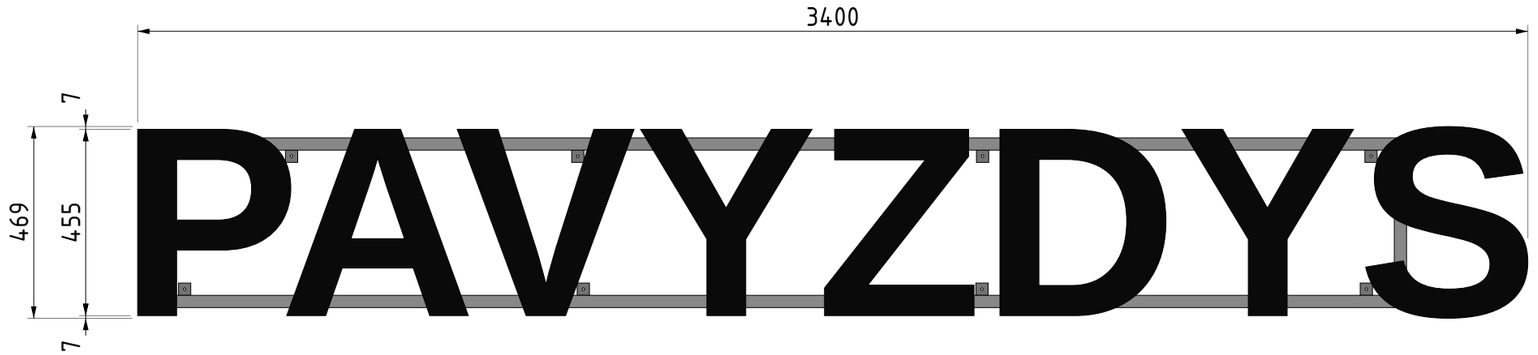





FRONT VIEW

SCALE 1:15

SIDE VIEW (RIGHT)

SCALE 1:15

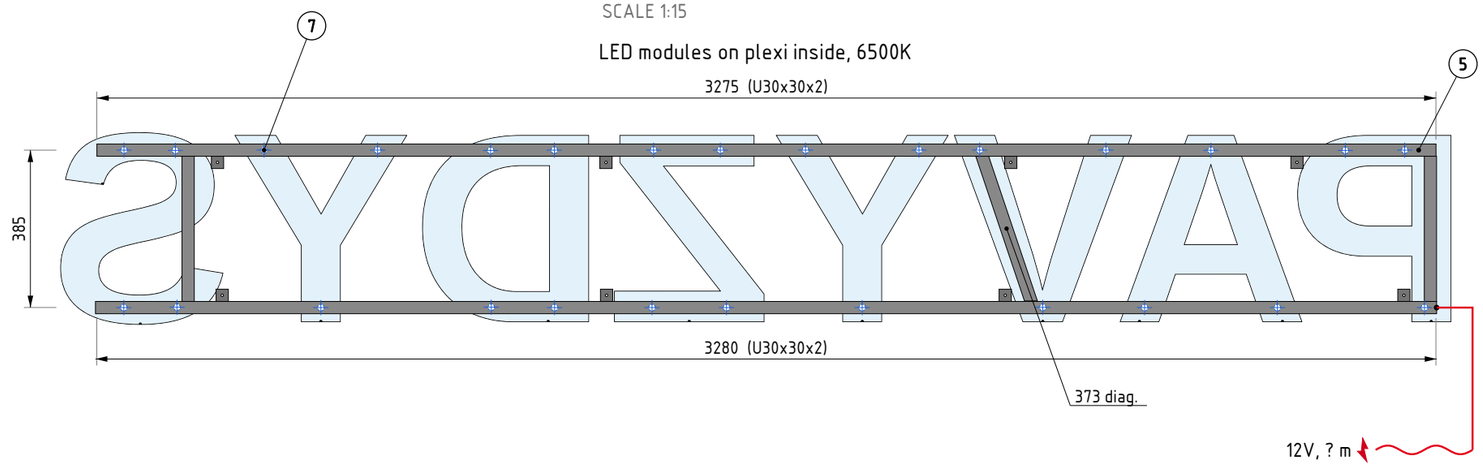

REAR VIEW (MIRRORED)


SCALE 1:15 | true view from the back | 27 spacers ⌀16 (blue) – centre of fixing area



3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P3 HALO ON RAILS – TYPICAL SECTION

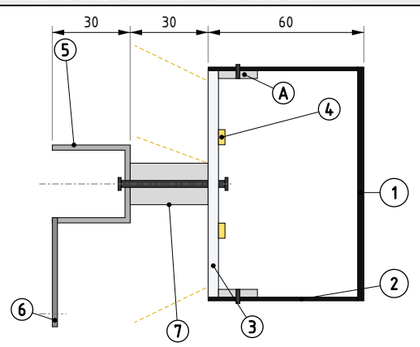

BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Letter face	Alu 2 mm	RAL 9005	1,69 m²
2	Letter return	Alu 1 mm	RAL 9005	17,13 m / 1,28 m²
3	Letter back (halo, light to the back)	Plexiglass 4 mm	transparent	17,13 m / 1,68 m²
4	LED modules on plexi inside, 6500K		6500K	
5	Rail U 30 x 30 x 2 mm with ears, one frame	Aluminium		7,64 m (2 x 6 m bars)
6	Mounting ear 30 x 30 x 2 mm, ⌀6 mm hole	Aluminium		8 pcs. (0 extended)
7	Spacer tube ⌀16 x 30 mm + threaded rod M4			27 pcs.
A	PVC fixing edge for plexi	PVC 3 mm	–	17,13 m
B	Screw through return into PVC edge	DIN 7982 2,9 x 9,5 mm	–	
8	Cable exit from rail end, 12V	cable ? m	–	1 pcs.
9	PSU 12V			
10	Wall fixing		–	

MAIN DATA

Quantity	
Overall size	3400 x 469 mm
Profile	P3 on spacers
Letter depth	60 + spacers 30
Face / returns	Alu 2 / 1 mm, RAL 9005
Back	transparent plexiglass 4 mm + PVC edge
Rails	U 30 x 30 x 2 mm, RAL ____
Illumination	LED to the back (halo), 6500K
Power	12V, cable ? m
Wall	
Weight (calc.)	≈ 13 kg / pcs, excl. PSU

REVISIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-17	

CLIENT

TEST


TITLE


P3 – halo letters on spacers (PAVYZDYS)

ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	P3_Pavyzdys_P3

SCALE	FORMAT	REV.	PROJECTION
1:15	A3	A	

DATE		
2026-10-17	1 pcs.	Sheet 1 / 2

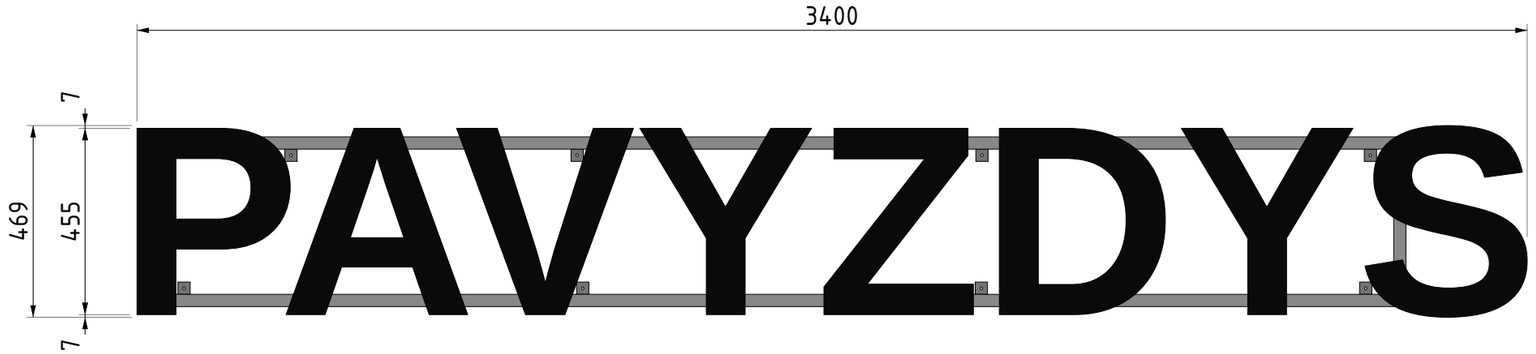




FRONT VIEW

SCALE 1:15

SIDE VIEW (RIGHT)

SCALE 1:15

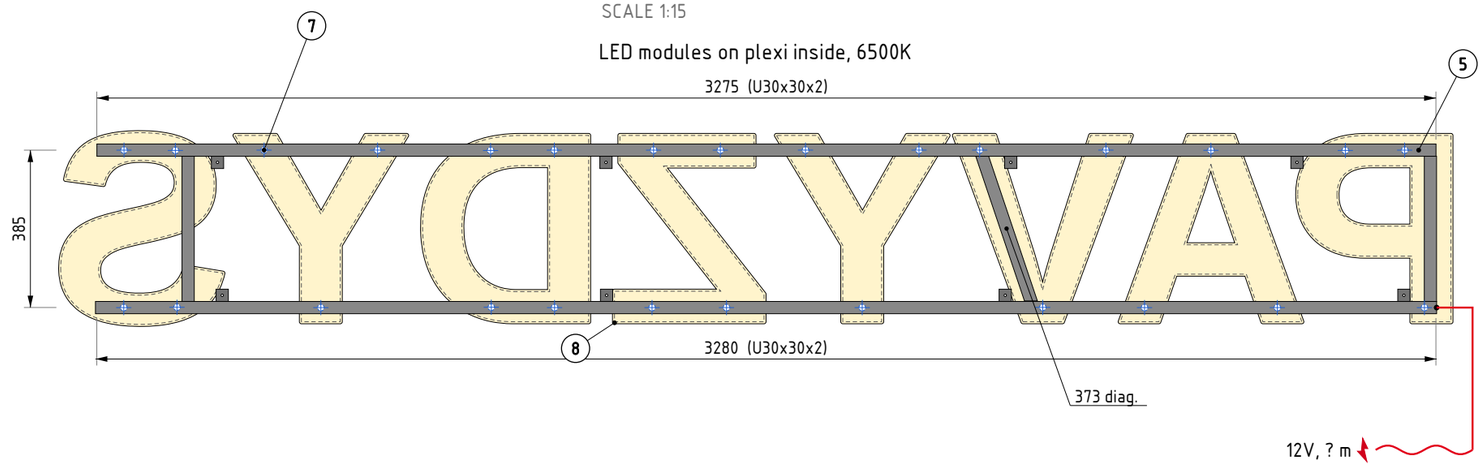

REAR VIEW (MIRRORED)


SCALE 1:15 | true view from the back | 27 spacers ⌀16 (blue) – centre of fixing area



3D VIEW

ILLUSTRATIVE – NOT TO SCALE

PROFILE P3+REFLECTOR ON RAILS – SECTION

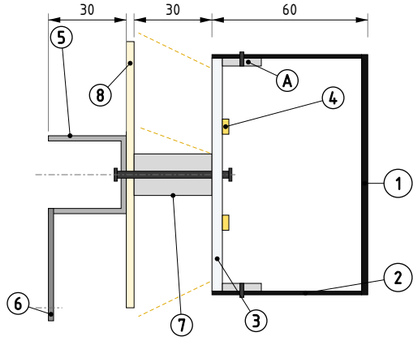

BILL OF MATERIALS (per 1 pcs.)

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
①	Letter face	Alu 2 mm	RAL 9005	1,69 m²
②	Letter return	Alu 1 mm	RAL 9005	17,13 m / 1,28 m²
③	Letter back (halo, light to the back)	Plexiglass 4 mm	transparent	17,13 m / 1,68 m²
④	LED modules on plexi inside, 6500K		6500K	
⑤	Rail U 30 x 30 x 2 mm with ears, one frame	Aluminium		7,64 m (2 x 6 m bars)
⑥	Mounting ear 30 x 30 x 2 mm, ⌀6 mm hole	Aluminium		8 pcs. (0 extended)
⑦	Spacer tube ⌀16 x 30 mm + threaded rod M4			27 pcs.
⑧	Reflector plate, letter +5 mm (behind letter, on rail)	ACM 3 mm		8 pcs. / 1,90 m²
Ⓐ	PVC fixing edge for plexi	PVC 3 mm	–	17,13 m
Ⓑ	Screw through return into PVC edge	DIN 7982 2,9 x 9,5 mm	–	
⑨	Cable exit from rail end, 12V	cable ? m	–	1 pcs.
⑩	PSU 12V			
⑪	Wall fixing		–	

MAIN DATA

Quantity	
Overall size	3400 x 469 mm
Profile	P3+reflector on spacers
Letter depth	60 + spacers 30
Face / returns	Alu 2 / 1 mm, RAL 9005
Back	transparent plexiglass 4 mm + PVC edge
Rails	U 30 x 30 x 2 mm, RAL ____
Illumination	LED to the back (halo), 6500K
Power	12V, cable ? m
Wall	
Weight (calc.)	≈ 13 kg / pcs, excl. PSU

REVISIONS

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-17	

CLIENT

TEST

TITLE

P3+reflector – halo letters on spacers with reflectors (PAVYZDYS)

ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	P3_Pavyzdys_P3_reflector

SCALE	FORMAT	REV.	PROJECTION
1:15	A3	A	

DATE 2026-10-17 | 1 pcs. | Sheet 2 / 2