

FRONT VIEW – SIDE A

1:8

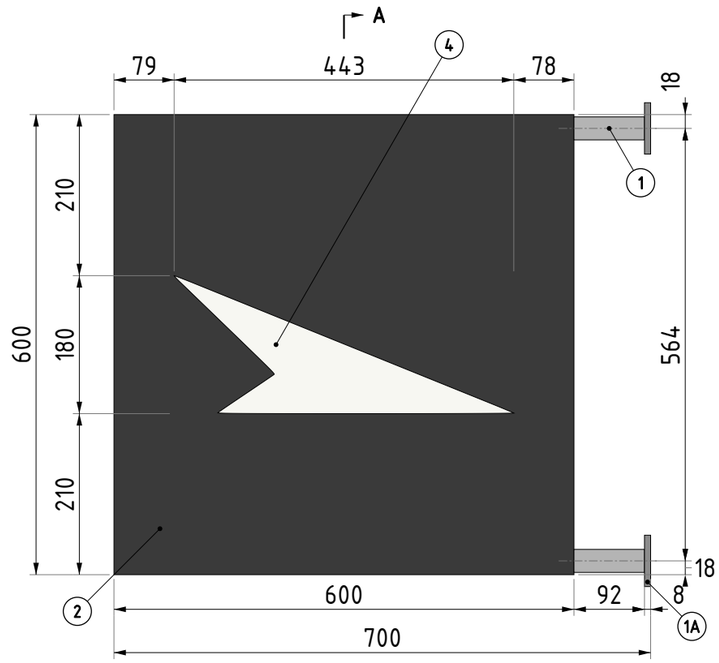

VIEW FROM WALL


1:8

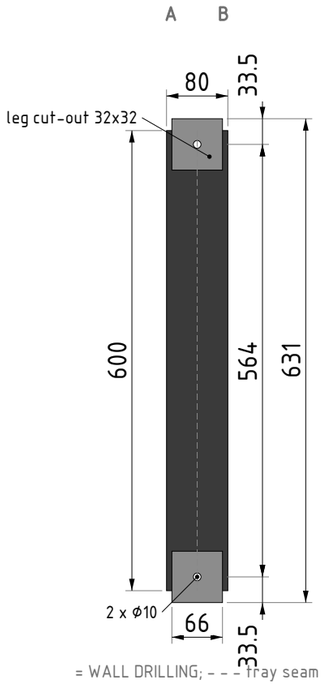

= WALL DRILLING; - - - tray seam


FRONT VIEW – SIDE B

1:8 (mirrored)

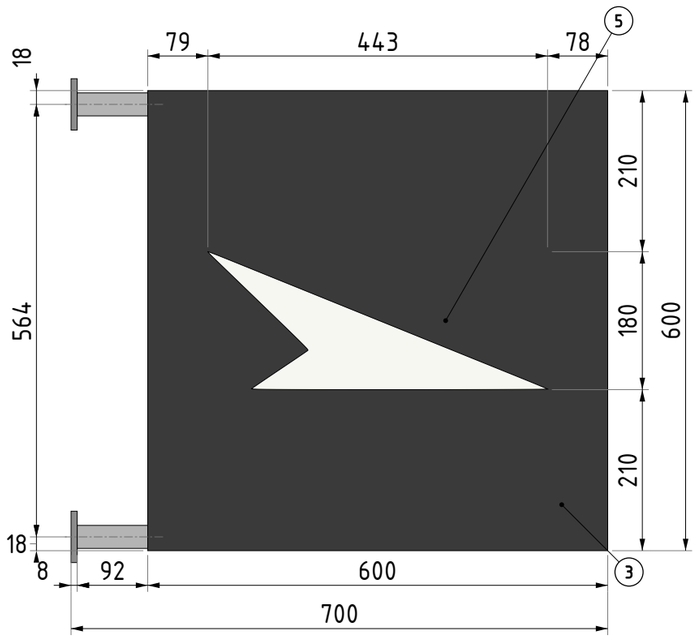


SECTION A-A

1:6

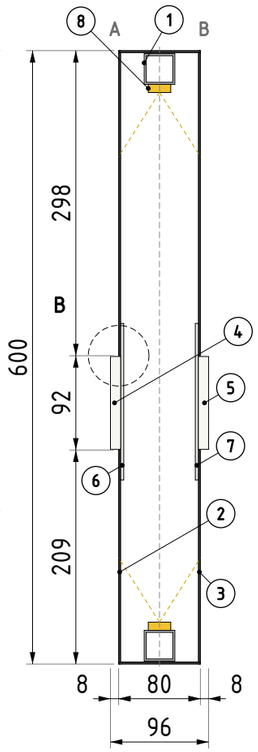


TOP VIEW

1:8

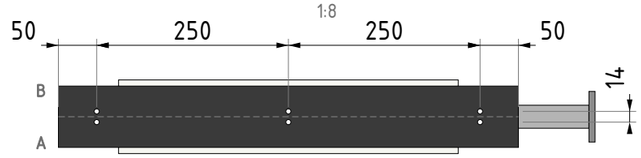


screws 10: 12 pcs. ⌀3.2, top + bottom flanges, 7 from seam



3D VIEW – SIDE A


ILLUSTRATIVE – NOT TO SCALE



3D VIEW – SIDE B

ILLUSTRATIVE – NOT TO SCALE

DETAIL B – CUT-OUT EDGE 1.5:1



gap 0.7; insert 10 GLUED to base 6
stud welded (D6 mark); B = mirror

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + legs □30x30x2 (sheet 2)	Alu, welded		2 x 689 + 2 x 534 mm
1A	Mounting plate 66x67x8, ⌀10	Alu, welded to leg		2 pcs.
2	Front A, folded 600x600x40 (sheet 2)	Alu 2 mm		1 pc.
3	Back B, folded 600x600x40 (sheet 2)	Alu 2 mm		1 pc.
4	Insert A 10 mm, GLUED to base	Plexi opal white	-	1 pc. 0.027 m²
5	Insert B 10 mm, GLUED to base	Plexi opal white	-	1 pc. 0.027 m²
6	Base A 3 mm, 12 x ⌀8 (sheet 2)	Plexi opal white	-	1 pc. 0.064 m²
7	Base B 3 mm, 12 x ⌀8 (sheet 2)	Plexi opal white	-	1 pc. 0.064 m²
8	LED Kaisen DUOLITE DS15 (sheet 2)	PSU KPS-V12-36W67-RP	6500 K	14 pcs. (20.2 W)
9	Stud (welded to Alu) + nut		-	24 pcs.
10	Screw, ⌀3.2 holes in flanges	A2	-	12 pcs.

MAIN DATA

Product	P10 lightbox, 2-sided
Size	600 x 600 x 80 (+ 2 x 8)
From wall	100 mm (legs 92 + plate 8)
Body	Alu 2, 2 folded trays A + B, seam centre
Glass	3+10 mm, cut-out + 0.7
Frame	□30x30x2
LED / PSU	14 x DUOLITE DS15, KPS-V12-36W67-RP
Qty	
Weight (calc.)	≈ 7.4 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT

TEST


TITLE

P10_lightbox 600x600x80 – push-through (etalon) – GA

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST P10_lightbox			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:2 / 1:1	A3	1 / 3	A	
DRAWN	CHECKED	DATE		
		2026-10-13		


FRAME (1) + LED (8)

1:12 (from side A, welded)

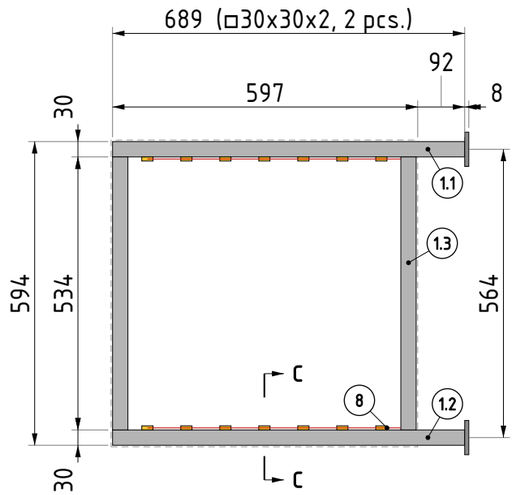

SECTION C–C (LED)


1:2

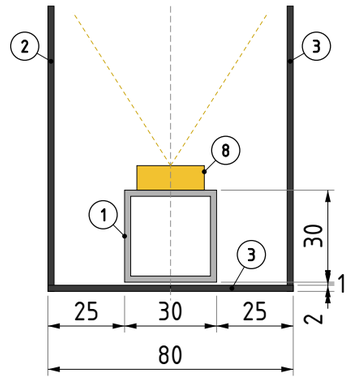

DUOLITE on member – light to both faces; trays seam at centre

PLATE 1A


1:2



t = 8, Ø10, welded to leg (2 pcs.)

FRONT A (2) – FLAT PATTERN, FACE OUT


1:10 (back B (3) = mirror, wall side left)

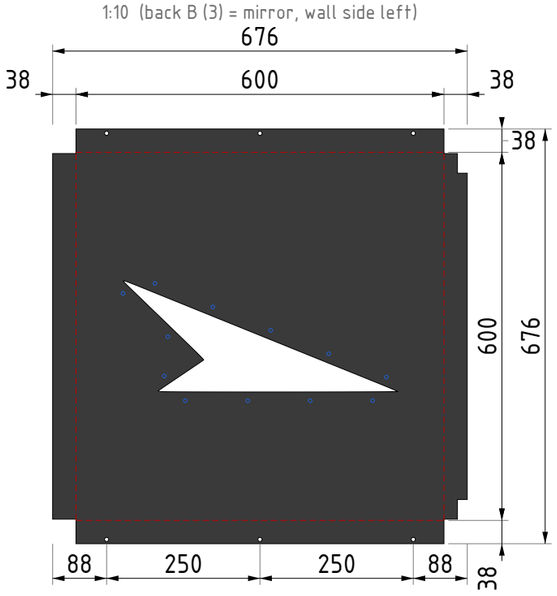

Alu 2; bend lines 600 x 600 (red), flanges 38 from bend line, sides inside;
Ø3.2 7 from edge; cut-out + 0.7; D6 blue = studs; leg cut-outs wall side

BASE 6 + INSERT 4 (A, from outside)

1:4 (B = mirror)

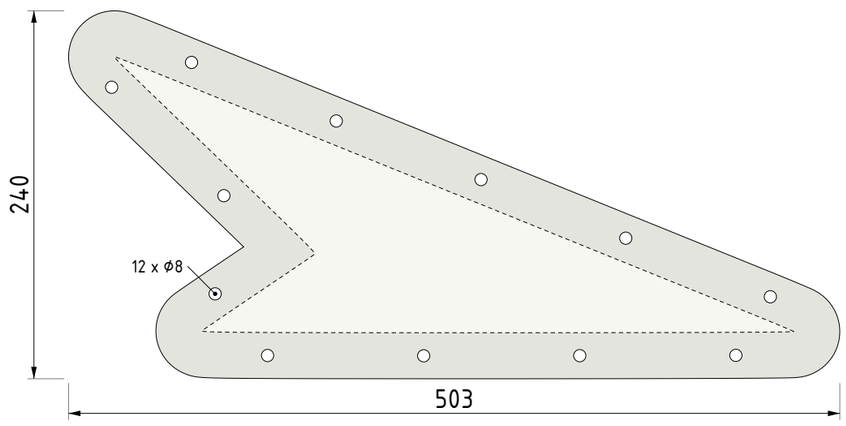

base 6 = contour + 30 (round); Ø8 at 15, ~100; insert 4 (– – –) glued

LED (8)	
Module	Kaisen DUOLITE DS15
Mounting	top + bottom members
Qty / pitch	14 pcs., 76.3 mm (table 80)
Kaisen table	1900 lx – depth < table min!
Power total	20.2 W
PSU	KPS-V12-36W67-RP, place:
Cable	through leg -> plate:

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1.1	Top member + leg □30x30x2	Alu EN AW-6060		1 x 689 mm
1.2	Bottom member + leg □30x30x2	Alu EN AW-6060		1 x 689 mm
1.3	Vertical □30x30x2	Alu EN AW-6060		2 x 534 mm
1A	Plate 66x67x8, Ø10	Alu		2 pcs.
	Frame profile total			2446 mm (+ cut allowance)
8	LED Kaisen DUOLITE DS15	12 V	6500 K	14 pcs.
8A	PSU	KPS-V12-36W67-RP	IP67	1 pc.
8B	Cable 2 x 0.75 (LED -> PSU)			length:

MAIN DATA	
Frame outer	594 x 594 mm
Profile	□30x30x2 Alu, centre of depth
Legs	top + bottom members, +92 out of body
Leg axes	564 mm (from box edge 18)
Joints	welded (TIG), ground
Trays	2 x folded Alu 2, flat 676 x 676
Finish	
Qty	

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT
TEST

TITLE
P10_lightbox 600x600x80 – push-through (etalon) – FRAME + LED + PARTS


ORDER NO.	FILE / DRAWING NO.
ALT0000_00.00_RS	TEST P10_lightbox

SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:2 / 1:1	A3	2 / 3	A	

DRAWN	CHECKED	DATE
		2026-10-13

ASSEMBLY – EXPLODED VIEW

ILLUSTRATIVE – NOT TO SCALE; parts moved apart along depth

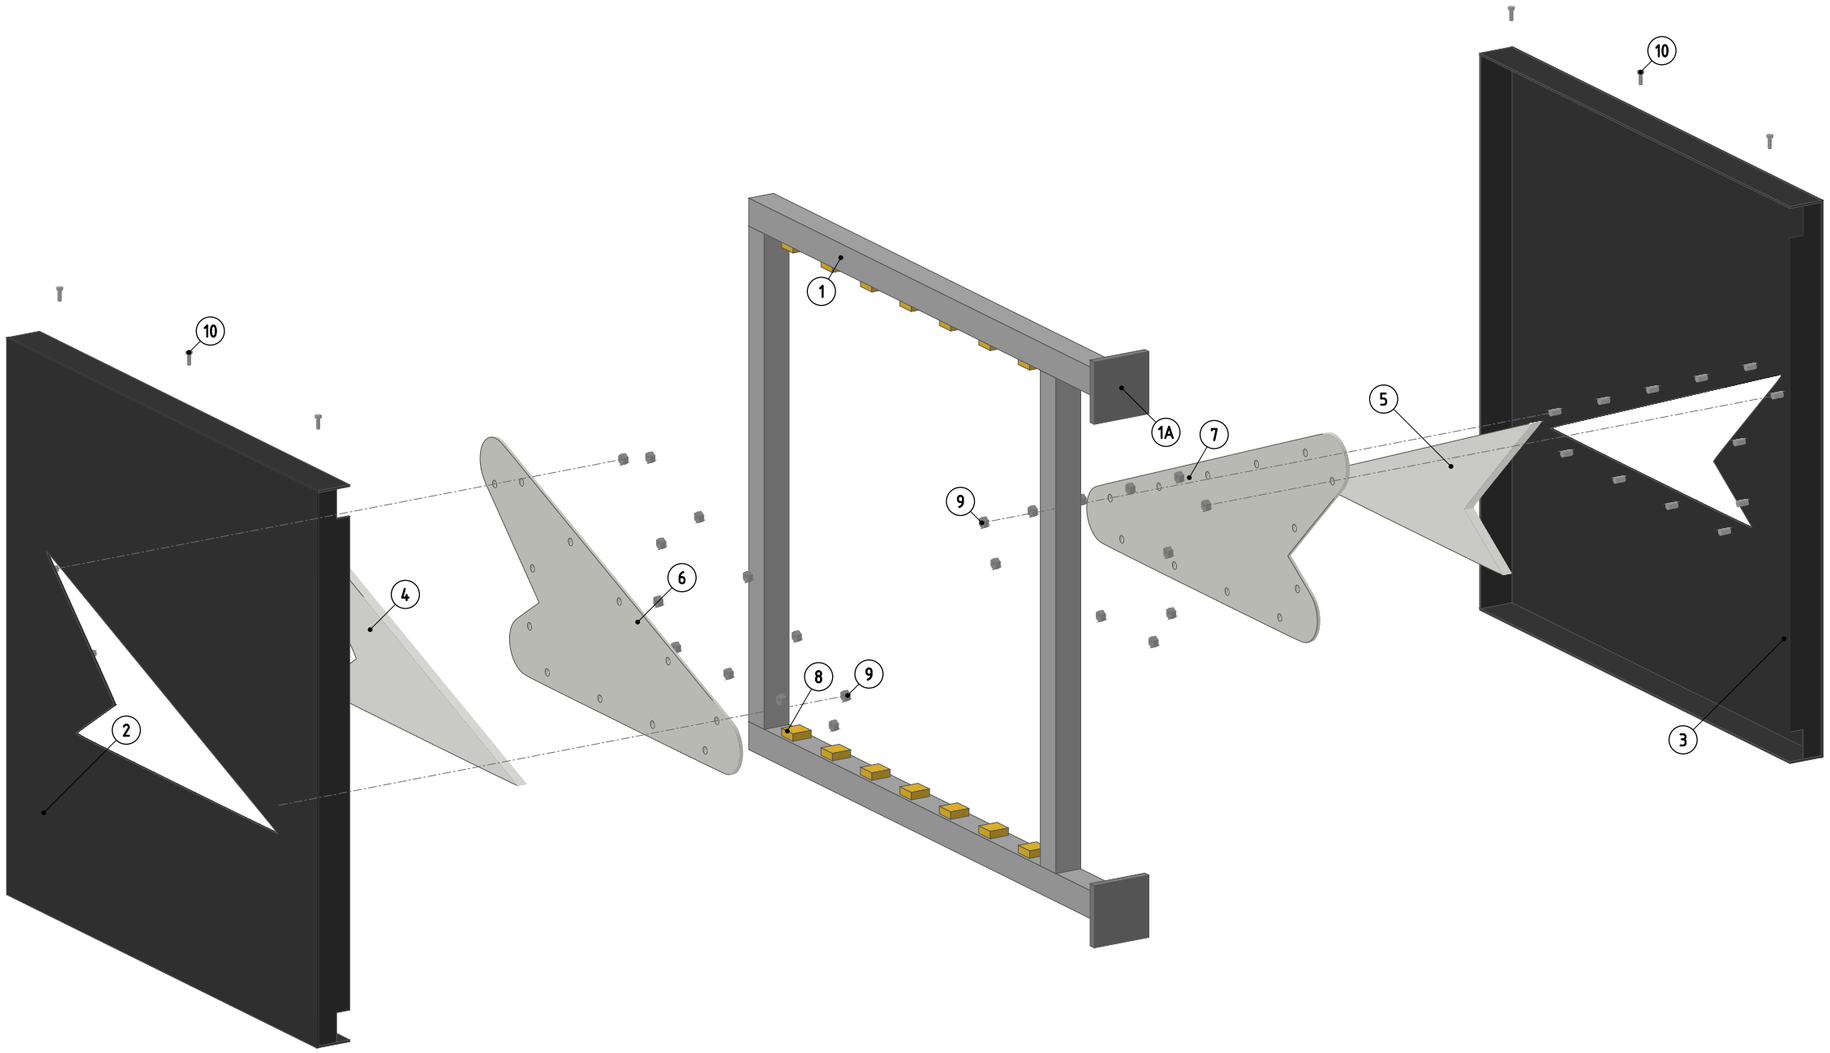

ASSEMBLY SEQUENCE

order of work

STEP 1 – FRAME (1)

Weld members □30x30x2: top / bottom = legs + 2 verticals between them; weld plates 1A to legs, grind welds (sheet 2).

STEP 2 – LED (8)

Fix 14 x DUOLITE DS15 on top + bottom members, wire to PSU; cable through leg and plate.

STEP 3 – TRAYS A (2) / B (3)

Laser cut flat (DXF), bend flanges 90 deg, weld studs (9) at blue D6 marks on the inside face.

STEP 4 – INSERT -> BASE

Glue insert A (4) on base A (6), insert B (5) on base B (7); insert centred on base contour.

STEP 5 – BASE -> TRAY


Put base on studs from inside, insert goes through cut-out (gap 0.7 around); tighten nuts (9).

STEP 6 – CLOSE

Slide tray A over frame (legs in flange notches), then tray B; seam at centre; screws (10) in top + bottom flanges.

Side B = mirror of side A.
Balloons = BOM positions.

DETAIL B – CUT-OUT EDGE 1.5:1



gap 0.7; insert 10 GLUED to base 6
stud welded (D6 mark); B = mirror

BILL OF MATERIALS

POS	PART	MATERIAL	FINISH	QTY (PERIMETER / AREA)
1	Frame + legs □30x30x2 (sheet 2)	Alu, welded		2 x 689 + 2 x 534 mm
1A	Mounting plate 66x67x8, Ø10	Alu, welded to leg		2 pcs.
2	Front A, folded 600x600x40 (sheet 2)	Alu 2 mm		1 pc.
3	Back B, folded 600x600x40 (sheet 2)	Alu 2 mm		1 pc.
4	Insert A 10 mm, GLUED to base	Plexi opal white	-	1 pc. 0.027 m²
5	Insert B 10 mm, GLUED to base	Plexi opal white	-	1 pc. 0.027 m²
6	Base A 3 mm, 12 x Ø8 (sheet 2)	Plexi opal white	-	1 pc. 0.064 m²
7	Base B 3 mm, 12 x Ø8 (sheet 2)	Plexi opal white	-	1 pc. 0.064 m²
8	LED Kaisen DUOLITE DS15 (sheet 2)	PSU KPS-V12-36W67-RP	6500 K	14 pcs. (20.2 W)
9	Stud (welded to Alu) + nut		-	24 pcs.
10	Screw, Ø3.2 holes in flanges	A2	-	12 pcs.

MAIN DATA

Product	P10 lightbox, 2-sided
Size	600 x 600 x 80 (+ 2 x 8)
From wall	100 mm (legs 92 + plate 8)
Body	Alu 2, 2 folded trays A + B, seam centre
Glass	3+10 mm, cut-out + 0.7
Frame	□30x30x2
LED / PSU	14 x DUOLITE DS15, KPS-V12-36W67-RP
Qty	
Weight (calc.)	≈ 7.4 kg / pcs, excl. PSU

REVISIONS

REV	DESCRIPTION	DATE	BY
A	First issue	2026-10-13	

CLIENT
TEST

TITLE
P10_lightbox 600x600x80 – push-through (etalon) – ASSEMBLY

ORDER NO.	FILE / DRAWING NO.			
ALT0000_00.00_RS	TEST P10_lightbox			
SCALE (DIM. mm)	FORMAT	SHEET	REV.	PROJECTION
1:5 / 1:2 / 1:1	A3	3 / 3	A	
DRAWN	CHECKED	DATE		
		2026-10-13		