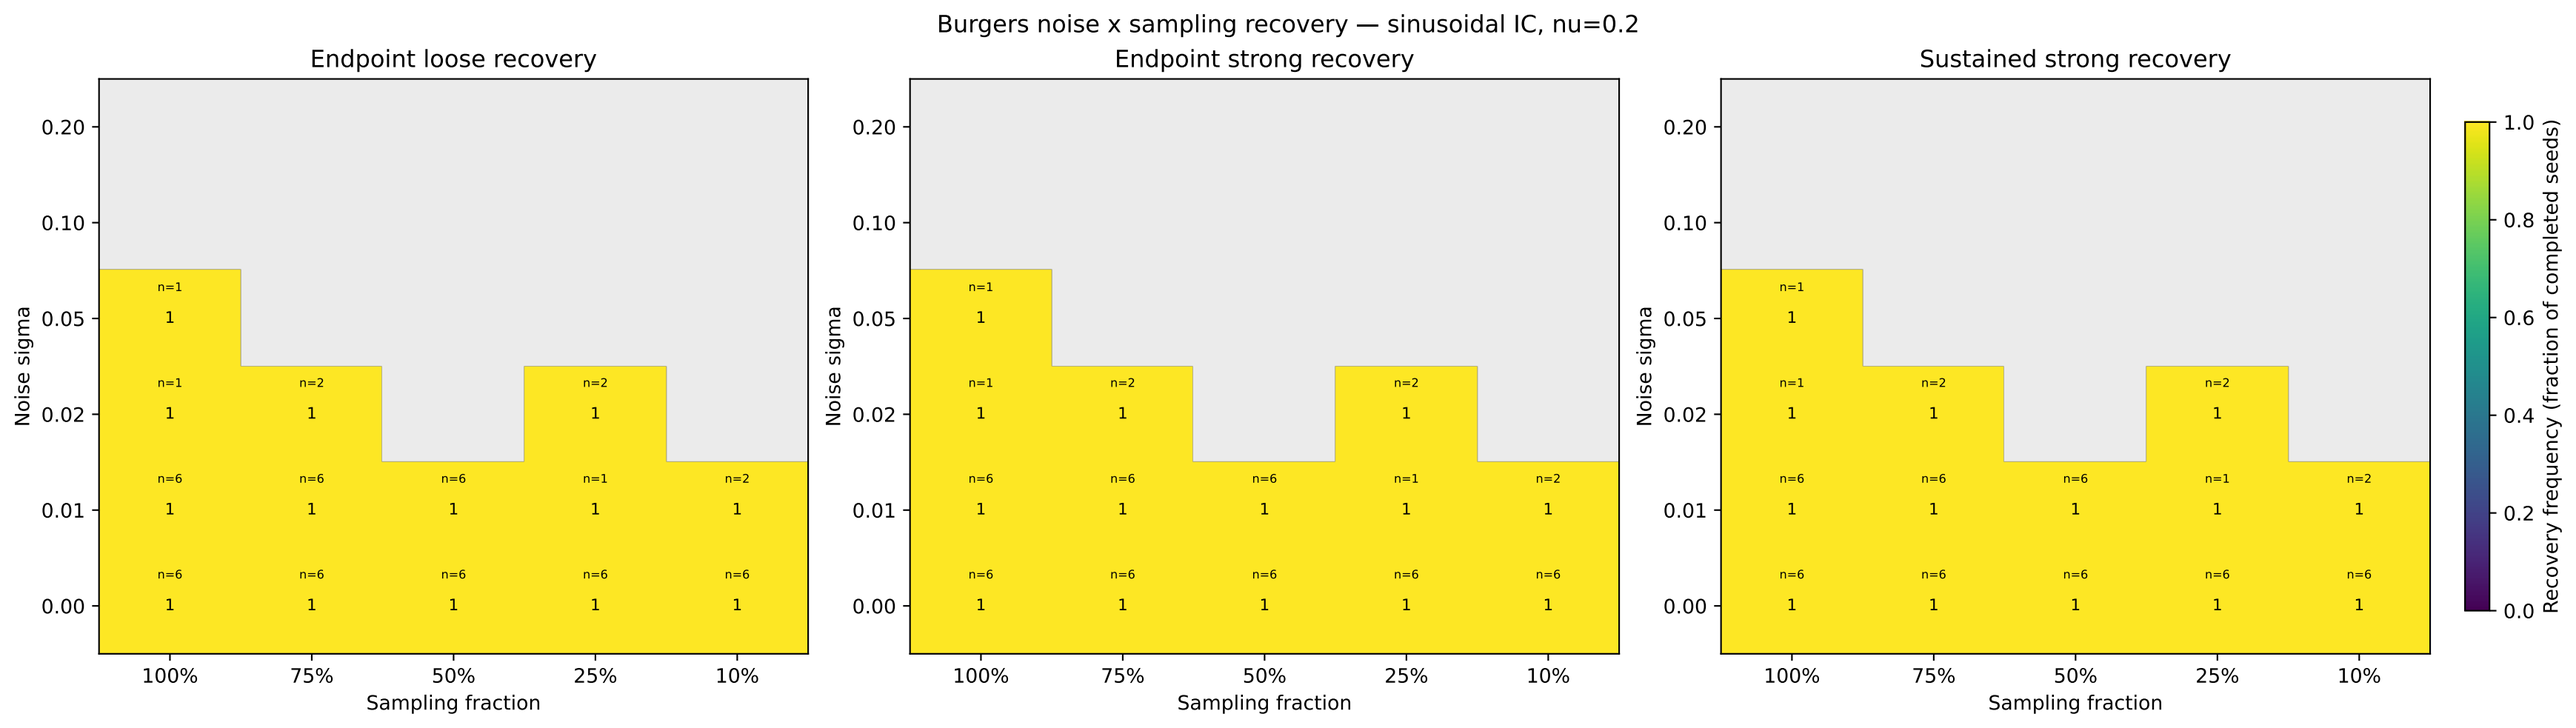
Burgers noise x sampling recovery — sinusoidal IC, nu=0.2
Endpoint loose recovery
Endpoint strong recovery
Sustained strong recovery
Noise sigma
0.20
0.10
0.05
0.02
0.01
0.00
100%
75%
50%
25%
10%
Sampling fraction
n=1
n=2
n=6
1
Recovery frequency (fraction of completed seeds)
0.0
0.2
0.4
0.6
0.8
1.0