

From Particles to Waves

Towards Coupling Dynamic
Snow Modelling and Spectral
Elements to Detect
Avalanche Breakoff in DAS
Data

Salome Bachmann

August 5, 2026



Overview

- Created 3 different models and 2 scenarios for crack propagation in snow using SALVUS
- Two pure spectral element (SE) models, one combined with data from material point method (MPM) simulations
- **Goal:** Couple dynamic snow modelling with SE to model crack propagation in snow

Nomenclature & Abbreviations

- **SE, FE, FEM**: Spectral elements, Finite Element (Method), done in SALVUS
- **MPM**: Material Point Method Numerical Modeling
- **PST**: Propagation Saw Test
- **F-k**: Frequency-Wavenumber Plot
- **DAS**: Distributed Acoustic Sensing (Fibre-Optics)

Why model crack propagation in snow? - Relevance

- 22 fatalities by avalanche in Switzerland every year (SLF, 2025)
- Avalanches are danger for human life but also infrastructure (Schweizer et al., 2003)
- Understanding processes associated with avalanches important
- Avalanche release because of loading, leading to crack propagation in a weak layer (Gaume et al., 2017)

Relevance

- Crack propagation at different speeds: sub-Rayleigh (below v_s of material) and Supershear (above v_s) (Trottet et al., 2022), transition between two regimes possible (Bergfeld et al., 2025)
- Fast crack propagation $\rightarrow$ critical crack length for release (Gaume et al., 2015) is reached faster
- Distributed Acoustic Sensing (DAS) already used to monitor avalanches in Switzerland (Edme et al., 2023; Paitz et al., 2023) and Norway (Turquet et al., 2024)
- No knowledge if crack propagation associated with breakoff can be seen in DAS data

Research Questions

- What FE framework is required to to simulate DAS measurements of crack propagation in snow, and what are the key assumptions and limitations?
- What physical phenomena are observed in a two-layer model with a simple STF and how do they differ for sub-Rayleigh versus Supershear crack propagation?
- To what extent do the results change if source wavelets from a MPM simulation of a propagation saw test (PST) are injected?
- How could the phenomena observed be used to distinguish crack propagation regimes in real-world DAS data and aid in detecting snow slab avalanche breakoff?

Simple Model I

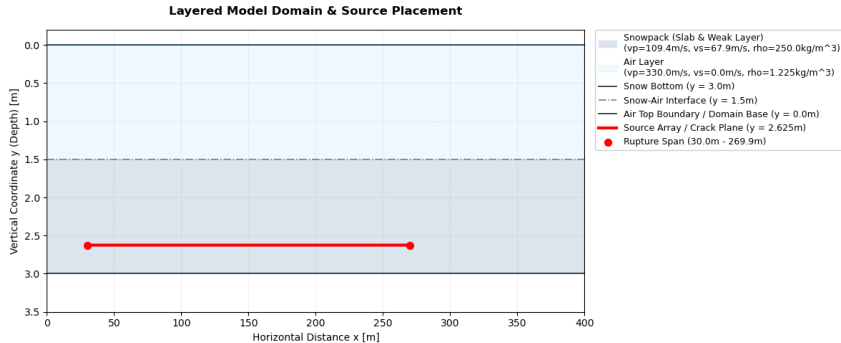


Figure: Two-layer model setup in SALVUS. Colors show materials, material types and properties in legend. Source line extent in red.

Simple Model II

- Set up to test custom STF in SALVUS, see physical effects on output
- Sources spaced over 240m in 10cm intervals
- 20Hz central frequency Ricker wavelet
- Source Wavelet in xx (1), xy (1) and yy (-1) direction
- Time delay of wavelet calculated based on propagation speed: sub-Rayleigh speed is $0.6v_s$, Supershear $1.6v_s$ (Trottet et al., 2022)

MPM-Guided Model I

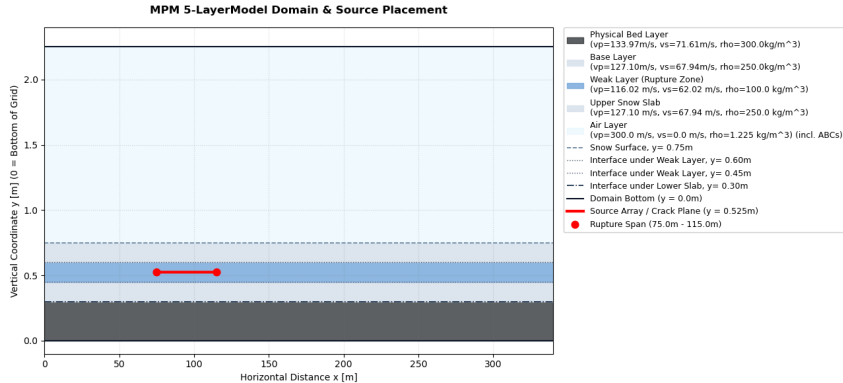


Figure: Five-layer model setup in SALVUS. Colors show materials, material types and properties in legend. Source line extent in red.

MPM-Guided Model II


- Source-time functions obtained from MPM-simulation of PST by Trottet et al., 2022
- Source Wavelet in all three directions, but irregular and different for every source point

Results

- SALVUS Output: Displacement field u
- $\frac{\partial u_i}{\partial t} \rightarrow$ velocity in x and y
- $\frac{\partial u_i}{\partial j} \rightarrow$ strain in x and y ϵ
- $\frac{\partial^2 u_i}{\partial t \partial t} \rightarrow$ strain rate $\dot{\epsilon}$
- Simulation of DAS data from ϵ , $\dot{\epsilon}$ using Pyber Gauge length class by **noeFrontiersFullwaveformSeismology2025**, gauge length according to Turquet et al., 2024
- Spate-time plots of strain, strain rate and velocity at different receiver depths
- Frequency-wavenumber plots with theoretical speeds and dispersion curves
- Animations of velocity wavefields

Simple Sub-Rayleigh: Strain and Strain Rate I

Sub-Rayleigh: Simulated DAS Strain Rate and Strain at $y = 2.625\text{m}$ and $y = 2.25\text{m}$

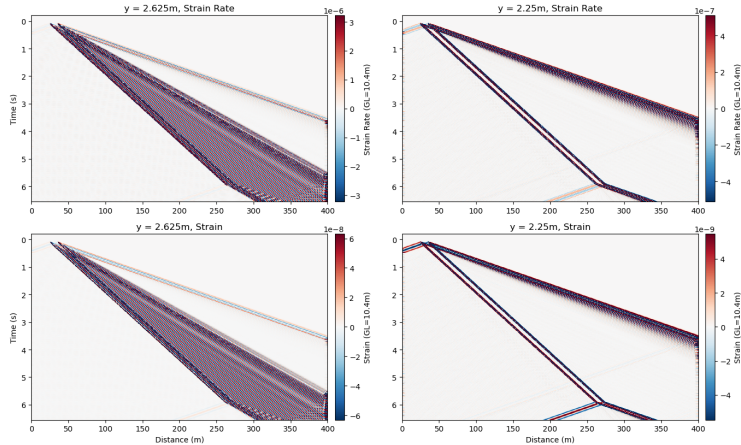

Simple Sub-Rayleigh: Strain and Strain Rate II


Figure: Horizontal Strain and strain rate for sub-Rayleigh crack propagation in simple two-layer model. Plotted at crack depth (2.625m) and at the snow bottom (2.25m). Gauge length is 10.4m.

- Two-wavefront structure
- Main (thicker) wavefront: slope corresponds to prescribed rupture speed
- Second wavefront: coming only from first source
- Wavefront is emitted by all sources but they interfere (**madariagaDynamicsExpandingCircular1976**), as shown by wider source spacing
- Slope of line close to p-wave speed in medium: S0 wave bounded by plate wave speed limit (**roseWavesPlates2014**)
- S0/P-wave precursor observed in field data by **herwijnenSeismicSensorArray2011**
- Oscillatory behavior of both wavefronts (polarity flip at adjacent timesteps)
- At rupture arrest (270m): v-shaped arrest signature: bidirectional, at fastest speed in medium (**freundDynamicFractureMechanics1998**)

Simple Supershear: Strain and Strain Rate I

Simple Supershear: Strain and Strain Rate II

Supershear: Simulated DAS Strain Rate and Strain at $y = 2.625\text{m}$ and $y = 2.25\text{m}$

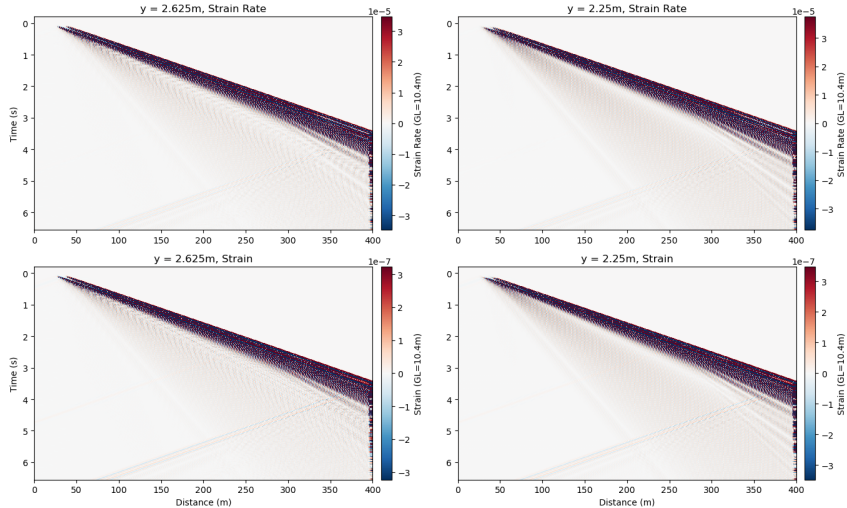

MPM-Guided: Strain and Strain Rate I

Simple model: Lamb Wave Identification I

MPM-Guided Model: Lamb Wave Identification I

Summary of Results & Discussion I

Implications for DAS field data I

Outlook

Answer to Research Questions - Conclusions

Questions?

Bibliography I



Bergfeld, B., Gaume, J., Bobillier, G., Pellet, A., Schweizer, J., & van Herwijnen, A. (2025). Signatures of the sub-Rayleigh to supershear fracture transition in snow avalanche experiments. *Nature Communications*, 16(1), 11153.
<https://doi.org/10.1038/s41467-025-65825-6>



Edme, P., Paitz, P., Walter, F., van Herwijnen, A., & Fichtner, A. (2023, February). Fiber-optic detection of snow avalanches using telecommunication infrastructure.
<https://doi.org/10.48550/arXiv.2302.12649>



Gaume, J., van Herwijnen, A., Chambon, G., Birkeland, K. W., & Schweizer, J. (2015). Modeling of crack propagation in weak snowpack layers using the discrete element method. *The Cryosphere*, 9(5), 1915–1932.
<https://doi.org/10.5194/tc-9-1915-2015>

Bibliography II



Gaume, J., van Herwijnen, A., Chambon, G., Wever, N., & Schweizer, J. (2017). Snow fracture in relation to slab avalanche release: Critical state for the onset of crack propagation. *The Cryosphere*, 11(1), 217–228.
<https://doi.org/10.5194/tc-11-217-2017>



Paitz, P., Lindner, N., Edme, P., Huguenin, P., Hohl, M., Sovilla, B., Walter, F., & Fichtner, A. (2023). Phenomenology of Avalanche Recordings From Distributed Acoustic Sensing. *Journal of Geophysical Research: Earth Surface*, 128(5), e2022JF007011. <https://doi.org/10.1029/2022JF007011>



Schweizer, J., Bruce Jamieson, J., & Schneebeli, M. (2003). Snow avalanche formation. *Reviews of Geophysics*, 41(4). <https://doi.org/10.1029/2002RG000123>



SLF. (2025). Avalanche Victims since 1936 - Long Term Statistics.

Bibliography III




Trottet, B., Simenhois, R., Bobillier, G., Bergfeld, B., van Herwijnen, A., Jiang, C., & Gaume, J. (2022). Transition from sub-Rayleigh anticrack to supershear crack propagation in snow avalanches. *Nature Physics*, 18(9), 1094–1098.
<https://doi.org/10.1038/s41567-022-01662-4>



Turquet, A., Wuestefeld, A., Svendsen, G. K., Nyhammer, F. K., Nilsen, E. L., Persson, A. P.-O., & Refsum, V. (2024). Automated Snow Avalanche Monitoring and Alert System Using Distributed Acoustic Sensing in Norway. *GeoHazards*, 5(4), 1326–1345. <https://doi.org/10.3390/geohazards5040063>

MPM STF Workflow

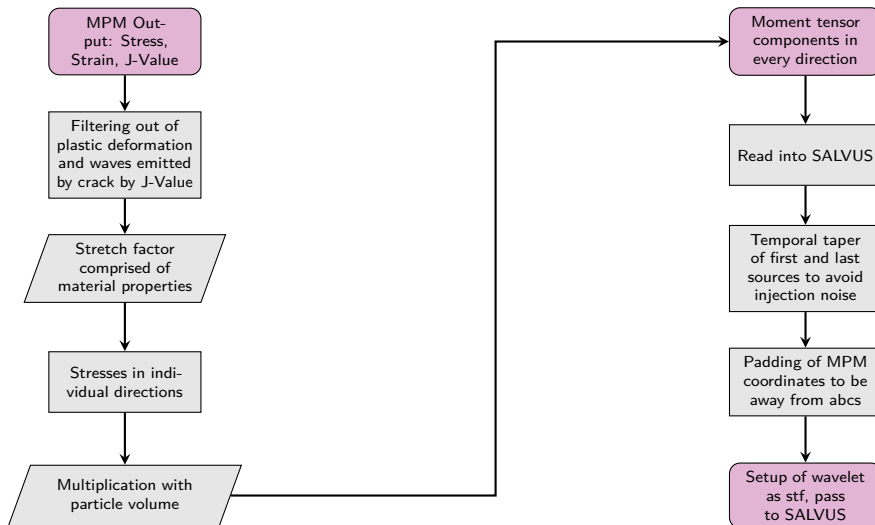



Salome Bachmann
Master Student
sbachmann@student.ethz.ch

ETH Zurich
D-EAPS