


Meeting 4

Salome Bachmann

April 28, 2026

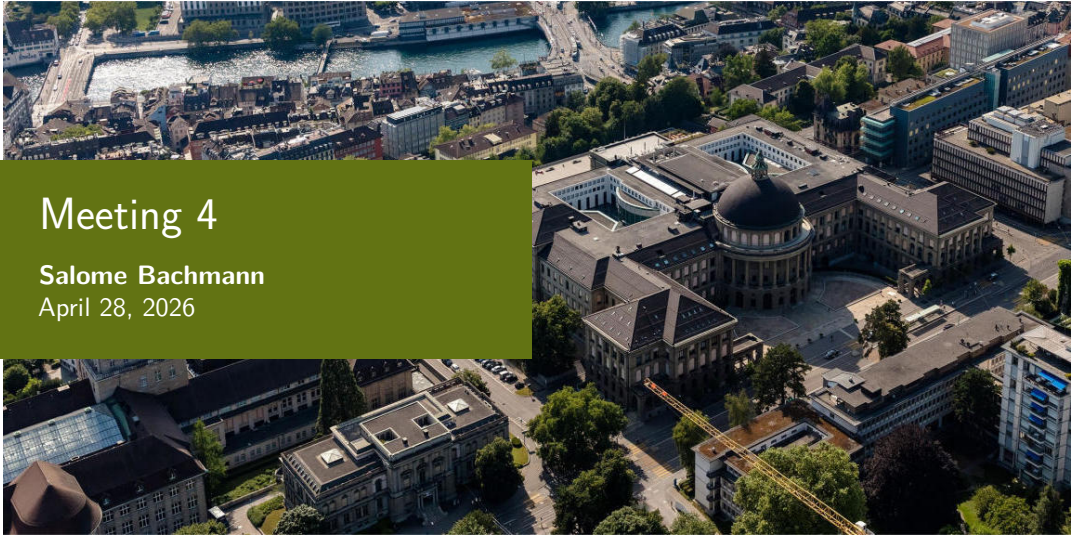


Overview: Todos of last Meeting

- Compare pcolormesh to imshow in plots
- Plot x and y components of space-time plots
- Source-time function in x and y
- Wiggle plots of traces
- Run supershear simulation to check if it's different from sub-Rayleigh
- Make domain bigger but keep simulation time to get rid of ABC effects
- Summary of crack types

Summary of Model

- Implemented cohesive zone model described by Mahajan and Joshi, 2008
- Implemented functions described by Mahajan and Joshi, 2008
- Accounts for cohesive zone (weak layer)
- Focuses primarily on mode II cracks
- Two-layered model: snow and air
- Fault mechanism: 10Hz moment tensor sources
- Forces of sources are computed by using a fraction of crack modes: eg m_{xy} is calculated by total force times fraction of mode II
- Sources every 2m

Velocity(v_x): horizontal component - receiver at s

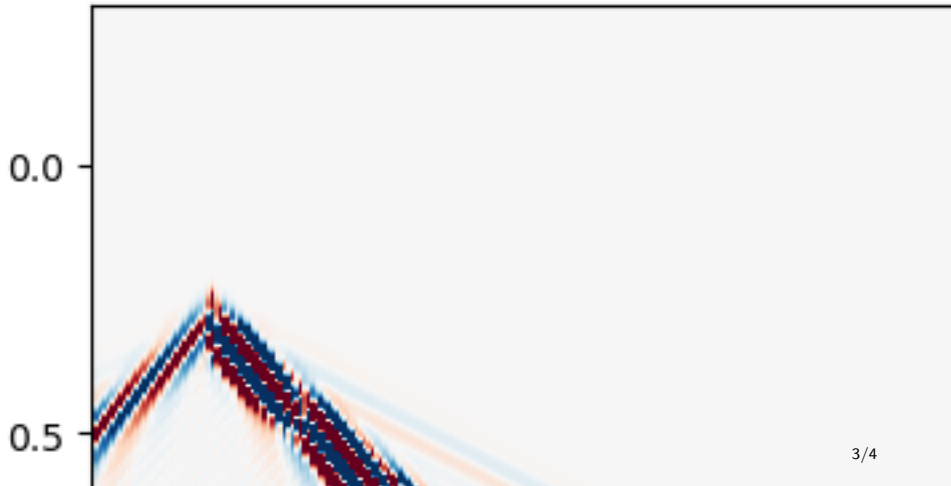

Bibliography I



Mahajan, P., & Joshi, S. K. (2008). Modeling of interfacial crack velocities in snow. *Cold Regions Science and Technology*, 51(2), 98–111.
<https://doi.org/10.1016/j.coldregions.2007.05.008> 



Salome Bachmann
Master Student
sbachmann@student.ethz.ch

ETH Zurich
D-EAPS