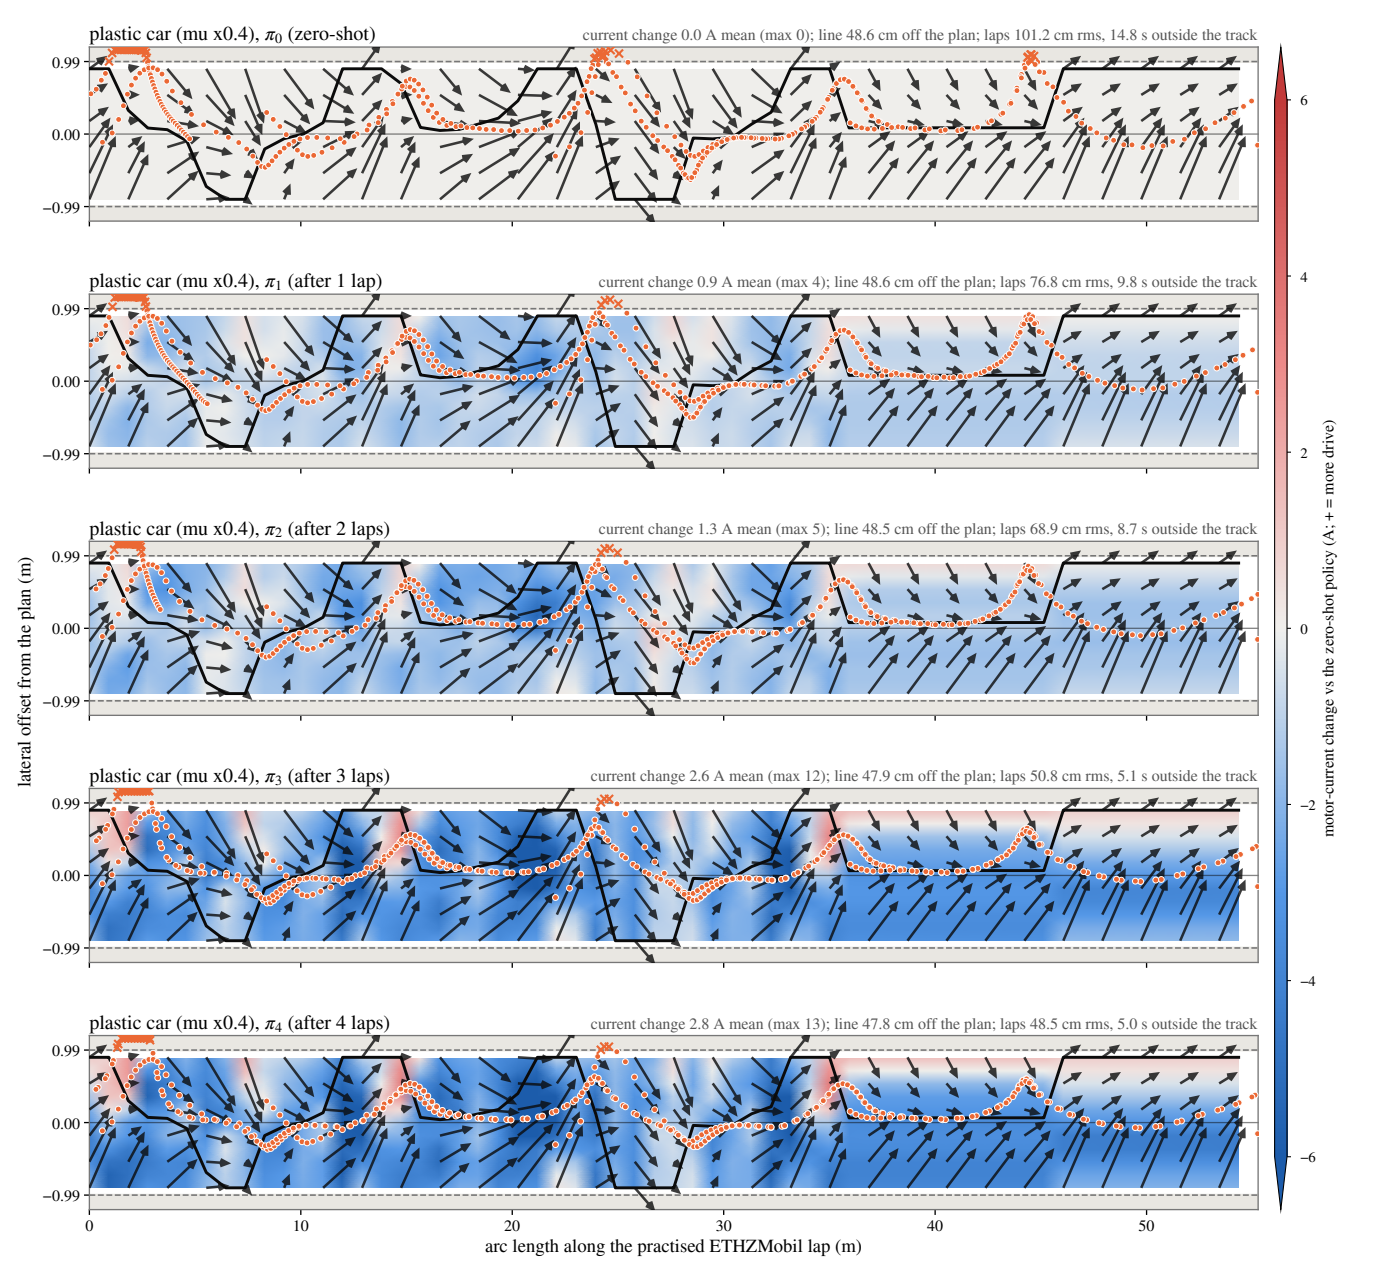

plastic car (mu x0.4), π_0 (zero-shot)
current change 0.0 A mean (max 0); line 48.6 cm off the plan; laps 101.2 cm rms, 14.8 s outside the track
plastic car (mu x0.4), π_1 (after 1 lap)
current change 0.9 A mean (max 4); line 48.6 cm off the plan; laps 76.8 cm rms, 9.8 s outside the track
plastic car (mu x0.4), π_2 (after 2 laps)
current change 1.3 A mean (max 5); line 48.5 cm off the plan; laps 68.9 cm rms, 8.7 s outside the track
plastic car (mu x0.4), π_3 (after 3 laps)
current change 2.6 A mean (max 12); line 47.9 cm off the plan; laps 50.8 cm rms, 5.1 s outside the track
plastic car (mu x0.4), π_4 (after 4 laps)
current change 2.8 A mean (max 13); line 47.8 cm off the plan; laps 48.5 cm rms, 5.0 s outside the track
0.99
0.00
−0.99
lateral offset from the plan (m)
0
10
20
30
40
50
arc length along the practised ETHZMobil lap (m)
6
4
2
0
−2
−4
−6
motor-current change vs the zero-shot policy (A; + = more drive)
track edges (+-0.99 m)
4 laterally perturbed starts, every 0.2 s
outside the track (at the frame edge)
where the push is zero
where the car is 1.0 s later