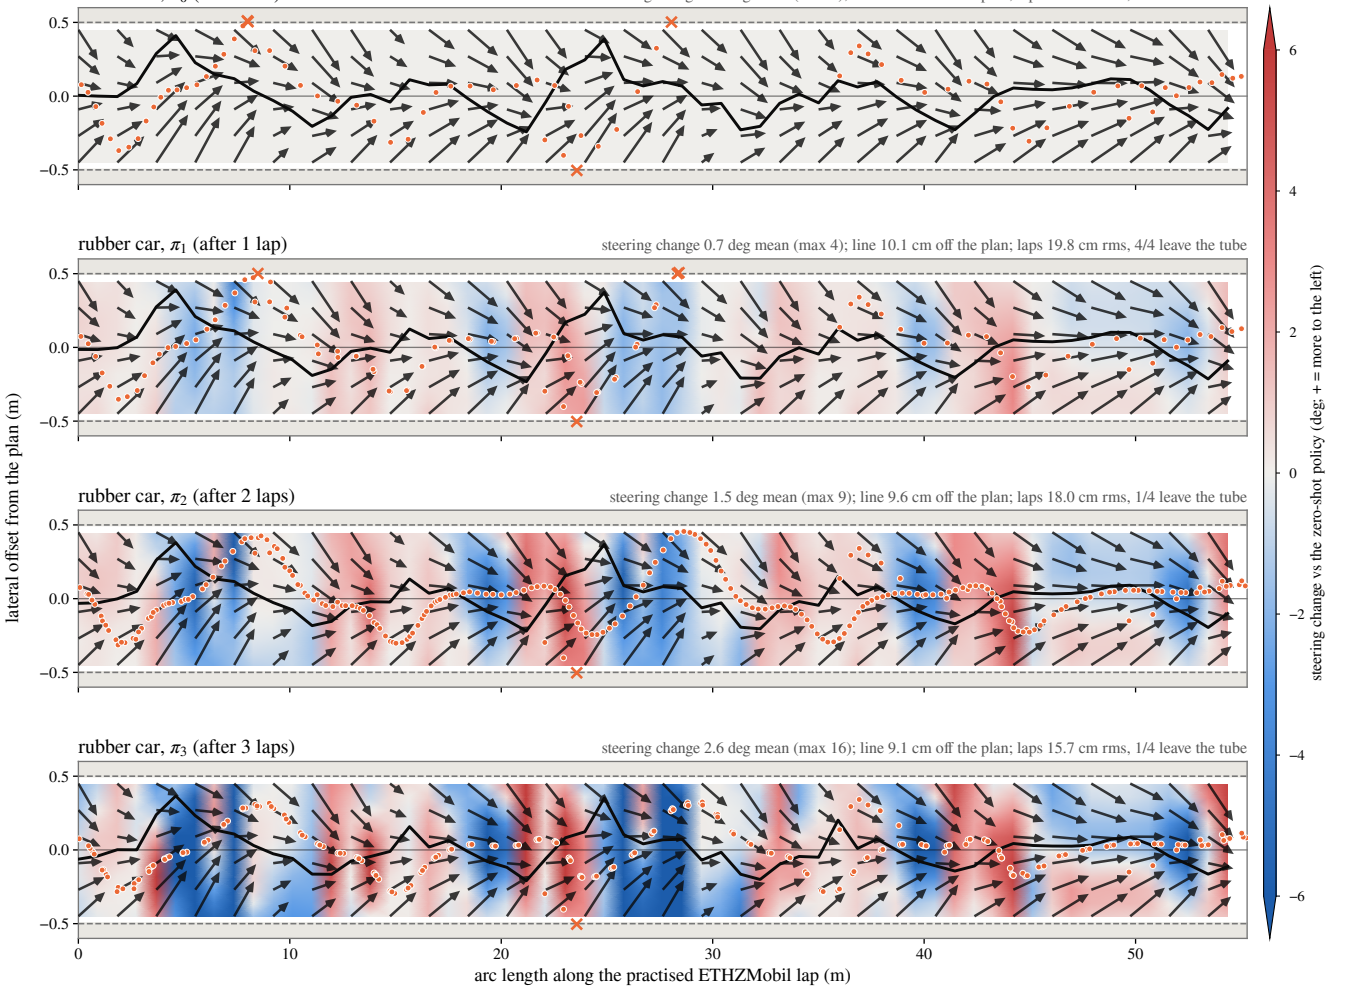

rubber car, π_0 (zero-shot)
steering change 0.0 deg mean (max 0); line 10.7 cm off the plan; laps 21.5 cm rms, 4/4 leave the tube
rubber car, π_1 (after 1 lap)
steering change 0.7 deg mean (max 4); line 10.1 cm off the plan; laps 19.8 cm rms, 4/4 leave the tube
rubber car, π_2 (after 2 laps)
steering change 1.5 deg mean (max 9); line 9.6 cm off the plan; laps 18.0 cm rms, 1/4 leave the tube
rubber car, π_3 (after 3 laps)
steering change 2.6 deg mean (max 16); line 9.1 cm off the plan; laps 15.7 cm rms, 1/4 leave the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
10
20
30
40
50
arc length along the practised ETHZMobil lap (m)
steering change vs the zero-shot policy (deg; + = more to the left)
6
4
2
0
−2
−4
−6
0.5 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the push is zero
where the car is 1.0 s later