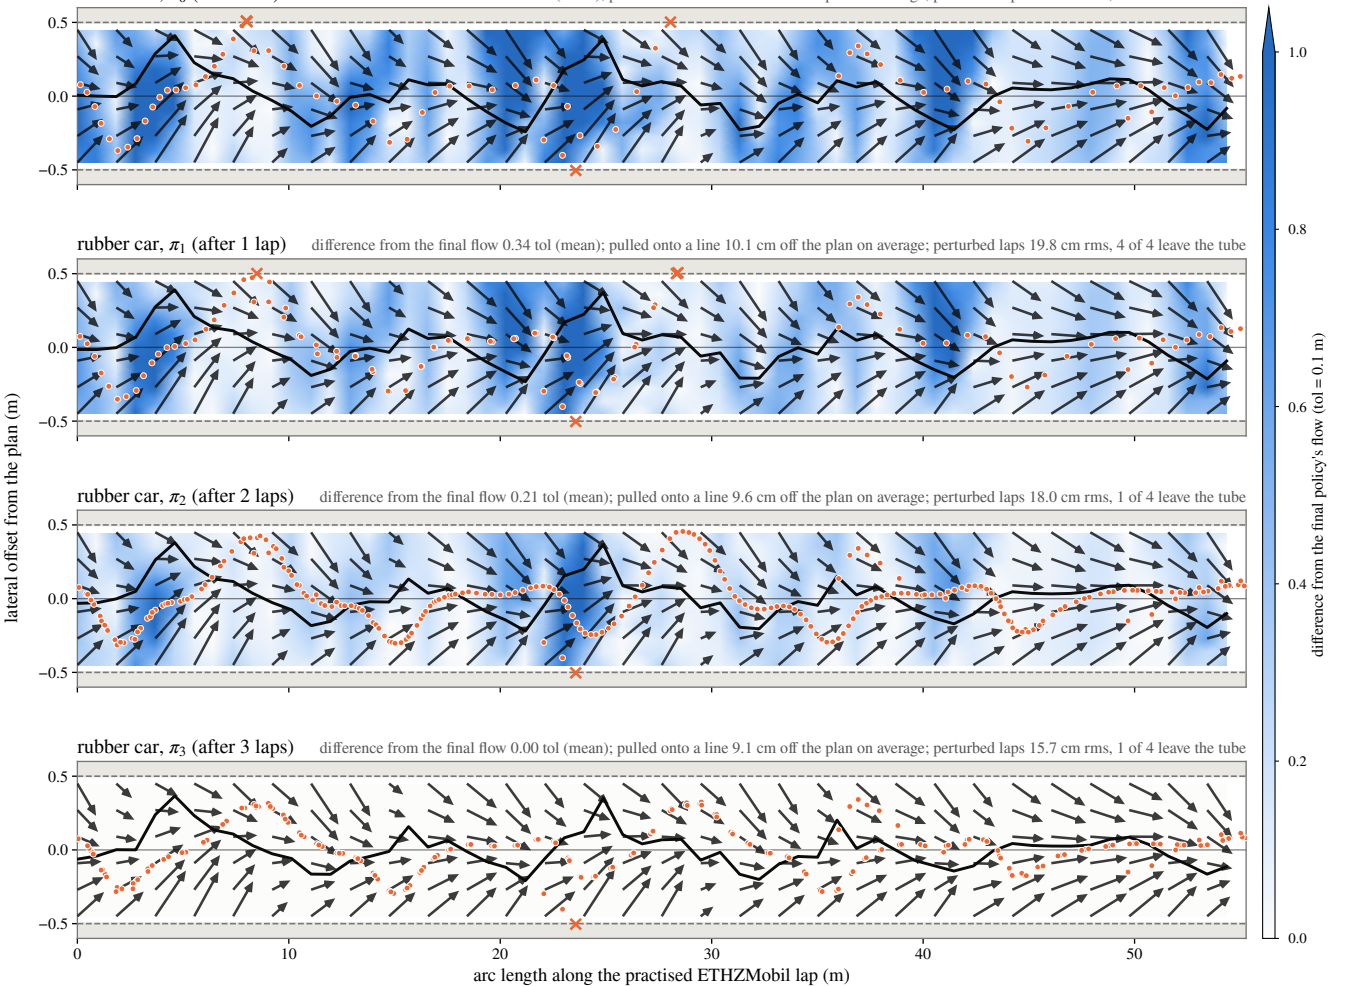

rubber car, π_0 (zero-shot)
difference from the final flow 0.47 tol (mean); pulled onto a line 10.7 cm off the plan on average; perturbed laps 21.5 cm rms, 4 of 4 leave the tube
rubber car, π_1 (after 1 lap)
difference from the final flow 0.34 tol (mean); pulled onto a line 10.1 cm off the plan on average; perturbed laps 19.8 cm rms, 4 of 4 leave the tube
rubber car, π_2 (after 2 laps)
difference from the final flow 0.21 tol (mean); pulled onto a line 9.6 cm off the plan on average; perturbed laps 18.0 cm rms, 1 of 4 leave the tube
rubber car, π_3 (after 3 laps)
difference from the final flow 0.00 tol (mean); pulled onto a line 9.1 cm off the plan on average; perturbed laps 15.7 cm rms, 1 of 4 leave the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
10
20
30
40
50
arc length along the practised ETHZMobil lap (m)
difference from the final policy's flow (tol = 0.1 m)
0.0
0.2
0.4
0.6
0.8
1.0
0.5 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the push is zero
where the car is 1.0 s later