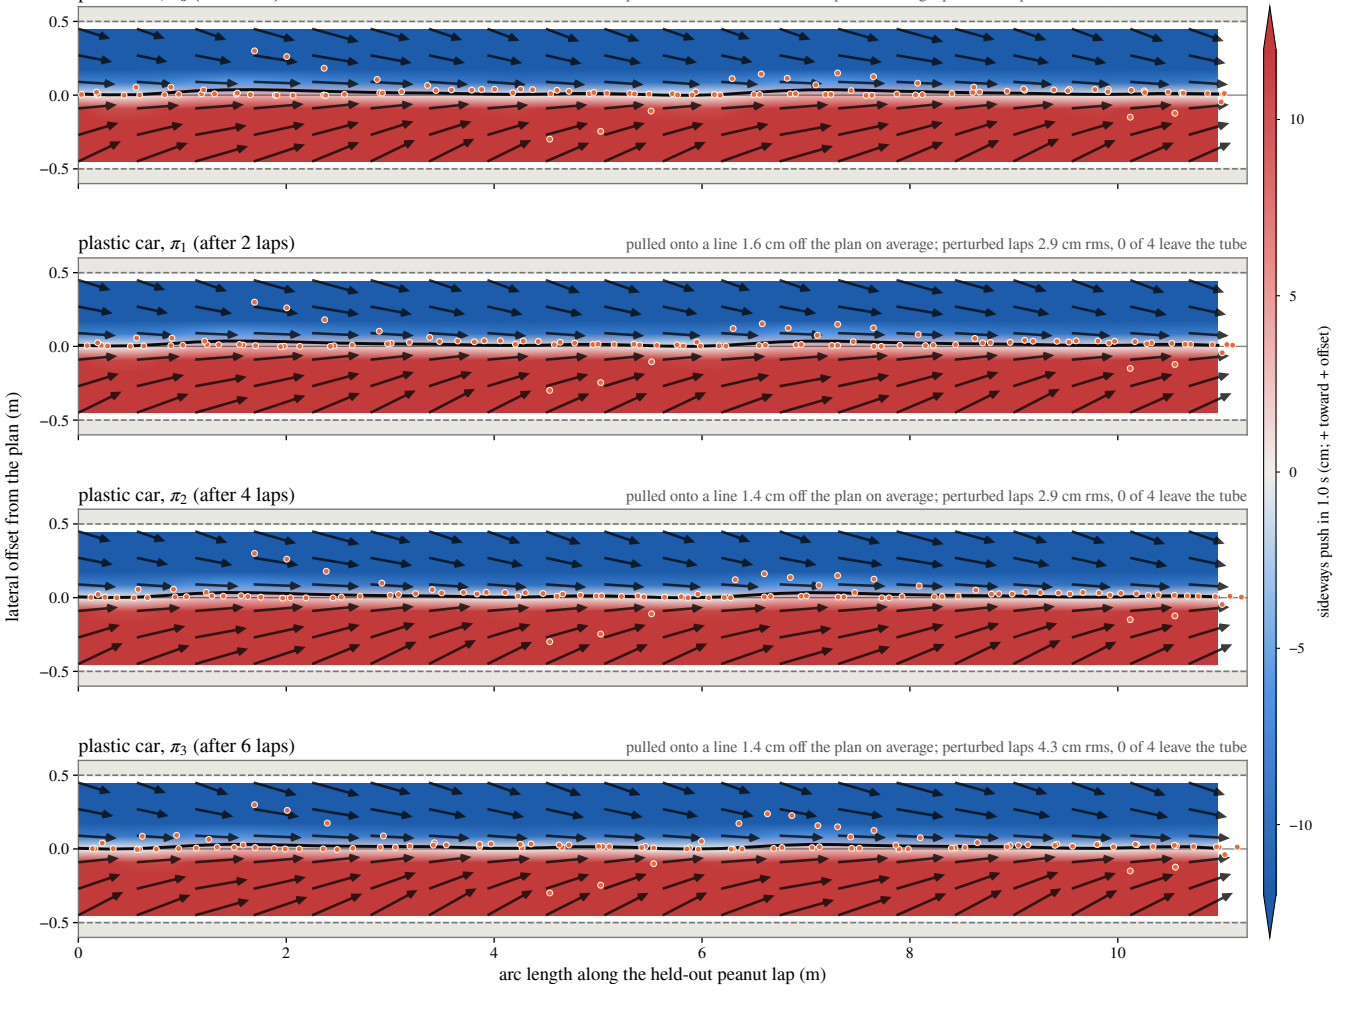

plastic car, π_0 (zero-shot)
pulled onto a line 1.6 cm off the plan on average; perturbed laps 2.7 cm rms, 0 of 4 leave the tube
plastic car, π_1 (after 2 laps)
pulled onto a line 1.6 cm off the plan on average; perturbed laps 2.9 cm rms, 0 of 4 leave the tube
plastic car, π_2 (after 4 laps)
pulled onto a line 1.4 cm off the plan on average; perturbed laps 2.9 cm rms, 0 of 4 leave the tube
plastic car, π_3 (after 6 laps)
pulled onto a line 1.4 cm off the plan on average; perturbed laps 4.3 cm rms, 0 of 4 leave the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
arc length along the held-out peanut lap (m)
sideways push in 1.0 s (cm; + toward + offset)
10
5
0
−5
−10
0.5 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the push is zero
where the car is 1.0 s later