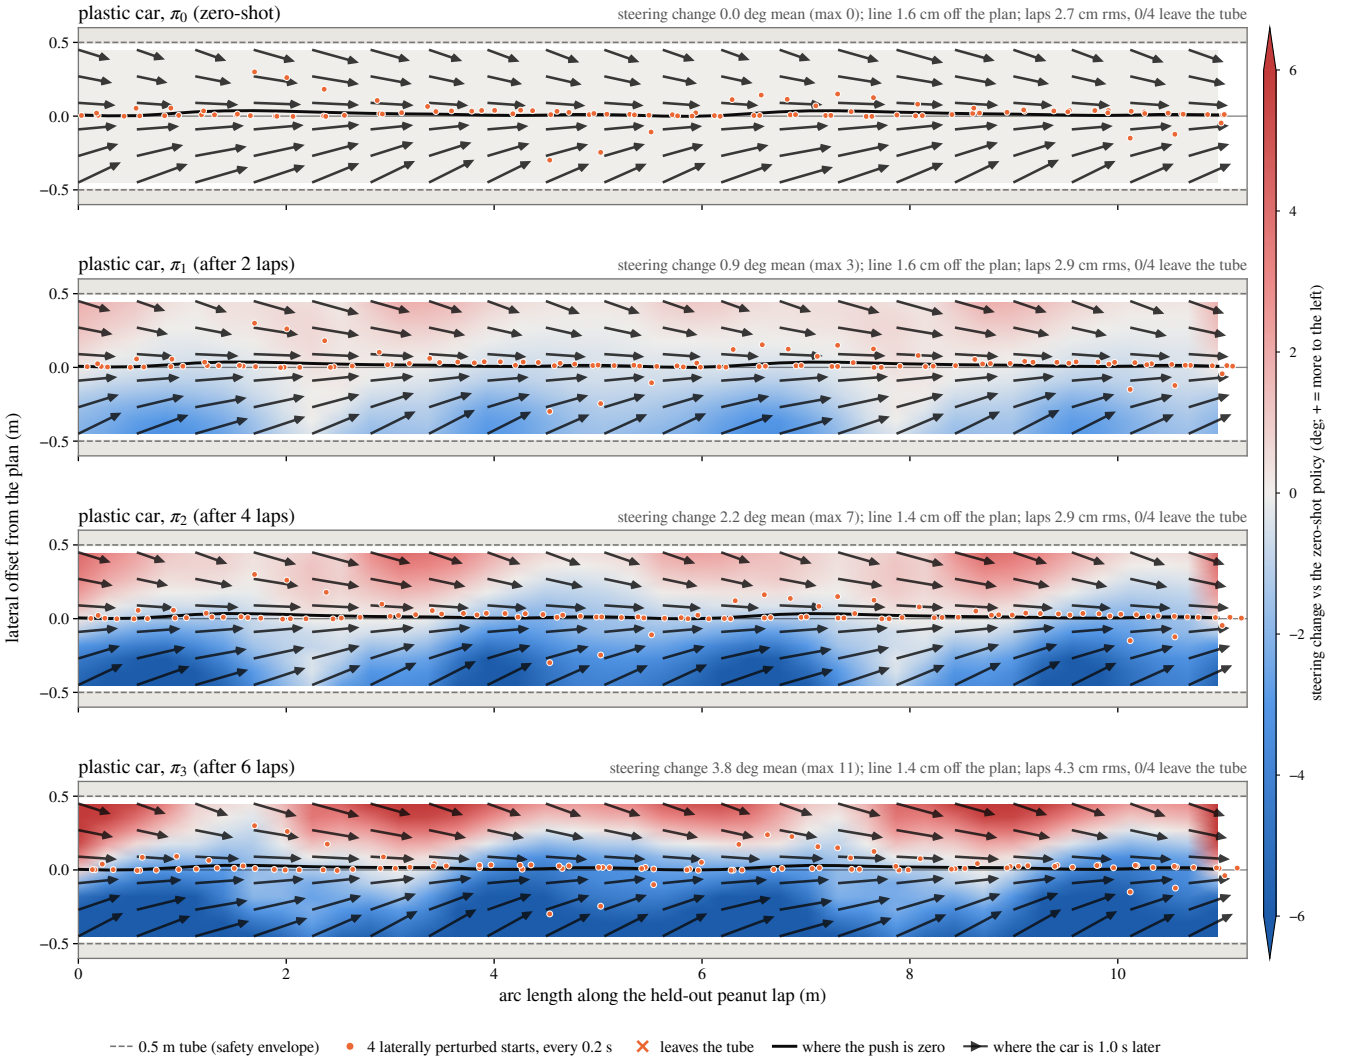

plastic car, π_0 (zero-shot)
steering change 0.0 deg mean (max 0); line 1.6 cm off the plan; laps 2.7 cm rms, 0/4 leave the tube
plastic car, π_1 (after 2 laps)
steering change 0.9 deg mean (max 3); line 1.6 cm off the plan; laps 2.9 cm rms, 0/4 leave the tube
plastic car, π_2 (after 4 laps)
steering change 2.2 deg mean (max 7); line 1.4 cm off the plan; laps 2.9 cm rms, 0/4 leave the tube
plastic car, π_3 (after 6 laps)
steering change 3.8 deg mean (max 11); line 1.4 cm off the plan; laps 4.3 cm rms, 0/4 leave the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
arc length along the held-out peanut lap (m)
steering change vs the zero-shot policy (deg; + = more to the left)
6
4
2
0
−2
−4
−6
0.5 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the push is zero
where the car is 1.0 s later