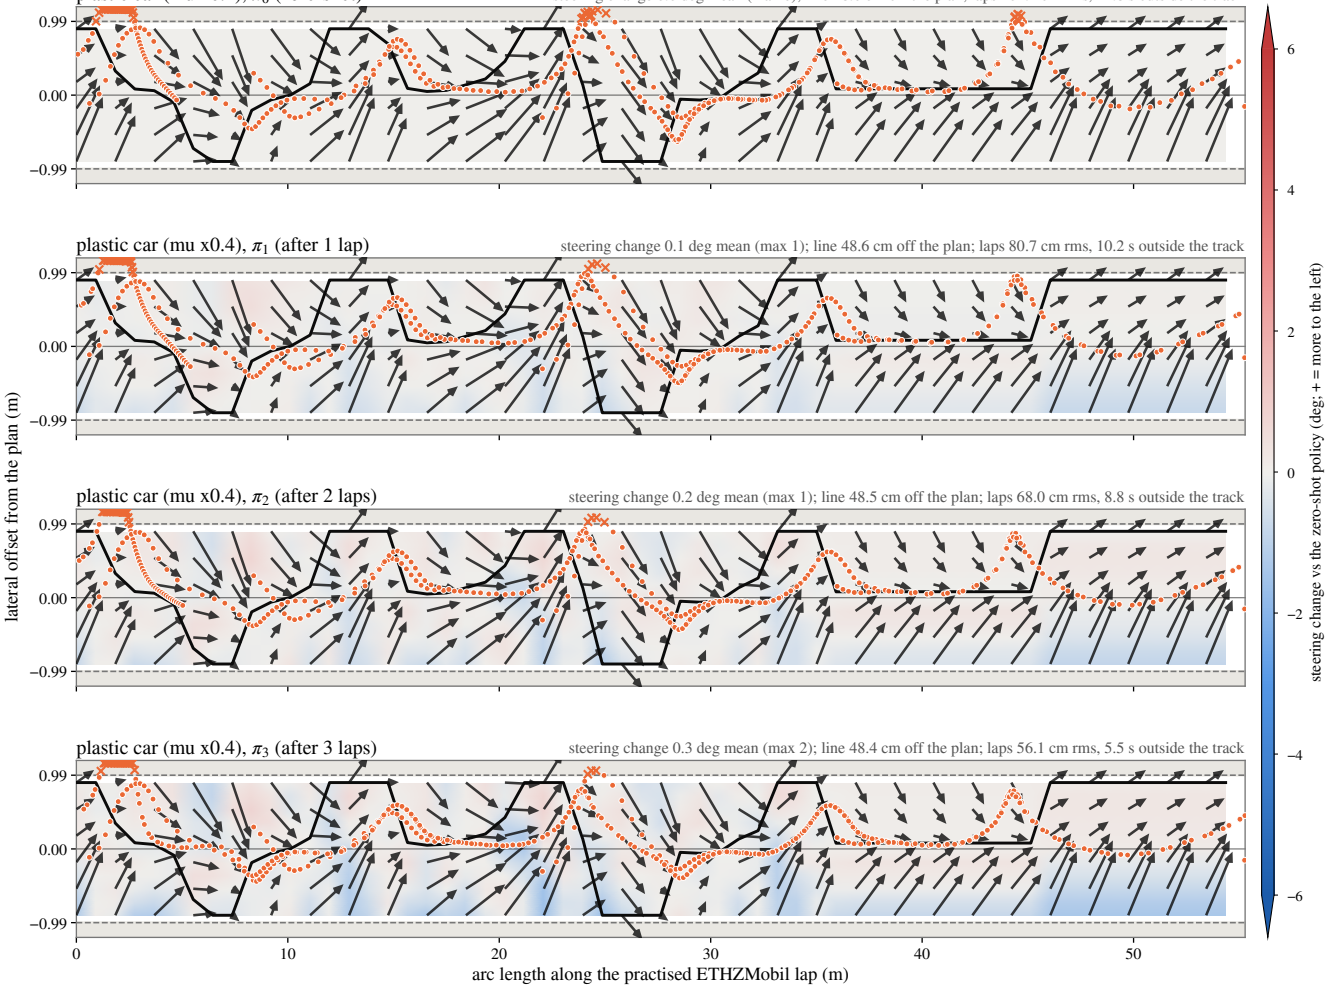

plastic car (mu x0.4), π_0 (zero-shot)
steering change 0.0 deg mean (max 0); line 48.6 cm off the plan; laps 101.2 cm rms, 14.8 s outside the track
plastic car (mu x0.4), π_1 (after 1 lap)
steering change 0.1 deg mean (max 1); line 48.6 cm off the plan; laps 80.7 cm rms, 10.2 s outside the track
plastic car (mu x0.4), π_2 (after 2 laps)
steering change 0.2 deg mean (max 1); line 48.5 cm off the plan; laps 68.0 cm rms, 8.8 s outside the track
plastic car (mu x0.4), π_3 (after 3 laps)
steering change 0.3 deg mean (max 2); line 48.4 cm off the plan; laps 56.1 cm rms, 5.5 s outside the track
lateral offset from the plan (m)
0.99
0.00
−0.99
0
10
20
30
40
50
arc length along the practised ETHZMobil lap (m)
steering change vs the zero-shot policy (deg; + = more to the left)
6
4
2
0
−2
−4
−6
track edges (+-0.99 m)
4 laterally perturbed starts, every 0.2 s
outside the track (at the frame edge)
where the push is zero
where the car is 1.0 s later