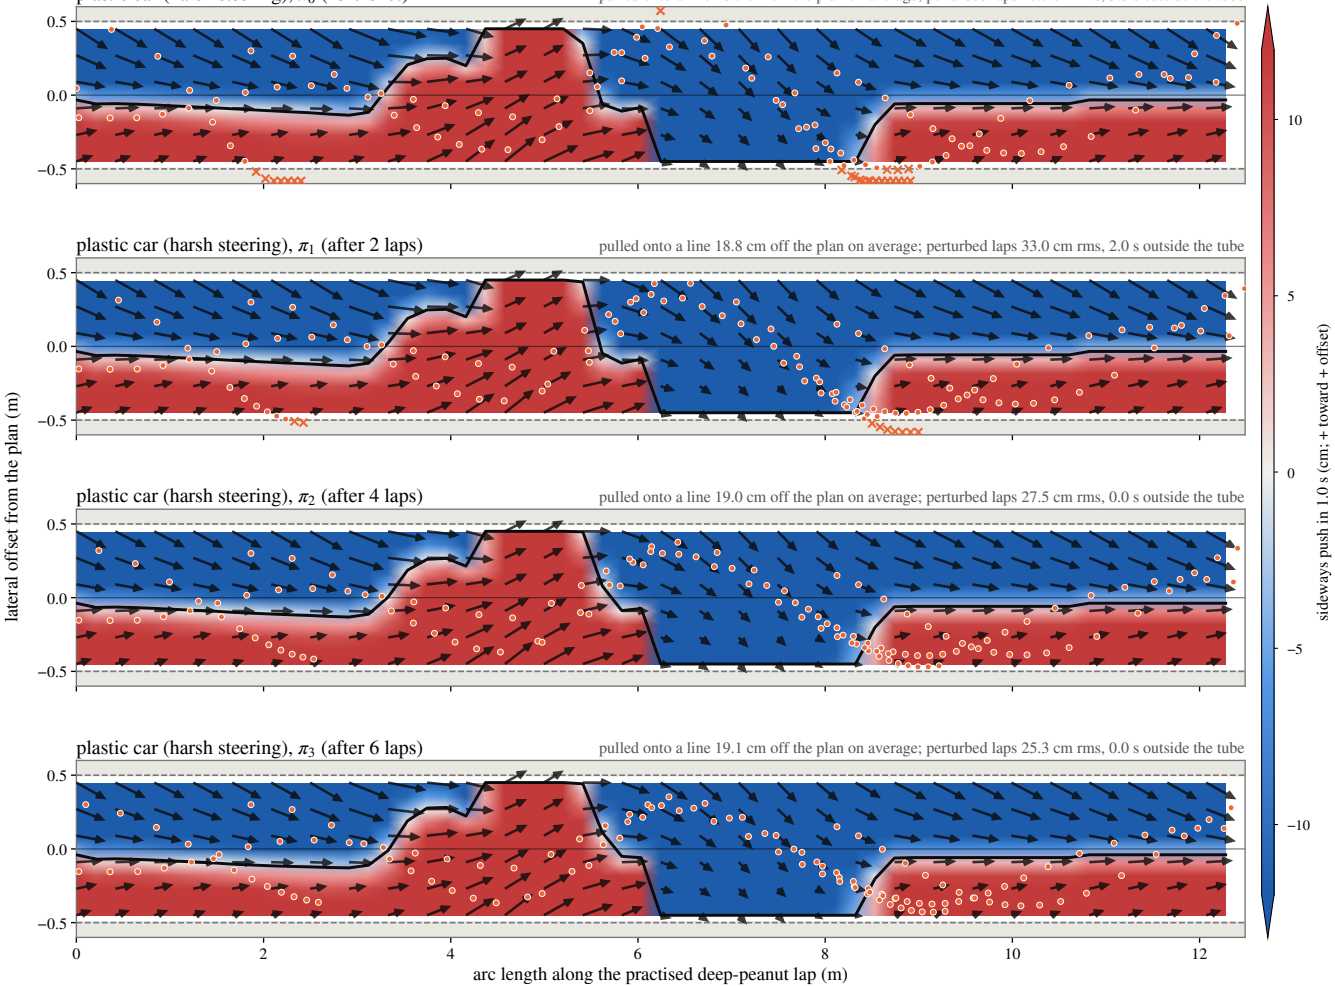

plastic car (harsh steering), π_0 (zero-shot)
pulled onto a line 18.7 cm off the plan on average; perturbed laps 40.7 cm rms, 5.5 s outside the tube
plastic car (harsh steering), π_1 (after 2 laps)
pulled onto a line 18.8 cm off the plan on average; perturbed laps 33.0 cm rms, 2.0 s outside the tube
plastic car (harsh steering), π_2 (after 4 laps)
pulled onto a line 19.0 cm off the plan on average; perturbed laps 27.5 cm rms, 0.0 s outside the tube
plastic car (harsh steering), π_3 (after 6 laps)
pulled onto a line 19.1 cm off the plan on average; perturbed laps 25.3 cm rms, 0.0 s outside the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
12
arc length along the practised deep-peanut lap (m)
sideways push in 1.0 s (cm; + toward + offset)
10
5
0
−5
−10
0.50 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
outside the tube (at the frame edge)
where the push is zero
where the car is 1.0 s later