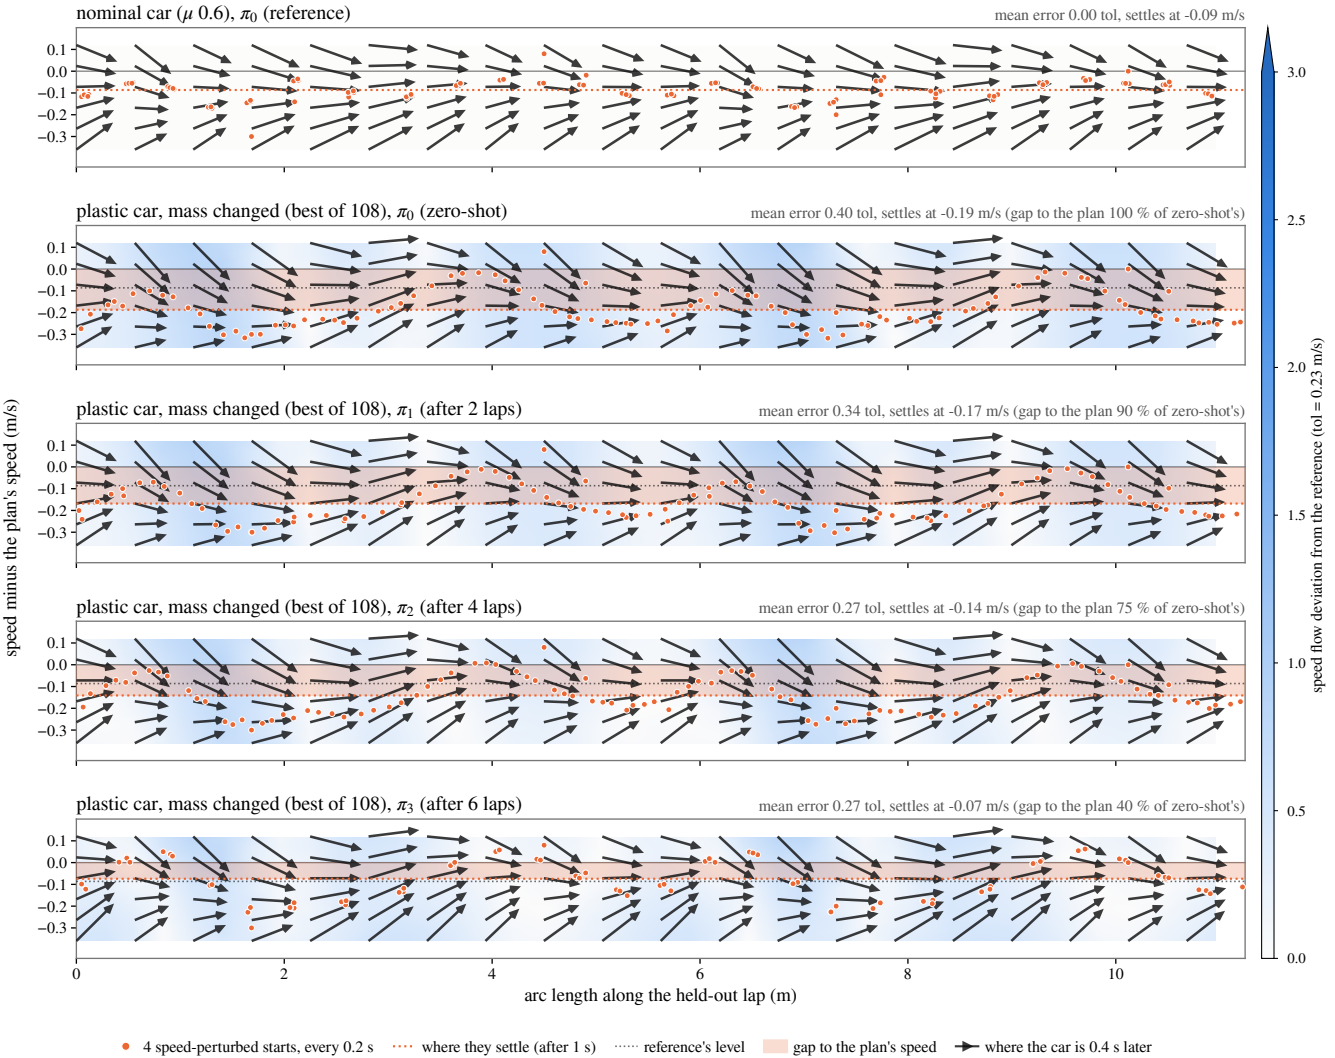

nominal car (μ 0.6), π0 (reference)
mean error 0.00 tol, settles at -0.09 m/s
plastic car, mass changed (best of 108), π0 (zero-shot)
mean error 0.40 tol, settles at -0.19 m/s (gap to the plan 100 % of zero-shot's)
plastic car, mass changed (best of 108), π1 (after 2 laps)
mean error 0.34 tol, settles at -0.17 m/s (gap to the plan 90 % of zero-shot's)
plastic car, mass changed (best of 108), π2 (after 4 laps)
mean error 0.27 tol, settles at -0.14 m/s (gap to the plan 75 % of zero-shot's)
plastic car, mass changed (best of 108), π3 (after 6 laps)
mean error 0.27 tol, settles at -0.07 m/s (gap to the plan 40 % of zero-shot's)
speed minus the plan's speed (m/s)
0.1
0.0
−0.1
−0.2
−0.3
0
2
4
6
8
10
arc length along the held-out lap (m)
speed flow deviation from the reference (tol = 0.23 m/s)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
4 speed-perturbed starts, every 0.2 s
where they settle (after 1 s)
reference's level
gap to the plan's speed
where the car is 0.4 s later