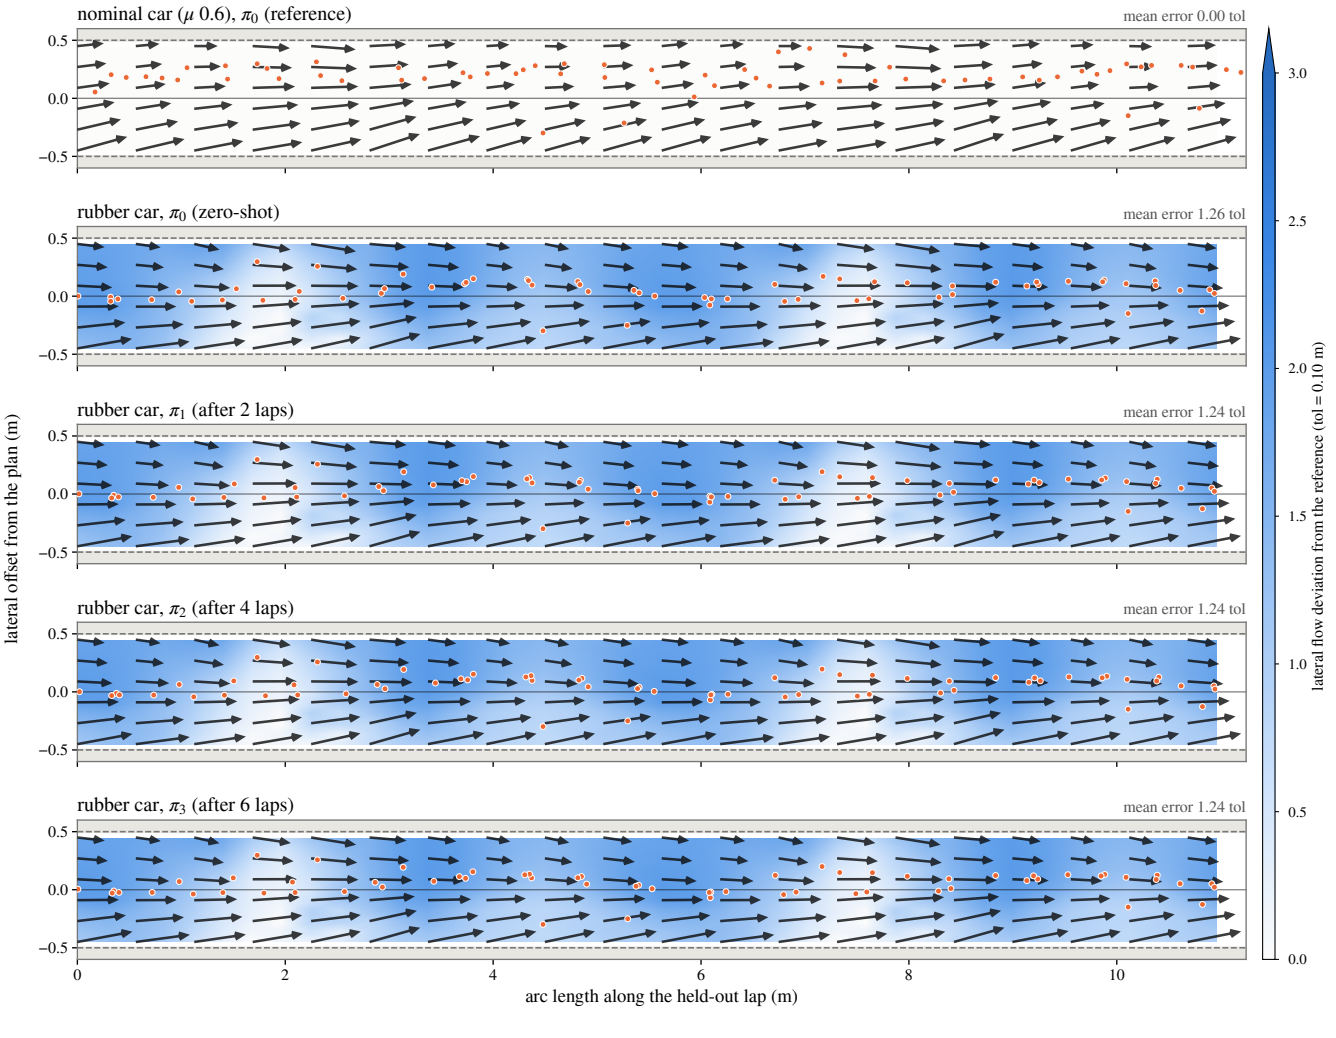

nominal car (μ 0.6), π_0 (reference)
mean error 0.00 tol
rubber car, π_0 (zero-shot)
mean error 1.26 tol
rubber car, π_1 (after 2 laps)
mean error 1.24 tol
rubber car, π_2 (after 4 laps)
mean error 1.24 tol
rubber car, π_3 (after 6 laps)
mean error 1.24 tol
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
arc length along the held-out lap (m)
lateral flow deviation from the reference (tol = 0.10 m)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
0.5 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the car is 0.4 s later