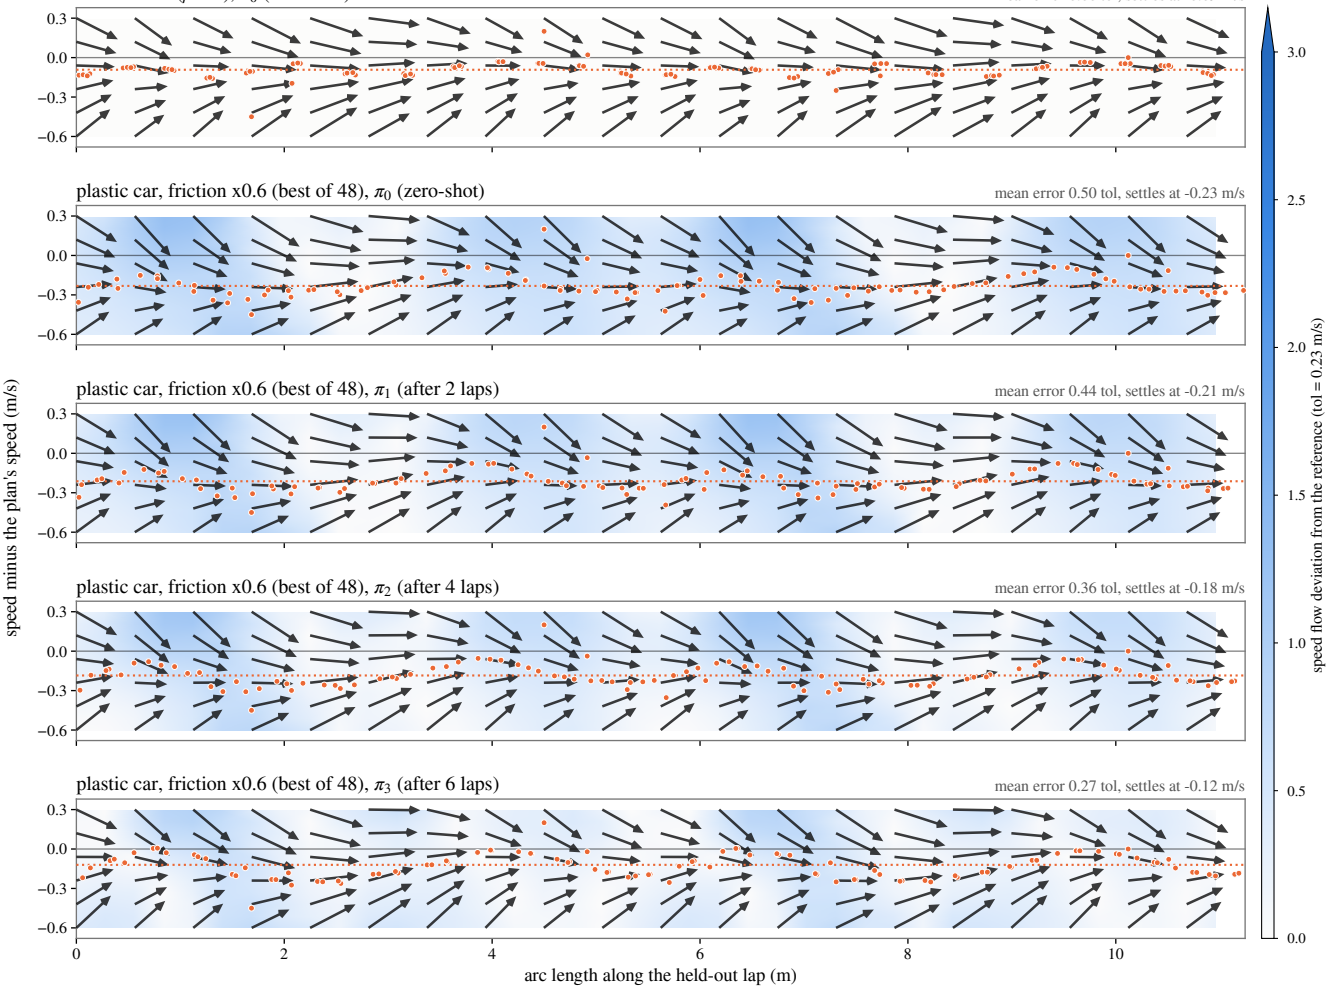

nominal car (μ 0.6), π0 (reference)
mean error 0.00 tol, settles at -0.09 m/s
plastic car, friction x0.6 (best of 48), π0 (zero-shot)
mean error 0.50 tol, settles at -0.23 m/s
plastic car, friction x0.6 (best of 48), π1 (after 2 laps)
mean error 0.44 tol, settles at -0.21 m/s
plastic car, friction x0.6 (best of 48), π2 (after 4 laps)
mean error 0.36 tol, settles at -0.18 m/s
plastic car, friction x0.6 (best of 48), π3 (after 6 laps)
mean error 0.27 tol, settles at -0.12 m/s
speed minus the plan's speed (m/s)
0.3
0.0
−0.3
−0.6
0
2
4
6
8
10
arc length along the held-out lap (m)
speed flow deviation from the reference (tol = 0.23 m/s)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
4 speed-perturbed starts, every 0.2 s
where they settle (after 1 s)
where the car is 0.4 s later