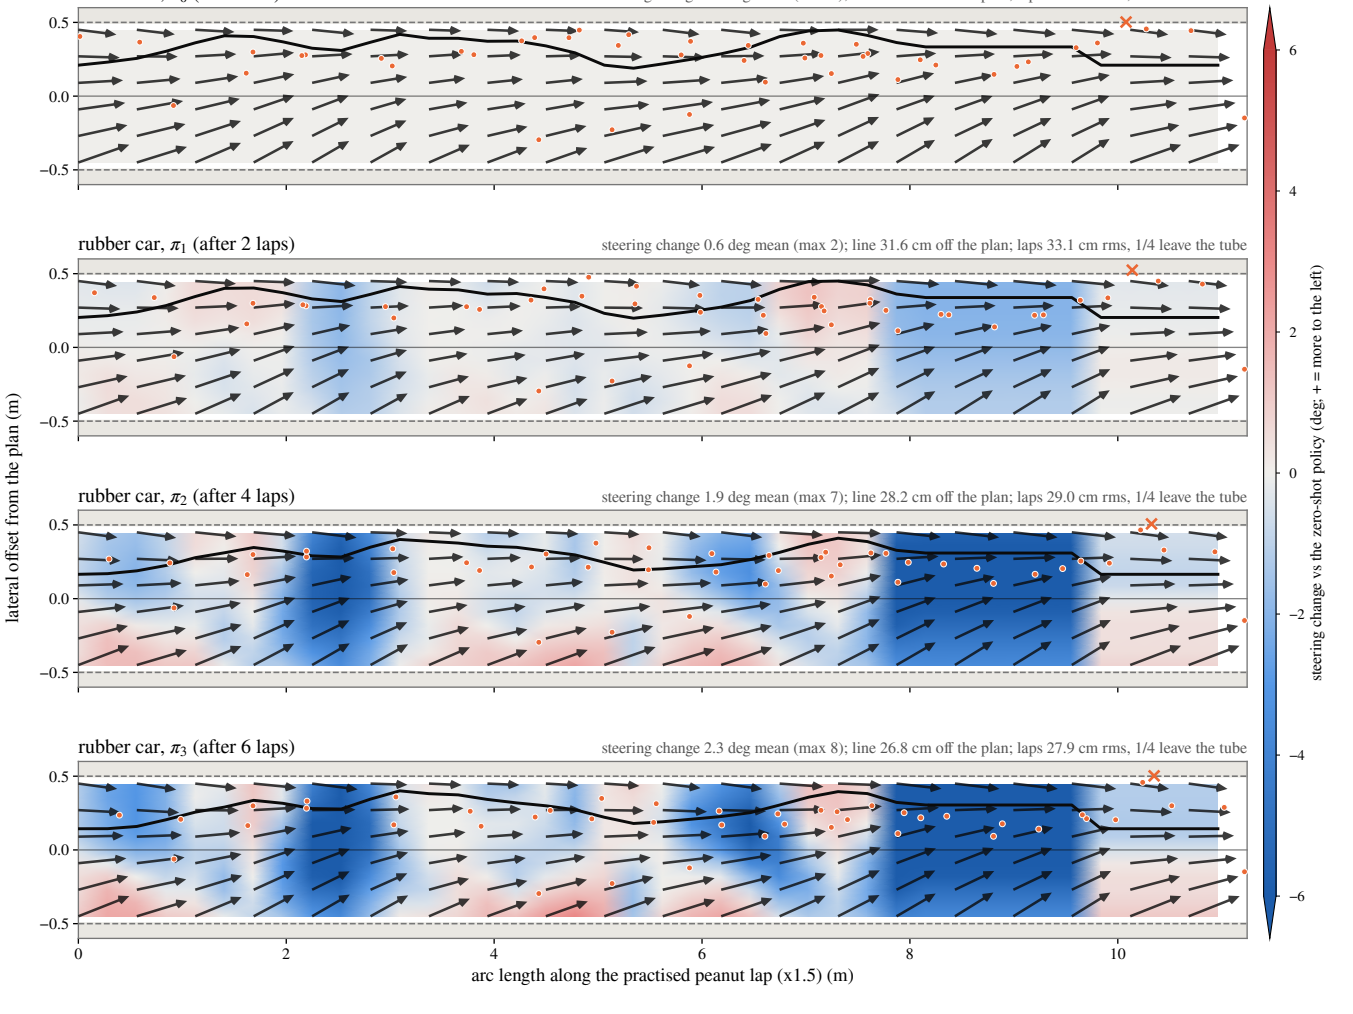

rubber car, π_0 (zero-shot)
steering change 0.0 deg mean (max 0); line 31.8 cm off the plan; laps 33.7 cm rms, 1/4 leave the tube
rubber car, π_1 (after 2 laps)
steering change 0.6 deg mean (max 2); line 31.6 cm off the plan; laps 33.1 cm rms, 1/4 leave the tube
rubber car, π_2 (after 4 laps)
steering change 1.9 deg mean (max 7); line 28.2 cm off the plan; laps 29.0 cm rms, 1/4 leave the tube
rubber car, π_3 (after 6 laps)
steering change 2.3 deg mean (max 8); line 26.8 cm off the plan; laps 27.9 cm rms, 1/4 leave the tube
lateral offset from the plan (m)
0.5
0.0
−0.5
0
2
4
6
8
10
arc length along the practised peanut lap (x1.5) (m)
steering change vs the zero-shot policy (deg; + = more to the left)
6
4
2
0
−2
−4
−6
0.50 m tube (safety envelope)
4 laterally perturbed starts, every 0.2 s
leaves the tube
where the push is zero
where the car is 1.0 s later