XFP100C VX 1~ 60HZ (wet pit)

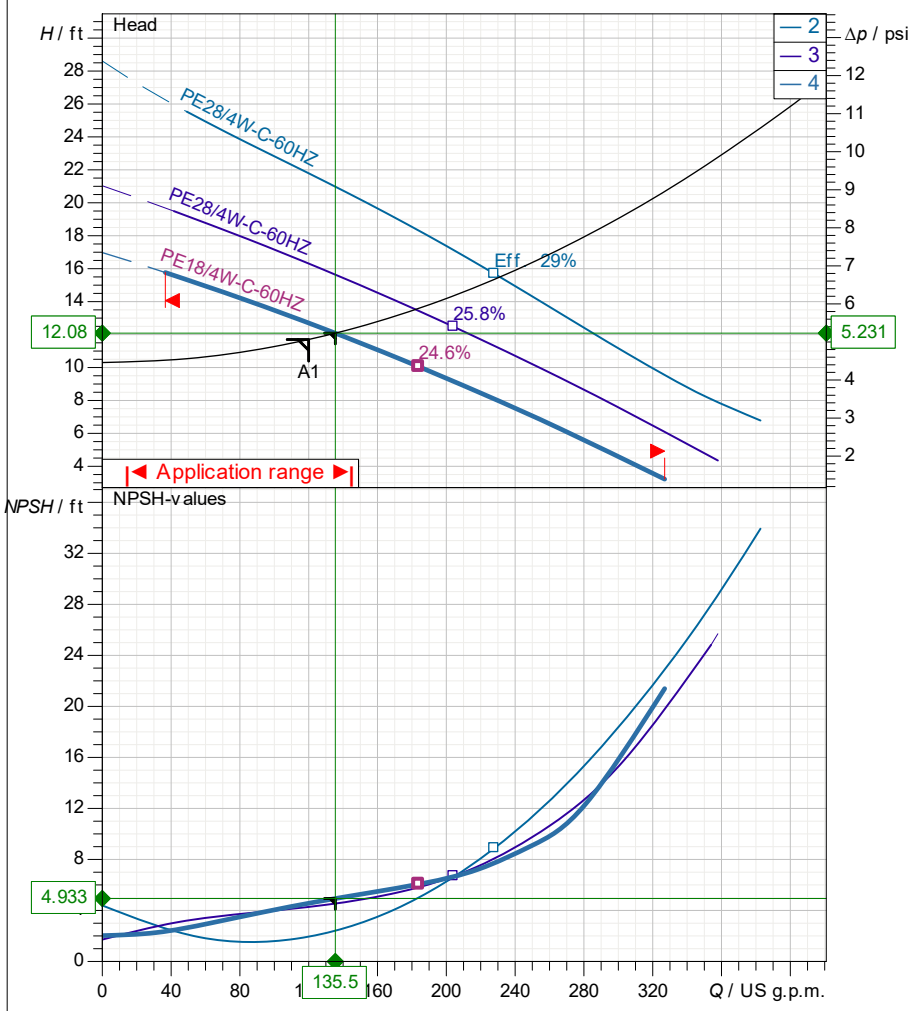

Test Standard
ISO 9906, HI 11.6/14.6≤10kW

Curve Name
4

Impeller Diameter
5 7/8 inch

This pump (non oil-cooled) is suitable for wet pump installation only.
It is NOT suitable for dry pump installation.

2026-03-05

Operating data specification			
Flow	135.5 US g.p.m.	Power input	2.21 hp
Efficiency	23.4 %	Head	12.1 ft
NPSH	4.93 ft	Shaft power	1.77 hp
Temperature	68 °F	Fluid	Water
No. of pumps	1	Nature of system	Single head pump
Pump data			
Type	XFP100C VX 1~ 60HZ (wet pit)	Make	SULZER
Series	XFP PE1-PE3	Impeller	Vortex impeller
N° of vanes	6	Impeller size	5 7/8 inch
Free passage	3.94 inch	Suction flange	DN100
Discharge flange	DN100	Type of installation	
Moment of inertia	0.114 lb ft²		Wet well installation with pedestal
Motor data			
Rated voltage	230 V	Frequency	60 Hz
Rated power P2	2.41 hp	Nominal Speed	1750 rpm
Number of poles	4	Efficiency	79.4 %
Power factor	0.935	Rated current	10.5 A
Starting current	21.9 A	Rated torque	7.23 lbf ft
Starting torque	14.2 lbf ft	Degree of protection	IP 68
Insulation class	A	No. starts per hour	15

Sulzer reserves the right to change any data and dimensions without prior notice
and can not be held responsible for the use of information contained in this software.

Curve number	Pump performance curves	SULZER
Reference curve XFP100C-VX 1 ph 60HZ	**XFP100C VX 1~ 60HZ (wet pit)**	

					Discharge DN100	Frequency 60 Hz
Density 62.31 lb/ft³	Viscosity 1.077E-5 ft²/s	Test Standard ISO 9906, HI 11.6/14.6≤10kW			Rated speed 1772 rpm	Date 2026-03-05
Flow 135.5 US g.p.m.	Head 12.1 ft	Shaft power 1.77 hp	Power input 2.21 hp	Rated power P2 2.41 hp	Hyd. efficiency 23.4 %	NPSH 4.93 ft

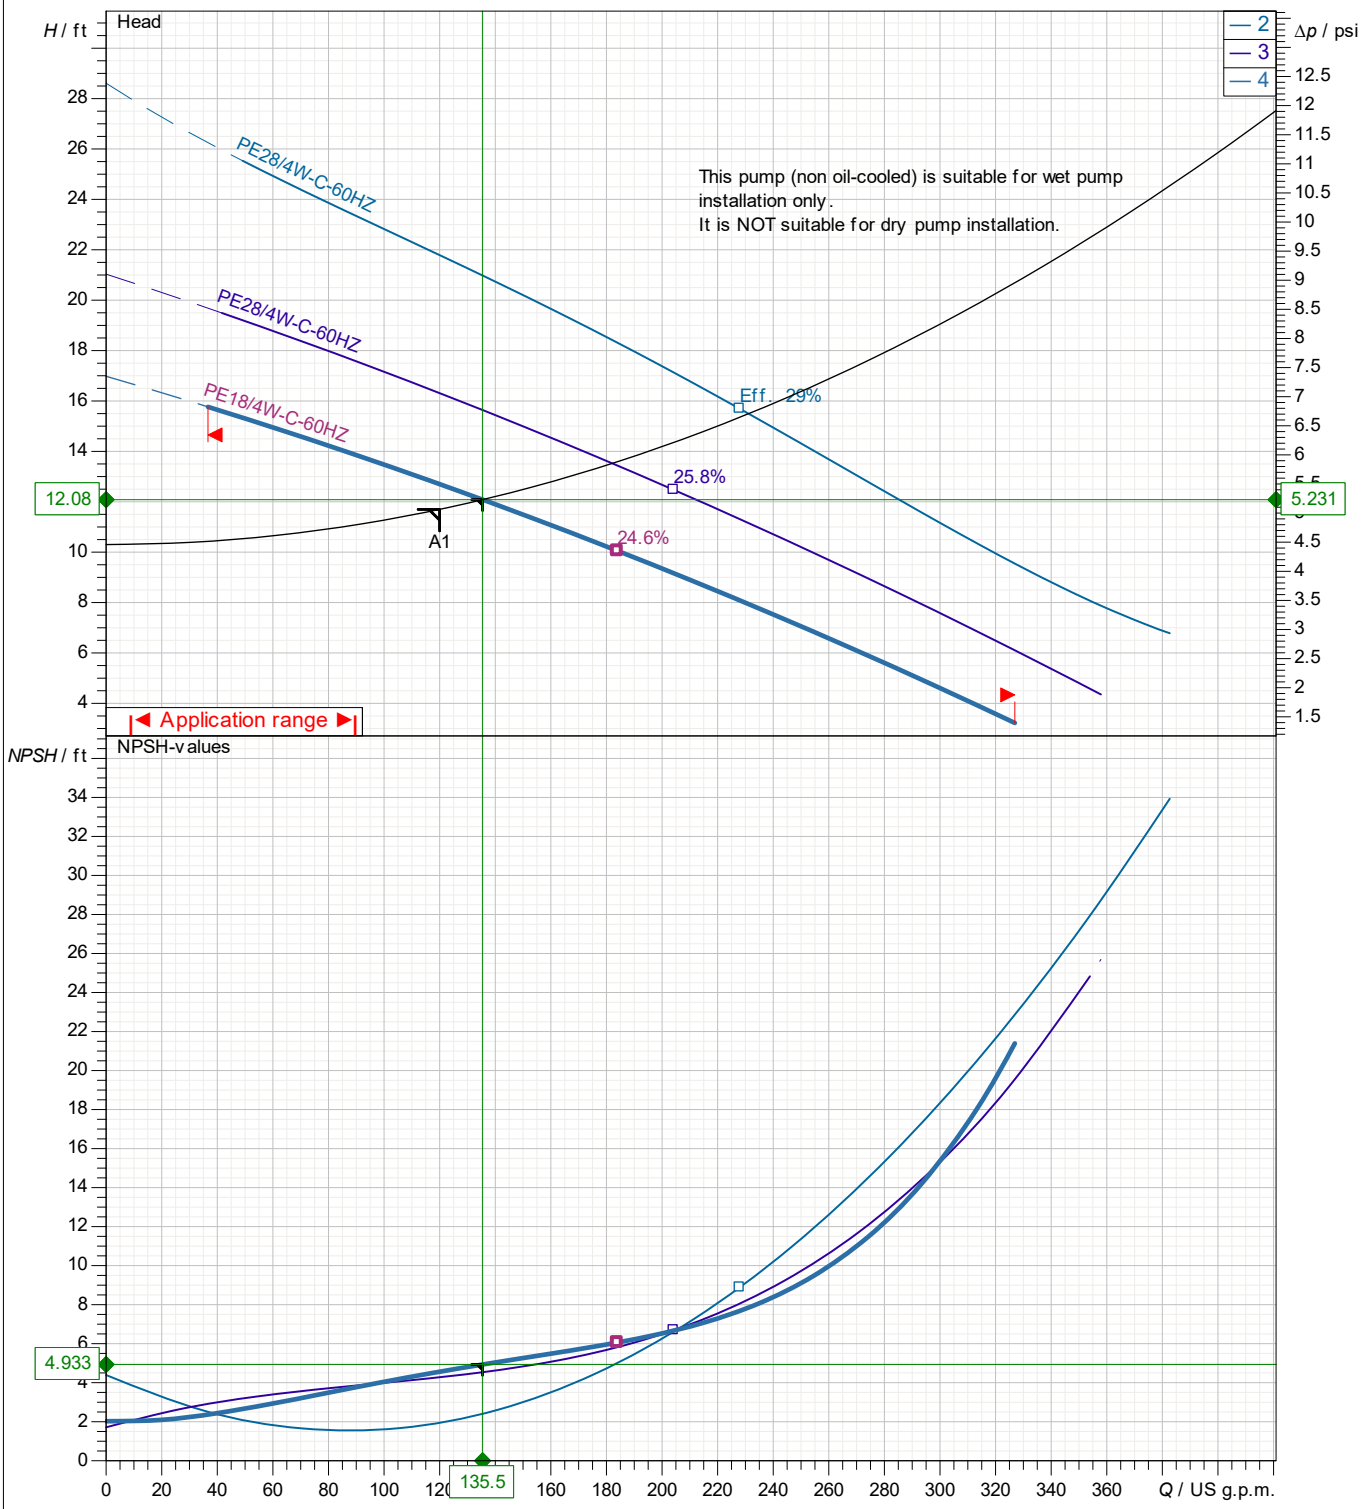

Wet well installation with pedestal

Impeller size	N° of vanes	Impeller	Solid size	Revision
5 7/8 inch	6	Vortex impeller	3.94 inch	

Sulzer reserves the right to change any data and dimensions without prior notice and can not be held responsible for the use of information contained in this software.

Frequency	PE1
60 Hz	

Motor performance curve

PE18/4W-C-60HZ

SULZER

Rated power	Service factor	Nominal Speed	Number of poles	Rated voltage	Date
2.41 hp	1	1750 rpm	4	230 V	2026-03-05

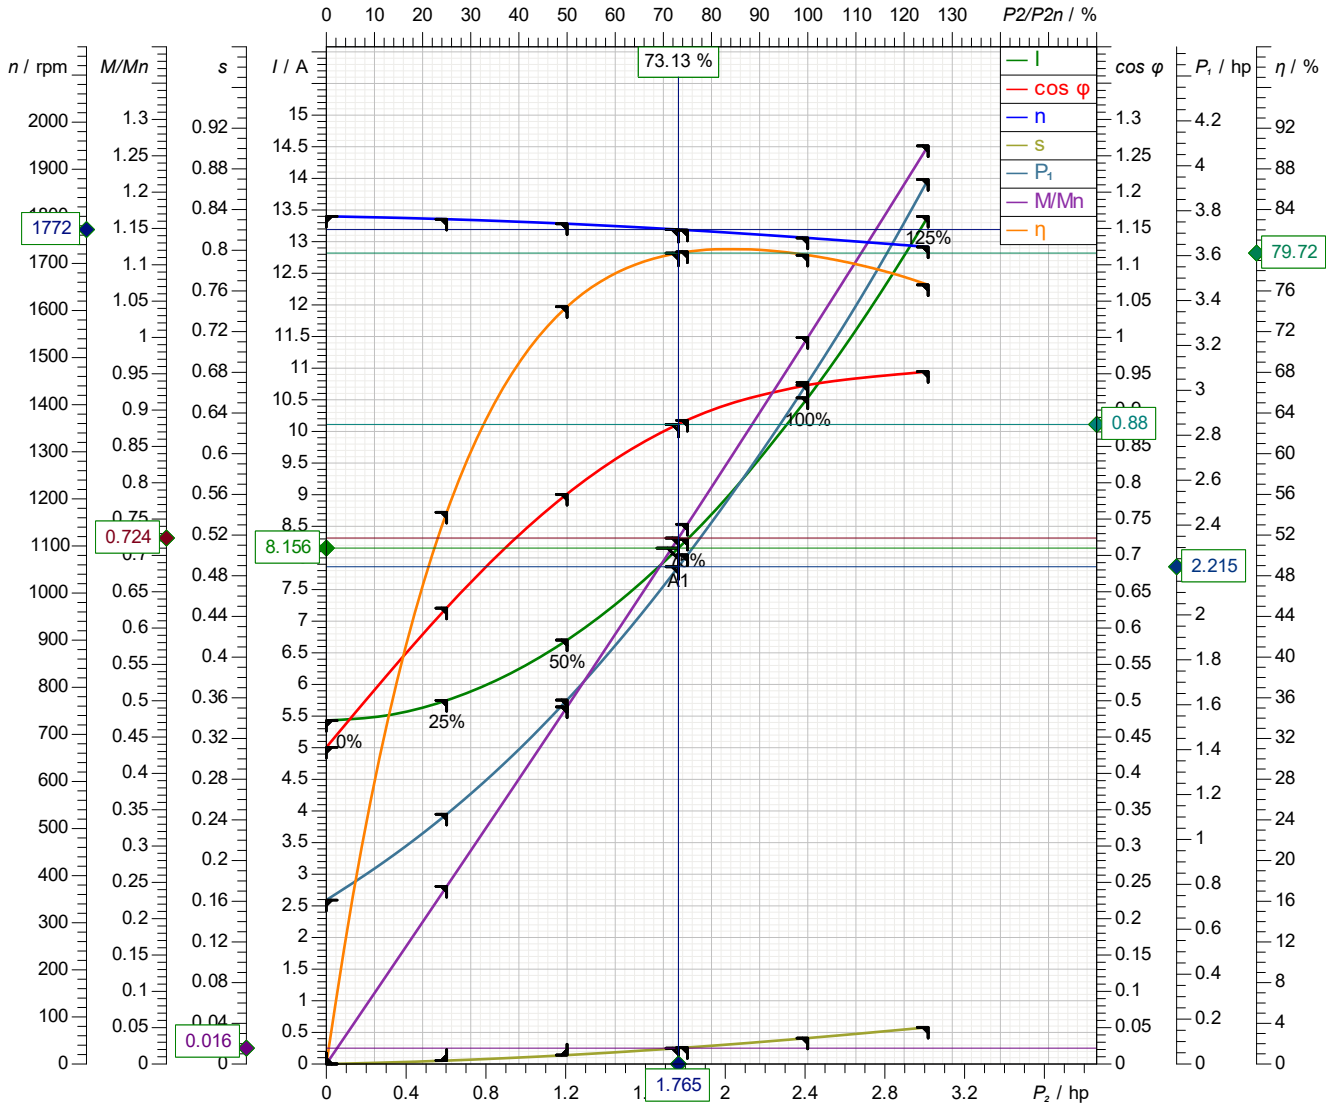

Symbol	No load	25 %	50 %	75 %	100 %	125 %
P_2 / hp	0	0.6035	1.207	1.81	2.414	3.017
P_1 / hp	0.7301	1.113	1.621	2.267	3.036	3.939
I / A	5.43	5.749	6.703	8.297	10.53	13.4
cos φ	0.4359	0.6275	0.7841	0.8859	0.9345	0.9531
n / rpm	1800	1794	1784	1771	1754	1735
s / %	0	0.3388	0.8779	1.622	2.55	3.612
M / lbf ft	0	1.767	3.553	5.37	7.228	9.134
η / %	0	54.24	74.46	79.85	79.52	76.6

Tolerance according to VDE 0530 T1 12.84 for rated power

Starting current	Starting torque	Moment of inertia	No. starts per hour
21.9 A	14.2 lbf ft	0.0475 lb ft²	15

Sulzer reserves the right to change any data and dimensions without prior notice
and can not be held responsible for the use of information contained in this software.