

大品牌，好质量，斯格造

Big brand, good quality, made by Sige



苏州斯格电梯有限公司

SUZHOU SIGE ELEVATOR CO.,LTD.

工厂地址：江苏省苏州市吴江区七都镇虹桥路20号

Factory Address: No. 20, Hongqiao Road, Qidu Town, Wujiang District, Suzhou City, Jiangsu Province

电话号码 (Telephone Number) : 86-0512-82068886 +998889786006

邮箱地址 (E-mail) : liyuzhen@sigegroup.com

邮编 (Postcode) : 215334



大品牌，好质量，斯格造

Big brand, good quality, made by Sige



一个平均年龄39岁的年轻团队因为追求美丽的生活而创造美丽的产品电梯。苏州斯格电梯有限公司技术研发始于2006年，注册于2009年以来专注于电梯的研发、设计、制造、安装、维保。

通过不断创新，以自主研发的专利技术多维度提升产品的行业领先配置，如：静音，舒适，自动救援，智能控制，较小空间定做，美观等。涵盖无机房曳引钢带式、液压式、强驱式等多种驱动方式，包括自动门、手动门、圆弧门等多种开门方式，并能够实现90-360度四面立体开门，空间设计游刃有余。每一次技术创新都源自于我们不断追求客户的完美感受。

A young team with an average age of 39 has created a beautiful product elevator, because of the pursuit of a beautiful life. The technology research and development of Suzhou Sige Villa Elevator Co., Ltd. started in 2006 and was registered in 2009. It has focused on the research and development, design, manufacturing, installation and maintenance of elevators.

Through continuous innovation, self-developed patented technology is used to enhance the industry-leading configuration of products in multiple dimensions, such as: silent, comfortable, automatic rescue, intelligent control, small space customization, beautiful appearance, etc. Covers a variety of driving methods such as machine room-less traction steel belt, hydraulic, forced drive type, etc., including automatic door, manual door, arc door and other door opening methods, and can achieve 90-360 degree four-sided three-dimensional door opening. Space design is easy to do. Every technological innovation comes from our continuous pursuit of customer perfection.



斯格电梯系列
SIGE ELEVATOR SERIES

4G智能监控技术

4G intelligent monitoring technology

技术亮点一



远程监控功能

Remote monitoring function

通过网络将电梯运行数据传输至SIGE服务中心，给您24小时贴心守护，让安全时刻在您身边。

SiGe will provide you with 24-hour security service through the elevator network.



设备端：Equipment end

网络端：公网或专网（各大电信运营商）
Network end: public network or dedicated network (telecom operators)

数据中心服务器端
Server end of data center



物联网技术的优势：

Advantages of Internet of things technology:

- 关人立即报警
- 电梯故障自动报警（1.急修报警； 2.自动记录到场时间； 3.自动记录离场时间）
- 电梯维保监控和监管
- 定期电梯年检记录
- 更换配件提醒
- 根据生产批次快速定位问题电梯
- 根据电梯历史运行及故障情况进行安全隐患预警
- 全天候24小时数据监控
- Turn off the police immediately
- Close the elevator automatic fault alarm (1.emergency alarm; time of arrival; 2.automatic recording 3.automatic recording time of departure)
- Elevator maintenance monitoring and supervision
- Elevator inspection record
- Replacement parts reminder
- According to the production batch of rapid positioning of the elevator
- According to the history of elevator operation and fault conditions for security risk warning
- All-weather 24 hours data monitoring

人脸识别，人体测温

Face recognition,
body temperature measurement

技术亮点二

人脸识别召梯系统是数字信息发展中的一种生物特征识别电梯门禁技术，通过摄像机采集含有人脸的图像或者视频流，并自动在图像中检测和跟踪人脸，进而对检测到的人脸进行人脸定位、人脸识别预处理、记忆存储和比对，从而达到识别不同人身份的目的。

Face recognition elevator call system is a biometric recognition elevator access control technology in the development of digital information. It collects images or video streams containing faces by camera, and automatically detects and tracks faces in the images. Then, it carries out face location, face recognition preprocessing, memory storage and comparison of the detected faces, so as to achieve the purpose of identifying different people.



人脸识别、人体测温设备
Face recognition, human body
temperature measurement equipment



负离子消毒，让呼吸更顺畅

Negative ion disinfection makes
breathing more smooth

技术亮点三

实验报告证明PM2.5颗粒净化效率≥99%，杀菌消毒率≥99%，冠状病毒灭活率>99.99%

The experimental report showed that the purification efficiency of PM2.5 particles was more than 99%, the sterilization rate was more than 99%, and the coronavirus inactivation rate was more than 99.99%.



负离子具有洁净空气的作用

Negative ions have the function of cleaning air

除尘作用：小粒径的负氧离子可以与空气中的污染物相互作用、复合、扩散而影响污染物的变换，或作为催化剂在化学过程中改变痕量气体的毒性。小至0.01微米、在工业上难以除去的微粒飘尘，亦有明显的沉降去除效果。

抑菌、除菌作用：负氧离子具有较高的活性，有很强的氧化还原作用，能破坏细菌的细胞膜或细胞原生质活性酶的活性，从而达到抗菌杀菌的目的。在高浓度的负氧离子环境中，经测定，空气中霉菌、细菌数可降低90%以上。

除臭作用：空气负离子能与空气中的有机物起氧化作用而清除其产生的异味，因而具有清洁空气的作用。



Dust removal: negative oxygen ions with small particle size can interact, compound and diffuse with pollutants in the air to affect the transformation of pollutants, or as catalysts to change the toxicity of trace gases in chemical processes. The particles as small as 0.01 micron, which are difficult to remove in industry, also have obvious sedimentation removal effect.

Bacteriostasis and sterilization: negative oxygen ions have high activity and strong redox effect, which can destroy the activity of bacterial cell membrane or cell protoplast active enzyme, so as to achieve the purpose of antibacterial and sterilization. In the high concentration of negative oxygen ion environment, the number of mold and bacteria in the air can be reduced by more than 90%.

Deodorization: the negative air ions can oxidize the organic matter in the air and remove the peculiar smell, so it has the function of cleaning the air.

一键远程救援功能

Automatic rescue function
after power failure

技术亮点四

标配物联网4G智能硬件，4G智能硬件可以配置SIM卡。若确实遇到无法完成自动救援的问题，仍可以通过轿内的一键拨号功能，拨打救援电话。与家人或专业救援人员联系，实现解困。


4G intelligent hardware of Internet of things is provided as standard, and SIM card can be configured for 4G intelligent hardware. If you really encounter the problem of unable to complete the automatic rescue, you can still dial the rescue call through the one key dialing function in the car. Contact family members or professional rescue personnel to solve the problem.



ARD断电自动救援功能

ARD power failure
automatic rescue function

技术亮点五

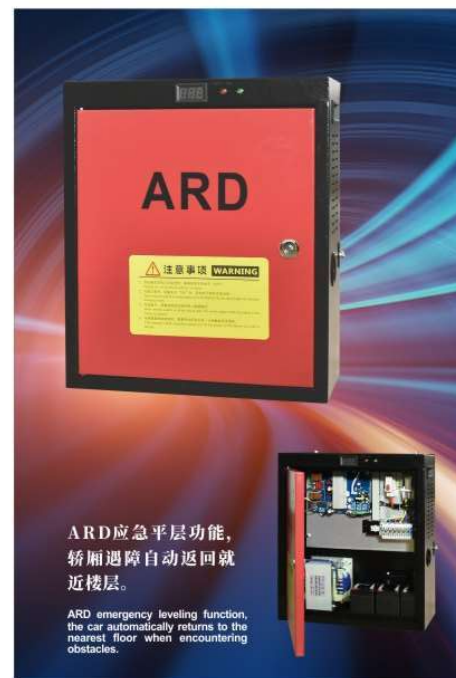

- 一体柜兼具智能自动救援、断电自动救援、一键远程救援等多重安全保障，各功能使用，说明如下。

The all-in-one cabinet has multiple security guarantees, such as intelligent automatic rescue, power-off automatic rescue, one button remote rescue, etc. the functions are described as follows.

- 系统运行过程中电网停电，一体柜ARD功能启动，系统向轻载方向低速运行返平层，到达门区后，自动开门放人，救援完成后约10s，关门到位信号有效过15S后，系统断电。

During the operation of the system, the power grid is cut off, the ard function of the integrated cabinet is started, the system runs at low speed in the direction of light load and returns to the leveling floor. After reaching the door area, the door will be opened automatically to release people. About 10 seconds after the rescue is completed, and the signal of closing the door in place is effective for 15 seconds, the system is powered off.

ARD智能管理

ARD intelligent management

A、充电采用数字双环控制，防止电池不能充电；

A. The charging adopts digital double loop control to prevent the battery from charging;

B、长寿命锂电池，寿命可达2年；

B. Long life lithium battery, life up to 2 years;

C、过压、欠压保护；

C. Over voltage and under voltage protection;

D、电池NTC温度监测；

D. Battery NTC temperature monitoring;

E、低电量示警功能。

E. Low battery warning function.

超时不运行提醒，让乘坐更贴心

Negative ion disinfection
make breathing easier

当乘客在电梯里超过10分钟（可以设置时间）不运行，电梯会自动提醒服务人员和维保人员进行安全检查。

When passengers are not running in the elevator for more than 10 minutes (the time can be set), the elevator will automatically remind the service personnel and maintenance personnel to conduct a safety inspection.

10 min

乘客在电梯里超过10分钟不运行（可以自由设置时间）
Passengers do not run in the elevator for more than 10 minutes
(time can be set freely)



技术亮点六

钢带断带检测功能，让乘坐更放心

Steel belt broken belt detection function
make the ride more assured

采用包裹钢带，保护钢丝不被锈蚀，运行无需加油，节能环保。

啮合时减少摩擦噪音，避免金属的直接摩擦，延长使用寿命。

安装断丝保护装置后，遇到钢丝断裂时电梯会停止运行，保护乘客的安全。

The wrapped steel belt is used to protect the steel wire from being corroded, and the operation does not need to be refueled, which is energy saving and environmental protection.

Reduce friction noise when meshing, avoid direct friction of metal, and extend service life.

After installing the broken wire protection device, the elevator will stop running when the wire breaks to protect the safety of passengers.



技术亮点七

担架电梯

Stretcher elevator

产品一



人性设计 功能丰富

Human-centered design, rich functions

满足紧急运送病人的需要，采用人性化设计，配置整套尖端设备，运行平稳舒适。轿厢宽敞明亮，不仅具有普通载客功能，更可容纳担架，同时还为人们搬运较大家具提供了方便。

It satisfies the needs of emergency patients' delivery. It applies human-centered design and is equipped with a full set of top equipments. It is smooth and comfortable in running. It has bright and broad car. It not only has ordinary passenger-transport functions, furthermore, it can contain stretch. Meanwhile, it is convenient for the people to carry large furniture.

量身定做 安全便捷

Tailor-made, safe and convenient

斯格担架电梯，可为您的建筑量身设计。采用高强度型材制作而成的轿厢，可承载各类较重担架，安心运行病人或大件物品，有效保护人们及物品的安全。

SIGE stretcher elevator has been specially designed for your building. It applies high strength section materials to produce the elevator cars. It can bear various kinds of heavy stretchers. It safely delivers the patients/goods. It effectively protects the security of both the people and the goods.



担架电梯参数表

Stretcher elevator specifications

额定载重 (kg) Rated capacity	载乘人数 (人) Persons	额定速度 (m/s) Rated speed	轿厢净尺寸(mm) Car net size (mm)	净门尺寸(mm) Net door opening size (mm)	井道净尺寸(mm) Hoistway net size (mm)				机房尺寸(mm) Machine room size (mm)		
			宽×深 Width × Depth	中分双开门 Two panels central opening	宽×深 Width × Depth	顶层高 H.R.H	底坑深 P.H		宽×深 Width × Depth	机房高 MR.H	机房净高 NMR.H
800	10	1.0	1100*1800	900*2100	2150*2250	4300	1500		2150*2250	2500	2300
		1.5/1.75				4600	1700				
		2.0				4700	1900				
1000	13	1.0	1200*2000	900*2100	2200*2450	4300	1500		2200*2450	2500	2300
		1.5/1.75				4600	1700				
		2.0				4700	1900				

土建示意图仅供参考 The civil diagrammatic sketch is for reference only.

小机房乘客电梯

产品二

Small machine room passenger elevator

电梯高效率安装的最佳设计方案

The optimal design project for high efficiency layout of elevators

斯格小机房乘客电梯，提升了电梯系统的可靠性与灵活性，实现了真正的环保与节能的优势。


斯格小机房乘客电梯采用更合理的土建布局，使得机房面积达到与井道一样大，节省了机房空间，同时减少了机房对建筑特有的外观影响，可以适应对外观有特殊建筑要求的建筑物，不仅降低了建筑成本，同时更有助于激发建筑设计师的灵感，创造出幢幢雄伟的艺术品。

SIGE Small machine room passenger elevator inherited the modern highly sophisticated technology, based on the improved elevator system reliability and flexibility to achieve a truly environmentally and energy-saving advantages.


SIGE Small machine room passenger elevator is compared with the usual machine room, with a reasonable layout construction, making room area as large as the hoistway reaches saves floor space, while reducing the appearance of the engine room of the building-specific effects on the appearance. It can be adapted to the requirements of a particular building construction matter, not only reduces the cost of construction, but also help to stimulate architects inspired to create blocks of magnificent works of art.



由于结构与部件原因，机房占有较大面积
Due to structural and component reasons, the room occupies a larger area



小机房电梯的机房，为您节省更多井道空间
Small machine room elevator save more space for you



节能
Energy Saving



绿色
Green



安全
Safety



小机房乘客电梯参数表

Small machine room passenger elevator specifications

载重 (Load/kg)	速度 (Speed/m/s)	轿厢净尺寸(宽×深) (Car net size (Width × Depth))	开门尺寸 (Door opening size (mm) (Width × Height))	井道尺寸(宽×深) (Hoistway size(mm) (Width × Depth))	机房尺寸(宽×深×高) (Machine room size(mm) (Width × Depth × High))	基坑深度 (Pit depth (mm))	顶层高度 (Overhead height (mm))
450	1.0	1100*1150	700*2100	1700*1800	1700*1800*2300	1500	4500
	1.0					1500	4500
630	1.75	1300*1200	800*2100	1900*1900	1900*1900*2300	1600	4600
	1.0					1500	4500
800	1.75	1400*1350	800*2100	2000*2100	2000*2100*2300	1600	4600
	2.0					1800	4700
	2.5					2000	5000
	1.0					1500	4500
1000	1.75	1600*1400	900*2100	2200*2200	2200*2200*2300	1600	4600
	2.0					1800	4700
	2.5					2000	5000
	1.0					1500	4500
1250	1.5	1800*1600	1100*2100	2500*2300	2500*2300*2500	1600	4700
	1.75					1800	4800
	2.5					2000	5000
	1.0					1500	4500
1600	1.75	1900*1800	1200*2100	2600*2500	2600*2500*2500	1600	4700
	2.0					1700	4800
	2.5					2000	5000
	1.0					1500	4500

±建示意图仅供参考 The civil diagrammatic sketch is for reference only.

无机房乘客电梯

产品三


Machine room-less passenger elevator

大幅降低建筑对预留井道的规划难度


Greatly reduce the planning difficulty

斯格无机房电梯产品深谙环保理念，节能降耗，节约建筑面积、提高设计自由度，能充分体现绿色人文。与同等载重量级别的有机房电梯相比，节约电能30%以上，节约建筑面积10%。斯格电梯突破了传统电梯必须设置机房的前提，为现代建筑有限空间提供了无限的创造可能。

SIGE Machine room-less passenger elevator know the environmental philosophy, saving energy, saving floor space, increase design freedom, can fully reflect the green humanities. With the same load level compared to the machine room elevator, save energy more 30% and 10% construction area. SIGE elevator broke the traditional premise of the elevator machine room must be set for the modern construction limited space provides unlimited creation possible.

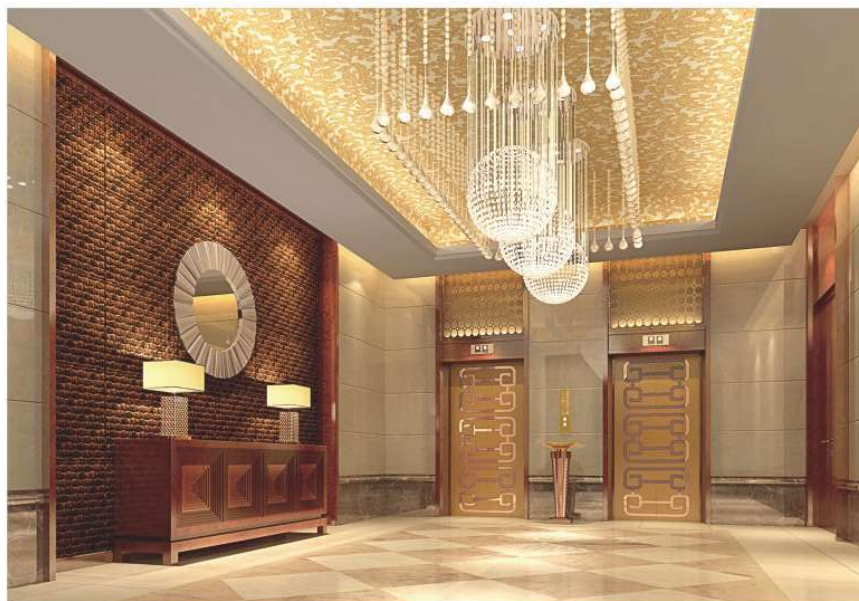

由于结构与部件原因，
机房占有较大面积
Due to structural and
component reasons, the
room occupies a larger area



无机房电梯
将空间利用放至最大化
Machine roomless elevator
maximize space utilization



无机房乘客电梯参数表

Machine room-less passenger elevator specifications

载重 Load(kg)	速度 Speed(m/s)	轿厢净尺寸(宽×深) Car net size (Width × Depth)	开门尺寸 Door opening size (mm) (Width × High)	井道尺寸(宽×深) Hoistway size (mm) (Width × Depth)	底坑深度 Pit depth (mm)	顶层高度 Overhead height (mm)
630	1.0	1200*1300	800*2100	2100*1900	1600	4400
	1.5				1700	4500
	1.75				1800	4600
800	1.0	1400*1350	800*2100	2300*2000	1600	4400
	1.5				1700	4500
	1.75				1800	4600
1000	1.0	1400*1600	900*2100	2300*2100	1600	4400
	1.5				1700	4500
	1.75				1800	4600
1250	1.0	1600*1800	1100*2100	2600*2400	1600	4500
	1.5				1700	4700
	1.75				1800	4700
1600	1.0	1700*2000	1200*2100	2800*2500	1600	4600
	1.5				1800	4800
	1.75				2000	5000

土建示意图仅供参考 The civil diagrammatic sketch is for reference only.

观光电梯

Observation elevator


产品四

优质轿壁


Superior car wall

采用高安全夹胶玻璃，通透性好，乘客可通过透明轿壁观赏繁华的城市美景；夹胶玻璃内的间隔层具有防辐射的功能，对声音的音波振动起到缓冲作用，达到隔音效果；大面积的轿壁玻璃设计，线条流畅，不仅美化了轿厢外观，更为建筑增添美感。


It adopt highly secure safety laminated glass. It is transparent. The passengers might appreciate the busy and prosperous city sight through the transparent car wall. Lamination layer in laminated glass resists radiation. It buffers sound-wave vibration and isolates the sound. Large area car wall glass design shows smooth and beautiful lines. It beautifies the elevator car outline. Furthermore, the buildings are more attractive.




半圆型
Semi-circular shaped



正方形
Square shaped



菱型
Cutting-angle-type



展望型
Panoramic

钢结构

Steel structure

不仅完美展现了紧凑的空间和整体的美观，而且可以进行不同的土建设计，方便快捷，有圆形、半圆型、方形等多种款型。

It perfectly displays an overall compact and beautiful space. It can carry out different construction layout designs. It is prompt and convenient. Round, half-round, square etc Are available for your free choice.

观光电梯参数表

Observation elevator specifications

载重 Load (kg)	载乘人数 No. of Persons	额定速度 (m/s) Rated speed	净开门 Net door opening size (宽×深) Width × Depth mm	结构形式 Structural style	轿厢尺寸 Car size (宽×深) Width × Depth mm	井道尺寸(mm) Hoistway size (mm)			
						井道宽 Hoistway net width		井道深 Hoistway net depth	
						AH	AH1	BH	BH1
630	8	1.0/1.5/1.75/2.0	800*2100	圆形 Round	1100*1600	2300	1925	2200	1400
				菱形 Rhombus		2300	1925	2200	1400
800	10	1.0/1.5/1.75/2.0	800*2100	圆形 Round	1200*1700	2300	1925	2300	1400
				菱形 Rhombus		2300	1925	2300	1400
1000	13	1.0/1.5/1.75/2.0	900*2100	圆形 Round	1400*1800	2500	2125	2400	1400
				菱形 Rhombus		2500	2125	2400	1400
1250	16	1.0/1.5/1.75/2.0	1000*2100	圆形 Round	1600*2000	2600	2225	2600	1500
				菱形 Rhombus		2600	2225	2600	1500
1600	21	1.0/1.5/1.75/2.0	1100*2100	圆形 Round	1800*2000	2800	2425	2600	1800
				菱形 Rhombus		2800	2425	2600	1800

土建示意图仅供参考 The civil diagrammatic sketch is for reference only.

医用电梯

Hospital Elevator

产品五



选配 残障人操纵箱
Disabled person control box optional

倾心呵护 关怀备至

Considerate and wholehearted caring

斯格医用电梯，专为医院、医疗结构、康复中心、疗养院等场所量身设计，不仅用于运送乘客，还因使用的特殊而对电梯的功用性能有着特殊和严格的要求。斯格医用电梯，能精确地控制电梯的运行速度，运行平稳、舒适。

斯格医用电梯注重人性化的设计，来充分优化轿厢结构，最大限度地满足客户的使用要求。为乘客营造了一个宁静、淡雅的空间。以其独特的设计理念，创造与医院环境和谐统一，清洁明亮的空间，为乘客创造了一个舒适的环境，为病人增添几分愉悦的心情。

SIGE hospital elevator, not only for transporting passengers, but also the use of special and performance of the functions of the elevator has a special and strict requirements. SIGE hospitalL elevator, the elevator can accurately control the speed, stable and comfortable.

SIGE hospital elevator its unique design ideas, and create harmony with the hospital environment, clean and bright space for passengers to create a comfortable environment for the rehabilitation of the patient to add a bit more confidence.



医用电梯参数表

Hospital elevator specifications

载重 Load(kg)	载客人数 No. of persons	速度 Speed(m/s)	开门方式 Door opening type	净开门 Door opening size	轿厢尺寸 Car net size	井道净尺寸(mm) Hoistway net size (mm)				机房尺寸 Machine room net size (mm)	
				(宽×深) Width × Depth mm	(宽×深) Width × Depth mm	(宽×深)Width × Depth mm		底坑 Pit depth (mm)	顶层高 OH	宽×深×高 Width × Depth × High mm	
						单面开门 single cabin door	贯通门 (可选) Opposite door (optional)				
1600	21	1.0	双折旁门 Double-folded side opening	1200*2100	1400*2400	2400*3000	2400*3100	1500	4500	3200*4200*2800	
		1.5/1.75						1800	4800		
		2.0						2000	5000		
		1.0	中分开门 Center opening	1100*2100		2500*2900	2500*3000	1500	4500		
		1.5/1.75						1800	4800		
		2.0						2000	5000		

土建示意图仅供参考 The civil diagrammatic sketch is for reference only.

医用电梯轿厢装潢

Hospital elevator car decoration



SG-Y01

标配 Standard

吊顶：发纹不锈钢，白色亚克力灯饰

轿壁：钢板喷漆

扶手：不锈钢管

地板：PVC地板

Ceiling: Hairline Stainless Steel, White acrylic lighting

Car wall: Painted Steel

Handrail: Steel steel tube

Floor: PVC floor



SG-Y02

选配 Optional

吊顶：发纹不锈钢，亚克力拱形灯饰板

轿壁：发纹不锈钢

扶手：扁形不锈钢

地板：PVC地板

Ceiling: Hairline stainless steel, acrylic arch lighting decoration board

Car wall: Hairline stainless steel

Handrail: Flat stainless steel

Floor: PVC floor

注：图片系电脑绘制，可能与实际略有不同，以实物为准。
Note: pictures have been drawn by computer. It might be slightly different from actual colors. Please take real product as criterion.

乘客电梯标准配置
Passenger elevator standard configuration



SG-K01 标配Standard


吊 顶：镜面不锈钢框架，亚克力透光板
轿 壁：发纹不锈钢
轿 门：发纹不锈钢，中分门
地 板：PVC 地板

Ceiling: Mirror stainless steel frame,
acrylic transparent board
Car wall: Hairline stainless steel
Car door: Hairline stainless steel, center opening
Floor: PVC floorboard



SG-C01 标配Standard

操纵箱：发纹不锈钢
Operation panel: Hairline stainless steel

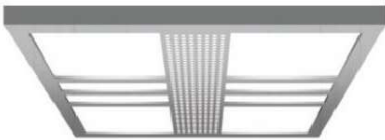

SG-D01 标配Standard

不锈钢框架，白色有机板，明亮照明
Stainless steel frame, white organic board,
bright lighting

外召唤
Outer calling



SG-W01A



SG-TM01 标配 Standard

首层为发纹不锈钢，其他层为喷塑钢板
The first layer is hairline stainless steel,
the other layers are sprayed steel



SG-K02

选配Optional

吊顶：发纹不锈钢框架，亚克力透光板
轿壁：发纹不锈钢，镜面不锈钢
地板：PVC（可选大理石）

Ceiling:Hairline stainless steel frame,acrylic transparent board
Car wall:hairline stainless steel,mirror stainless steel
Floor:PVC(optional marble)



SG-K03

选配 Optional

吊顶：喷涂钢板，亚克力透光板，LED灯
轿壁：发纹不锈钢，镜面不锈钢蚀刻，镜面不锈钢
扶手：发纹不锈钢管（选配）
地板：PVC（可选大理石）

Ceiling:Sprayed steel plate (light coffee),acrylic,LED light
Car wall Hairline stainless steel,mirror stainless steel etching,
mirror stainless steel
Handrail:Hairline stainless steel tube(optional)
Floor:PVC(optional marble)



SG-K06

选配 Optional

吊顶：镜面边框，两侧辅以LED灯，中部是拱形白色透光板的柔光照明设计
轿壁：镜面，蚀刻，发纹
扶手：不锈钢扁扶手
地板：PVC（可选大理石）

Ceiling:Mirror frame,supplemented by LED lights on both sides,themiddle part is a softlighting design with an arched white light-transmitting board
Car wal:Mirror,etching,hairline
Handrail:Stainless steel flat handrail
Floor:PVC(optionalmarble)



SG-K07

选配 Optional

吊顶：垂悬式方形影像主体灯板与筒灯结合的柔光灯照明设计
轿壁：两侧发纹不锈钢，后壁发纹不锈钢与镜面蚀刻
扶手：不锈钢扁扶手
地板：PVC（可选大理石）

Ceiling:Suspended square image mainbody lamp board and sot light lighting design combined with downlight
Car walt:Hairline stainless steel on both sides,back wall hairline stainless steel and mirror etching combination
Floor:PVC(optionalmarble)




SG-K04

选配 Optional

吊顶：不锈钢镜面镂空板加柔光照明设计
轿壁：镜面不锈钢，镜面蚀刻不锈钢
扶手：不锈钢单管
地板：PVC（可选大理石）

Ceiling:Stainless steel mirror hollow board plus soft lighting design
Car wall:Mirror stainless steel,mirror etched stainless steel
Handrail:Stainless steel single tube
Floor:PVC (optional marble)

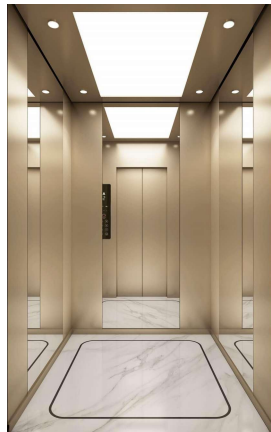


SG-K05

选配Optional

轿顶：乳白亚克力透光板，香槟金发纹
轿壁：香槟金发纹，香槟金镜面不锈钢
地板：PVC（可选大理石）

Ceiling:Acrylic transparentboard,champagne gold hairline stainless steel
Car wall:Champagne gold hairline,champagne gold mirror stainless steel
Floor:PVC(optional marble)

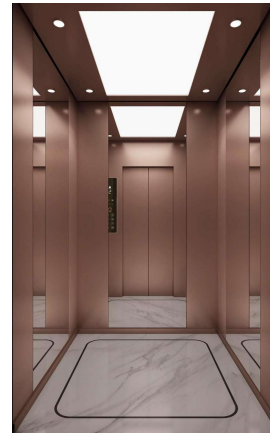

SG-K08

选配Optional

轿顶：乳白亚克力透光板，玫瑰金发纹
轿壁：玫瑰金发纹，玫瑰金镜面不锈钢
地板：PVC（可选大理石）

Ceiling:Acrylic transparentboard,rose gold hairline stainless steel
Car walt:Rose gold hairline,rose gold mirror stainless steel
Floor:PVC(optional marble)



SG-K09

选配 Optional

吊顶：黑钛镜面，两侧亚克力，LED灯
轿壁：玫瑰金发纹蚀刻不锈钢，黑钛镜面不锈钢
扶手：深棕色圆木与镜面组合
地板：PVC（可选大理石）


Ceiling:Black titanium mirror,acrylic on both sides,LED lights
Car wall:Rose gold hair pattern etching stainless steel,black titanium mirror stainless steel
Handrail:Dark brown log and mirror combination
Floor:PVC(optional marble)



SG-K10 选配Optional

吊顶：钛金镜面边框带亚克力顶板、筒灯
轿壁：大理石与镜面不锈钢组合
扶手：实木扶手带钛金支架
地板：PVC（可选大理石）

Ceiling:Acrylic transparent board,mirror stainless steel
Car wall:marble with mirror
Floor:PVC(optional marble)

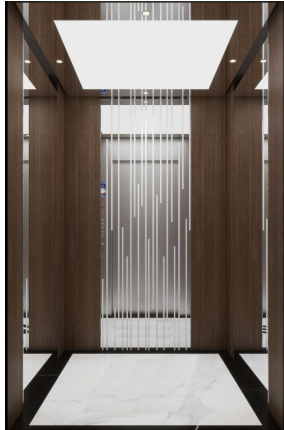

SG-K11 选配Optional

吊顶：镜面不锈钢、亚克力顶板
轿壁：木纹装饰板，本色镜面蚀刻不锈钢，本色镜面不锈钢
地板：PVC（可选大理石）

Ceiling:Acrylic transparent board,mirror stainless steel
Car wall: wooden decoration board,mirror etching, mirror etching stainless steel
Floor:PVC(optional marble)



SG-K14 选配 Optional

吊顶：玫瑰金镜面不锈钢框架、LED 照明
轿壁：玫瑰金发纹不锈钢、玫瑰金镜面蚀刻
地板：PVC（可选大理石）


Ceiling:Rose gold mirror stainless steel frame,LED lighting
Car wall: Rose gold pattern stainless steel,rose gold mirror etching
Floor:PVC(optional marble)



SG-K15 选配Optional

吊顶：本色发纹，蓝色镜面，配筒灯
轿壁：本色发纹不锈钢，蓝色镜面不锈钢，黑色装饰条
地板：PVC（可选大理石）

Ceiling:Hairline stainless steel,blue mirror, lighting
Car wall:Hairline stainless steel,blue mirror,blue mirror etching,black line
Floor:PVC(optional marble)

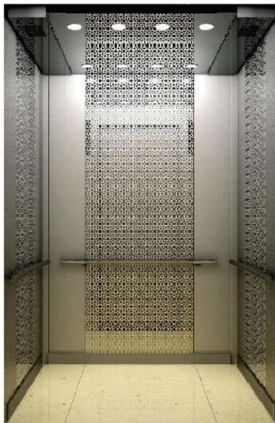

SG-K12 选配Optional

吊顶：镜面顶板、筒灯
轿壁：镜面蚀刻与发纹不锈钢组合
扶手：发纹不锈钢扶手
地板：PVC（可选大理石）

Ceiling: Mirror stainless steel, LED light
Car wall:Mirror etching+hairline stainless steel
Handrail: hairline stainless steel tube
Floor:PVC(optional marble)



SG-K13 选配Optional

吊顶：镜面顶板、筒灯
轿壁：胡桃木饰面与镜面不锈钢组合
后侧镜面板与喷砂不锈钢组合
地板：PVC（可选大理石）

Ceiling: Mirror stainless steel, LED light
Car wall:wooden decoration board, mirror stainless steel back side mirror stainless steel+Sandblasted stainless steel
Floor:PVC(optional marble)



SG-K16 选配 Optional

吊顶：宽幅拱形白色透光板的柔光照明设计
轿壁：钛金，镜面，蚀刻，发纹，和纹
扶手：圆木和钛金组合扶手
地板：PVC（可选大理石）

Ceiling:Soft lighting design of wide arched white translucent board
Car wall:Titanium,mirror,etching,hairline and pattern
Handrail:Round wood and titanium combined handrail
Floor:PVC(optional marble)



SG-K17 选配 Optional

吊顶：钛金镜面镂空板，亚克力透光板
轿壁：镜面，蚀刻，发纹不锈钢，钛金
扶手：钛金不锈钢三管
地板：PVC（可选大理石）

Ceiling:Titanium mirror hollow board,acrylic transparent board
Car wall:Mirror,etching,hairline stainless steel,titanium
Handrail:Titanium stainless steel three tubes
Floor:PVC(optional marble)



SG-K18 选配 Optional

吊 顶： 钢板烤漆框架, 黑钛镜面装饰, 回光灯带
轿 壁： 后壁, 黑钛短丝发纹、黑钛镜面装饰条、夹丝 玻璃镜面、
木饰面、回光灯带
地 板： PVC (可选大理石)

Ceiling:Steel plate paint frame,black titanium mirror decoration,backlight
Car wall:Backwall,black titanium short wire hairline,black titanium mirror
decorative strip,wire glass mirror,wood veneer,backlight strip
Floor:PVC(optional marble)



SG-K19 选配 Optional

吊 顶： 褐色发纹不锈钢, 烤漆钢板, 透光云石板,LED照明
侧 壁： 黑钛镜面不锈钢,褐色发纹不锈钢条,蜂窝大理石
扶 手： 褐色发纹不锈钢圆管
地 板： PVC (可选大理石)


Ceiling:Brown hairline stainless steel,painted steel plate,translucent
marble plate,LED lighting
Side wall:Black titanium mirror stainless steel,brown hairline stainless
steel strip,honeycomb marble
Handrail:Brown hairline stainless steel round tube
Floor:PVC(optional marble)



SG-K22 选配 Optional

吊 顶： 镜面不锈钢框架,亚克力透光板
轿 壁： 实木饰面, 镜面不锈钢
扶 手： 发纹不锈钢单管
地 板： PVC (可选大理石)

Ceiling:Mirror stainless steel,acrylic transparent board
Car wall:wooden decoration board,Solid wood veneer,mirror
stainless steel
Handrail: Hairline stainless steel single tube
Floor:PVC(optional marble)

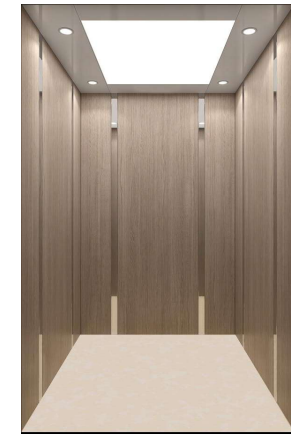

SG-K23 选配 Optional

吊 顶： 本色镜面不锈钢边框及透光顶板, LED灯
轿 壁： 木纹装饰板, 本色镜面不锈钢
地 板： PVC (可选大理石)


Ceiling:Mirror stainless steel, acrylic transparent board
Car wall:wooden decoration board,mirror stainless steel
Floor:PVC(optional marble)



SG-K20 选配 Optional

吊 顶： 古铜色发纹不锈钢, 镜 面,LED照明, 回光灯带
轿 壁： 古铜色发纹不锈钢, 木饰面, 回光 带
扶 手： 古铜色发纹不锈钢圆管
地 板： PVC (可选大理石)

Ceiling:Bronze hairline stainless steel,mirror,LED lighting,backlight strip
Car wall:Bronze hairline stainless steel,wood veneer,backlight strip
Handrail:Bronze hairline stainless steel round tube
Floor:PVC(optional marble)

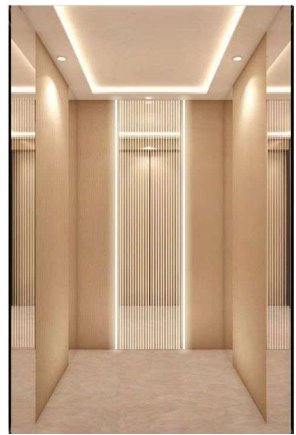

SG-K21 选配 Optional

轿 顶： 白色木饰面, 回光灯带, 筒灯
轿 壁： 香槟金发纹, 香槟金镜面, 香槟金镜面蚀刻
不 锈钢, 回光灯带
地 板： PVC (可选大理石)

Ceiling:white wood ceiling,LED light
Car wall:Champagne gold hairline,champagne gold mirror
stainless steel
Floor:PVC(optional marble)



SG-K24 选配 Optional

吊 顶： 香槟金不锈钢边框, LED筒灯
轿 壁： 木饰面, 雾面香槟金不锈钢
扶 手： 不锈钢圆管扶手
地 板： PVC (可选大理石)

Ceiling:Wooden frame,LED downlight
Car wall:Wood veneer,matte stainless steel plated with champagne gold
Handrail:Stainless steel round tube with titanium plating
Floor:PVC(optional marble)



SG-K25 选配 Optional

吊 顶： 镜面不锈钢框架, 亚克力透光板
轿 壁： 实木饰面, 镜面不锈钢
扶 手： 不锈钢圆管扶手
地 板： PVC (可选大理石)

Ceiling:Mirror stainless steel frame,acrylic transparent board
Car wall:Solid wood veneer,mirror stainless steel
Handrail:Stainless steel round tube handrail
Floor:PVC(optional marble)

观光电梯轿厢装潢
Observation elevator car decoration



SG-G01 选配 Optional

上下罩：钢板喷漆
观光壁：发纹不锈钢，安全夹胶玻璃
装饰顶：发纹不锈钢框架，暗藏灯带，LED
轿厢壁：发纹不锈钢
扶手：不锈钢单管
地板：PVC 地板(可选大理石)

Upper and lower cover:Steel platespray paint
Observation wal:Hairline stainless steel, safety laminated glass
Decorative top:Hairline stainless steel frame, hidden light strip,LED
Car wal:Hairline stainless steel
Hand:Stainless steel single tube
Floor:PVC floor(optional marble)



SG-G02 选配 Optional

上下罩：钢板喷漆，不锈钢围板
观光壁：安全夹胶玻璃
装饰顶：发纹不锈钢框架，亚克力透光板，LED
轿厢壁：发纹不锈钢
扶手：不锈钢单管
地板：PVC 地板(可选大理石)

Upper and lower cover:Steel platespraying, stainless steelenclosure
Sightseeing wal:Safety laminated glass
Decorative top:Hairline stainless steel frame, acrylic transparent board,LED
Car wal:Hairline stainless steel
Hand:Stainless steel single tube
Floor:PVC floor(optional marble)



SG-G03 选配 Optional

上下罩：钢板喷漆，亚克力灯饰
观光壁：发纹不锈钢，安全夹胶玻璃
装饰顶：发纹不锈钢框架，亚克力透光板，LED
轿厢壁：发纹不锈钢
扶手：不锈钢单管
地板：PVC 地板(可选大理石)

Upper and lower cover:Steel spraying, acrylic lighting
Observation wall:Hairline stainless steel, safety laminated glass
Decorative top:Hairline stainless steel frame, acrylic transparent board,LED
Car wall:Hairline stainless steel
Hand:Stainless steel single tube
Floor:PVC floor(optional marble)



SG-G04 选配 Optional

上下罩：钢板喷漆
观光壁：安全夹胶玻璃
装饰顶：玫瑰金镜面不锈钢框架，亚克力透光板，LED
轿厢壁：玫瑰金发纹不锈钢
扶手：不锈钢单管
地板：PVC 地板(可选大理石)

Upper and lower cover:Steel platespraying
Sightseeing wall:Safety laminated glass
Decorative top:Rose gold mirror stainless steel frame acrylic transparent board,LED
Car wall:Rose gold pattern stainless steel
Hand:Stainless steel single tube
Floor:PVC floor(optional marble)

观光电梯轿厢装潢
Observation elevator car decoration



SG-G05

选配 Optional

上下罩：发纹不锈钢
观光壁：3块胶合玻璃带立柱
轿壁：发纹不锈钢
吊顶：发纹不锈钢带亚克力灯饰、筒灯
扶手：发纹落地扶手
地板：PVC（可选大理石）

Upper and lower cover: Hairline stainless steel
Observation wall: Three safety laminated glass (6+6)
Decorative roof: Mirror stainless steel, acrylic, LED downlight
Car wall: Hairline stainless steel
Handrail: Hairline stainless steel
Floor: PVC (optional marble)



SG-G06

选配 Optional

上下罩：镜面不锈钢
观光壁：180度圆弧玻璃
轿壁：发纹不锈钢
吊顶：发纹边框带亚克力灯饰
扶手：发纹圆管扶手
地板：PVC（大理石可选）

Upper and lower covers: Mirror stainless steel
Sightseeing wall: Tempered laminated glass
Decorative roof: Mirror stainless steel, acrylic, LED downlight
Car wall: Hairline stainless steel
Handrail: Stainless steel handrail
Floor: PVC (optional marble)



SG-G07

选配 Optional

上下罩：发纹不锈钢带镜面装饰
观光壁：3块胶合玻璃组合
轿壁：发纹不锈钢
吊顶：发纹边框带隐藏式灯带、筒灯
扶手：发纹圆管扶手
地板：PVC（可选大理石）

Upper and lower cover: Hairline stainless steel with mirror decoration
Observation wall: Three safety laminated glass (6+6)
Car wall: Hairline stainless steel
Handrail: Stainless steel double tube
Floor: PVC (optional marble)



SG-G08

选配 Optional

上下罩：乳白色亚克力
观光壁：5块胶合玻璃组合
装饰顶：发纹边框带亚克力顶板、筒灯
轿厢壁：钛金发纹不锈钢
扶手：发纹圆管扶手
地板：PVC（可选大理石）

Upper and lower cover: Hairline stainless steel
Sightseeing wall: Five safety laminated glass (6+6)
Decorative roof: Hairline stainless steel frame with acrylic light decoration
Car wall: Hairline stainless steel
Handrail: Stainless steel single tube
Floor: PVC (optional marble)

操纵箱&召唤盒系列

COP & LOP series

分体式操纵箱

Split control box



SG-C01

SG-W01A

选配 / Optional
发纹不锈钢
Hairline stainless steel

分体式操纵箱

Split control box



SG-C02

SG-W02

选配 / Optional
玫瑰金色不锈钢
Rose gold stainless steel



SG-W02A

分体式操纵箱

Split control box



SG-C03

SG-W03

选配 / Optional
发纹不锈钢
Hairline stainless steel



分体式操纵箱

Split control box



SG-C04

SG-W04

选配 / Optional
玫瑰金色不锈钢
Rose gold stainless steel



分体式操纵箱

Split control box



SG-C05

SG-W05

选配 / Optional
钛金色不锈钢
Titanium gold stainless steel



厅外显示器

Outdoor display



AL01



AL02



AL03



AL04

扶手系列

Handrail series



SG-HR01

Stainless steel tube matt short grain



SG-HR02

Stainless steel tube matt short grain
double combination



SG-HR03

Titanium matt short grain single tube



SG-HR04

Stainless steel short grain flat handrail



SG-HR05

Round wood, titanium gold combination



SG-HR06

European pattern, round wood handrail



SG-HR07

Sightseeing ladder handrail



SG-HR08

Sightseeing ladder handrail



SG-HR09

Sightseeing ladder handrail

地板系列

Floor series

材料: PVC(或大理石): 优点: 防水, 防火, 防霉, 防虫

Material: PVC(ormarble); Advantages: waterproof, fireproof, mildew proof, insect proof



SG-D01



SG-D02




SG-D03



SG-D04



SG-D05




SG-D06



SG-D07



SG-D08



SG-D09



SG-D10



SG-D11



SG-D12

厅门系列

Landing door series



SG-TM02

标配/Standard

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM03

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM04

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching



SG-TM08

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM09

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM10

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching



SG-TM05

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM06

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching

SG-TM07

选配/Optional

发纹不锈钢蚀刻

Hairline stainless steel etching



SG-TM11

选配/Optional

黑钛发纹不锈钢

Black titanium hairline stainless steel

SG-TM12

选配/Optional

古铜色不锈钢蚀刻

Bronze stainless steel etching

SG-TM13

选配/Optional

香槟金发纹不锈钢蚀刻

Champagne gold pattern stainless steel etching

厅门系列

Landing door series



SG-TM14

标配/Standard

玫瑰金不锈钢蚀刻

Rose gold stainless steel etching

SG-TM15

选配/Optional

玫瑰金不锈钢蚀刻

Rose gold stainless steel etching

SG-TM16

选配/Optional

玫瑰金不锈钢蚀刻

Rose gold stainless steel etching



SG-TM20

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM21

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM22

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching



SG-TM17

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM18

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM19

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching



SG-TM23

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM24

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

SG-TM25

选配/Optional

钛金不锈钢蚀刻

Titanium stainless steel etching

乘客电梯功能表

Passenger elevator function table

标准功能

Standard Function

 运行功能 Travel function	电梯变频驱动 VVVF drive	精确调整电动机转速,令电梯启动、运行、停止时的速度曲线平稳、圆滑,获得良好的舒适感。 Motor rotating speed can be precisely adjusted to get smooth speed curve in elevator start,travel and stop and gain the sound comfort.
	门机变频驱动 VVVF door operator	精确调整电动机转速,使门机的开启、关闭更轻柔灵敏。 Motor rotating speed can be precisely adjusted to get the more gentle and sensitive door machine start/stop.
	独立运行 Independent running	通过动作开关,使电梯不响应外召,尽响应轿内指令。 The elevator can not respond to outer calling,but only respond to the command inside the car through the action switch.
	自动不停站通过 Automatic pass without stop	当轿内挤满乘客或负载接近预定值,为保持最大运行效率,该轿厢将自动越过召唤层站。 When the car is crowded with the passengers or the load is close to preset value,the car will automatically pass the calling landing in order to keep maximum travel efficiency.
	开门时间自动调整 Automatically adjust door opening time	按照层站召唤或轿厢召唤的区别,自动调整保持开门时间。 Door-open time can be automatically adjusted according to the difference between landing calling or car calling.
	本层重开门 Reopen with hall call	关门途中,可以按本层站召唤按钮使门重新开启。 In the door shutting process,press reopen with hall call button can restart the door.
	即时关门 Express door closing	电梯停站开门到位时,按下关门按钮,门立即被关闭。 When the elevator stops and opens the door,press door-shut button,the door will be closed immediately.
	停梯开门 Car stops and door open	电梯减速平层,直到完全停稳后才开门。 The elevator decelerates and levels,the door only opens after the elevator comes to a complete stop.
	轿厢到站钟 Car arrival gong	装于轿顶的电子钟的钟声告知候梯的乘客电梯已到达。 Arrival gong in the car top announces that the passengers arrive.
	直接停靠 Direct parking	完全根据距离原则,平层无爬行,大大提高了运行效率。 It completely accords with distance principle with no crawling in the leveling. It greatly enhances the travel efficiency.
 安全功能 Safety function	光幕保护 Photo-cell protection	门开启和关闭期间,用覆盖整个门高度的红外光幕探测乘客和物体的门保护装置。 In the door open and shut period,infrared light that covers the whole door height is used to probe the door protection device of both the passengers and objects.
	指定停靠 Designated stop	由于某种原因,电梯在目的层无法开门,电梯将关门运行至下一指定层楼。 If the elevator can not open the door in the destination floor out of some reason,the elevator will close the door and travel to the next designated floor.
	超载停梯 Overload holding stop	轿厢超载时,鸣响蜂鸣器并停止于该层站。 When the car is overload,the buzzer rings and stops the elevator in the same floor.
	防止失速内部计数器保护 Anti-stall timer protection	由于曳引钢丝绳打滑而无法正常运行时,电梯停止运行。 The elevator stops operation due to slippery traction wire rope.
	启动保护控制 Start protection control	电梯启动后在指定的时间内,没有离开门区,电梯停止运行。 If the elevator does not leave door zone within the designated time after it gets started,it will stop the operation.
	检修操作 Inspection operation	当进入检修状态时,轿厢以低速点动运行。 When the elevator enters into inspection operation,the car travels at inching running.
	故障自诊断 Fault self-diagnosis	控制器可记录最新的62个故障,以便快速排除故障,迅速恢复电梯运行。 The controller can record 62 latest troubles so as to quickly remove the trouble and restore the elevator operation.
	电梯门重复开关 Repeated door closing	有时因阻碍或干扰,电梯门未能关闭,电梯门会重复打开或关闭,直到杂物被清除。 If the elevator can not close the door due to certain obstacle or interference,the elevator will reopen or re-shut the door until sundries are eliminated.
	上下越层及上下极限保护装置 Up/down over-run and final limit protection	该装置可有效地防止当电梯万一发生失控时的冲顶或撞底现象,使电梯更安全可靠。 The device can effectively prevent from the elevator's surging to the top or knocking the bottom when it is out of control.It results in more safe and reliable elevator travel.
	下行超速保护装置 Down over-speed protection device	当电梯下降运行的速度超过额定速度的1.3倍时,该装置自动切断控制电源,使电机停止运转,安全钳动作,强制电梯停止运行,确保安全。 When the elevator downs 1.3 times higher than the rated speed,this device will automatically cut off control mains,stop the motor running,safety clings act to force the elevator stop in order to ensure the safety.
 人机界面 Man-machine interface	上行超速保护装置 Upward over-speed protection device	当电梯上行的速度超过额定速度的1.3倍时,该装置自动将电梯减速或制停。 When the elevator up speed is 1.3 times higher than rated speed,the device will automatically decelerate or brake the elevator.
	轿内及层站微动指令按钮 Micro-touch button for car call and hall call	轿内操纵箱指令按钮及层站召唤按钮采用新型微动型按钮。 Novel micro-touch button is used for operation panel command button in the car and landing calling button.
	轿内层楼、方向指示 Floor and direction indicator inside car	轿内显示电梯所在层楼及当前运行方向。 The car shows the elevator floor location and current travel direction.
	层站层楼、方向指示 Floor and direction indicator in hall	层站显示电梯所在层楼及当前运行方向。 The landing shows the elevator floor locating and current travel direction.

标准功能

Standard Function

 应急功能 Emergency function	应急照明 Emergency car lighting	停电时,自动打开轿内应急照明。 Emergency car lighting automatically activated once power failure.
	点动运行 Inching running	当进入紧急电动状态时,轿厢以低速点动运行。 When the elevator enters into emergency electric operation,the car travels at low speed inching running.
	五方通话装置 Five way intercom	通过对讲机,可以让轿内、轿顶、电梯机房、井道底坑、救援值班室之间通话。 Communication amid car,car top,elevator machine room,well pit and rescue duty room through walkie-talkie.
 节能功能 Energy-saving function	警铃 Bell	紧急时,连续按下轿内操纵箱上的警铃按钮,安装于轿厢顶上的电铃会鸣响。 In emergency conditions,if bell button above car operation panel is continuously pressed,electric bell rings on top of the car.
	消防返回 Fire emergency return	启动基站或监控屏上的钥匙开关,所有召换均被取消,电梯立即驶往指定救援层站停靠,并自动开门。 If you start key switch in main landing or monitor screen,all the callings will be cancelled.The elevator directly and immediately drives to the designated rescue landing and automatically opens the door.
	轿厢风扇/照明自动开关 Car ventilation, light automatic shut off	在规定的时间内没有召换或指令信号,轿厢内的风扇和照明会自动关闭,以节能。 If there is no calling or command signal within the stipulated time,the car fan and lighting will be automatically closed in order to save the energy.
	远程关闭 Remote shut-off	通过钥匙开关,电梯可以被召换到基站(服务完成后),并自动退出服务。 The elevator can be called to main landing (after finishing the service) through the key switch and automatically exists the service.

选配功能

Optional Function

 应急功能 Emergency function	停电应急平层开门 Emergency leveling for power failure
	一键救援拨号 One-key rescue dial
	电源降压自适应运行 Power supply step-down adaptive operation
	超时不运行提醒 Do not run reminder over time

 安全监控功能 Emergency function	5G物联网远程监控 5G IoT remote monitoring
	轿内摄像 Camera inside the car
	人脸识别,人体测温 Face recognition, human body temperature measurement
	负离子消毒 Negative ion disinfection

 运行功能 Run function	语音报站 Voice announcement
	轿厢副操纵盘 Car auxiliary control panel
	残疾人操纵箱 Handicapped control box
	曳引绳滑动检测 Traction rope sliding detection
	轿厢异常移动保护 Car abnormal movement protection

 便捷安装调试功能 Run function	电梯智能调试终端 Elevator intelligent debugging terminal
	电梯体检 Elevator medical examination
	智能终端异地指导 Intelligent terminal remote guidance
	电梯部件维保绑定 Elevator component maintenance binding
	故障分析专家系统 Fault analysis expert system
	电梯调试工具包 Elevator debugging toolkit
	电梯性能评价功能,完全兼容美国PMT(震动检测仪) Elevator performance evaluation function,fully compatible with American PMT (Vibration Tester)

载货电梯

Freight Elevator


产品六

智载千斤 游刃有余

It intellectually bears any heavy loads at ease

斯格载货电梯是根据中国货梯市场需求特点, 结合公司多年电梯生产经验, 生产制造可靠货梯产品, 可在各种恶劣环境下进行货物运输的工作。具有安全可靠、结构强度高、经久耐用、运行平稳、开门距大、性价比高等优点, 成为工厂、仓库、商场、物业中心等地方运输货物的理想选择。

SIGE freight elevator is based on China's transfer market demand characteristics, combined with the company many years production experience, reliable manufacturing goods elevator products, able to conduct freight transportation under various harsh environment of the work. With safe and reliable, high strength, durable structure, smooth operation, big door width and high cost performance advantages, becoming the center of the factories, warehouses, shopping malls, property place such as the ideal choice for shipping goods.

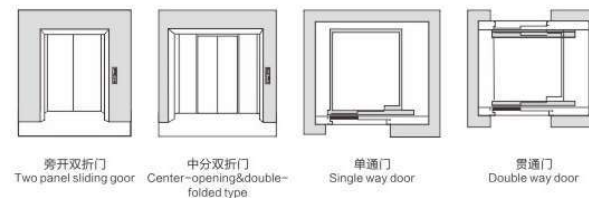

大宽度开门 大自由进出

Large width door opening free entry/exit

为方便大体积货物的自由进出, 斯格载货电梯系列产品均采用多折式轿厢结构, 让轿门打开可达到最大宽度。

For the convenience of free entry/exit of large bulk freight, SIGE freight elevator series apply multi-folded car structures which can make the car door reach the maximum width while opening.

载货电梯参数表

Freight elevator specifications

载重量 Capacity kg	速度 Speed (m/s)	轿厢净尺寸 Car net size	净开门(宽x高) Entrance(DWxXH)mm		井道净尺寸 (mm) Shaft inside dimension			机房尺寸 (mm) Machine room size		最大提升 高度(m) Max traveling height
		(宽x深) (CWxSD)mm	旁开两折门 2P telescopic opening	中分四折门 4P Center opening	(宽x深) (SWxSD)	顶层高 OH	底坑 PD	宽x深 (MWxMD)mm	高 (MH)mm	
630	0.5(1.0)	1100x1400	1100x2100	—	2100x1940	4500	1500	2800x3500	2900	30(45)
		1400x1100	—	900x2100 二折门	2000x1720					
1000	0.5(1.0)	1300x1700	1300x2100	—	2400x2290	4500	1500	3100x4000	2900	30(45)
		1600x1400	—	1000x2100 二折门	2200x2100					
2000	0.5(1.0)	1800x2200	1500x2100	—	2700x3240	4500	1500	3500x4500	2900	30(45)
		1800x2200	1500x2100	—	2850x2800					
3000	0.5	2000x2900	1600x2100	—	2850x3600	4500	1600	3500x5000	2900	30
			—	1800x2100	3200x3600					
5000	0.25(0.5)	2400x3600	—	2400x2400	4000x4200	4800	1700	4500x5000	2900	30

土木示意图仅供参考 The civil diagrammatic sketch is for reference only.

汽车电梯

Automobile elevator

产品七

斯格汽车电梯，运用新型的数据网络系统，电梯的各层站和轿厢均设有电脑控制系统（CPU），并通过串行传输线进行连接，减少了各部件之间的连线，使系统的控制更加高效和精确；各电脑之间所配置的诊断程序和后备系统，确保电梯各部件联系的高度可靠性。每一台电脑还专门设置具有推理能力的软件，丰富和完善了人（车）梯接口。

将先进的大规模可编程门阵列运用到汽车电梯上，实现了系统的单片化，有效提高系统的抗干扰能力，操作更加简单，反应更加灵敏。

SIGE automobile elevator uses a new type of data network system. Each landing and car of the elevator is equipped with a computer control system (CPU), which is connected through a serial transmission line, which reduces the connection between various components and makes the system control more efficient and accurate; the diagnostic program and backup system configured between the computers ensure the high reliability of the connection of the elevator components. Each computer is also specially set up with software with reasoning ability, which enriches and perfects the human (vehicle) ladder interface.

The application of the advanced large-scale programmable gate array to the automobile elevator realizes the monolithic system of the system, effectively improves the anti-interference ability of the system, and makes the operation easier and the response more sensitive.



平稳高效



安全便捷



汽车电梯参数表

Automobile elevator specifications

载重量 Capacity kg	速度 Speed (m/s)	轿厢净尺寸 Car net size	净开门(宽x高) Entrances(DWxDH)mm	井道净尺寸 (mm) Shaft inside dimension			机房尺寸 (mm) Machine room size		最大提升 高度(m) Max traveling height
		(宽x深x高) (CWxCDxCH)mm	中分四扇门 4P Center opening	(宽x深) (SWxSD)	顶层高 OH	底坑 PD	宽x深 (MWxMD)mm	高 (MH)mm	
3000	0.5	2630x5390x2300	2400x2200	4100x6200	4800	1700	4100x6200	3000	30
5000	0.25	3430x6790x2300	2600x2200	4750x7600	5100	1700	4750x7600	3200	30
	0.5								

土建示意图仅供参考 The civil diagrammatic sketch is for reference only.

载货电梯轿厢配置

Freight elevator car configuration



SG-F01

标配 Standard

旁开式

Side opening

吊顶：钢板喷漆（颜色可选）

通风：圆形风扇

轿壁：钢板喷漆（颜色可选）

轿门：钢板喷漆（颜色可选）

轿底：花纹钢板

地坎：铁制

操纵箱、外呼：LG-FC01

Car top: Painted Steel (optional color)

Ventilation: Round fan

Car wall: Painted Steel (optional color)

Car door: Painted Steel (optional color)

Car bottom: Checked steel plate

Sill: Iron

Cop.Hop: LG-FC01



SG-F02

选配 Optional

中分双折式

Center-opening & double-folded type

吊顶：发纹不锈钢

通风：圆形风扇

轿壁：发纹不锈钢

轿门：发纹不锈钢

轿底：花纹钢板

地坎：铸铁

操纵箱、外呼：LG-FC01

Car top: Hairline stainless steel

Ventilation: Round fan

Car wall: Hairline stainless steel

Car door: Hairline stainless steel

Car bottom: Checked steel plate

Sill: Cast iron

Cop.Hop: LG-FC01

轿厢配置

Car configuration

操纵箱 Operation panel (COP)



SG-FC01

(标配 Standard)

发纹不锈钢 Hairline stainless steel

SG-FC02

(选配 optional)

发纹不锈钢 Hairline stainless steel

地板 Floor



不锈钢花纹板
Stainless steel checkered plate

厅门系列 Landing door series



SG-FT01

中分式 Center opening

喷涂钢板 Sprayed steel plate



SG-FT02

旁开式 Side opening

喷涂钢板 Sprayed steel plate



SG-FT03

中分双折式 Center-opening & double-folded type

发纹不锈钢 Hairline stainless steel



SG-FT04

中分三折式 Center-opening & three folded type

发纹不锈钢 Hairline stainless steel

可选防撞条

Optional crash barrier



木质 Wooden



黑色橡胶 Black rubber

色标系列 Color standard series

象牙黄 Ivory yellow LS001	骨色 Bone color LS002	浅灰 Light grey LS003
浅绿 Light green LS004	海蓝 Blue LS005	亚光黑 Matte black LS006

载货汽车电梯功能表

Freight / Automobile elevator function table

标准功能

Standard Function

 运行功能 Travel function	自动运行 Automatic operation	电梯在无人操控的情况下，按照给出的指令自动运行，将自动到目的层。 When there is no attendant who operate elevator, elevator will run to the destination floor according to the instruction of passengers automatically.
	司机运行 Attendant running	电梯由司机进行操控，司机按要给出指令，电梯按指令要求驶向目的层。 Elevator is operated by attendant, attendant press car calls as request of passengers and elevator will run to the destination floor according to the car calls.
	开门时间自动调整 Automatic adjustment of door opening time	按照层站召唤或轿厢召唤的区别，自动调整保持开门时间。 According to current registered landing call and call call situation, system will automatically adjust the door open holding time.
	本层重开门 Door re-open at same floor	关门途中，可以按本层站召唤按钮使门重新开启。 When door is closing, door can re-opened by pushing landing call button at current floor.
	轿厢到站钟 Car arrival gong	装于轿顶的电子钟的钟声告知乘客电梯已到达。 Arrival gong on the car top announce passengers that the elevator have arrived.
	指令误登记消除 Cancel the error command	误按了轿内楼层指令按钮，重新按一次，即可撤销误选登记。 If passengers press the wrong floor button in car, same button press it again can cancel the wrong register.
	驻停 Parking	关闭电锁后电梯进入驻停状态，电梯不再响应任何外呼。 When electric key switch is turn off, elevator enters into parking state, it will not serve to any landing call.
 安全功能 Safety function	光幕保护 Light curtain protection	光幕被遮挡时，关门动作立即停止且自动开门。 Door will stop closing at once and automatically open, when light curtain is sheltered.
	超载停驶 Overload stop	轿厢超载时，电梯门常开，蜂鸣器鸣响并停止于该层站。 When elevator is overload, elevator door keeps opening, buzz peal and elevator stops at this floor.
	检修操作 Inspection operation	当进入检修状态时，轿厢以低速点动运行。 When elevator enters into inspection state, car running at slow speed.
	故障自诊断 Troubleshooting	控制器可记录故障，以便快速排除故障，迅速恢复电梯运行。 Controller can record faults in memory to facilitate the fault elimination and restore elevator running.
	故障自动停驶 Auto-stop with fault	运行中系统发生故障，安全回路有效的前提下，电梯就近平层开门。 When there is any fault occurred during the elevator running, when safety circuit is valid, elevator lands to the nearest floor.
	重复开/关门 Repeat open / close door	关门过程中，有时因阻碍或干扰，电梯门会重复打开或关闭。 On normal mode, after running door close command, if door inter-lock circuit isn't connected, elevator opens door and closes it again.
	上下越层及上下极限保护装置 Top/bottom limit and final limit protection	该装置可有效防止当电梯万一发生失控时的冲顶或撞底现象，使电梯更安全可靠。 The devices can prevent elevator from crashing to the top or bottom of hoistway in case that elevator is out of control with fault. It ensures the safety and reliability.
	下行超速保护装置 Down over speed running protection	当电梯下降运行超速时，该装置自动切断控制电源，使电机停止运转，安全钳动作，强制电梯停止运行，保障安全。 When elevator runs down in over speed, this device cuts off the control power to stop the motor running, safety gear act to force elevator to stop and ensure the safety.
	上行超速保护装置 Up running over speed protection device	当电梯上行超速时，该装置自动将电梯减速或制停。 When elevator runs up in over speed, the device forces elevator to decelerate and braking.
	安全回路保护 Safety circuit protection	安全回路断开，或安全回路接触器粘连，电梯立即停止。 When elevator circuit is break or contacts are adhered, elevator stops running at once.
 人机界面 Man-machine interface	门联锁保护 Door interlock protection	门全部关闭，电梯方可运行，或门联锁接触器粘连，电梯立即停止。 Only all doors are completely closed, elevator can run. when door interlock contacts are adhered, elevator stops running at once.
	主接触器保护 Main contactor protection	系统随时检测主接触器动作是否可靠，发现异常，立即停止运行。 System detects if the main contactor acts reliably, if any abnormal is detected, elevator stops running at once.
	抱闸检测保护 Brake detecting protection	对抱闸臂的打开和闭合实时检测，若发生异常，或抱闸接触器粘连，电梯禁止启动。 System detects the brake state, if there is any abnormal or braking contacts are adhered, elevator can't start running.
	微动指令按钮 Micro push button	轿内操纵箱指令按钮及层站召唤按钮采用新型微动型按钮。 C.O.P. and H.O.P. both adopts new micro push button.
	运行状态显示 Running state display	系统能显示电梯运行方向、层楼、开关门、故障等信息。 System can indicates running direction, floor, door state, default etc.

 人机界面 Man-machine interface	不停层任意设定 No stop floor set	可根据用户需要任意设定不停靠层站。 Set the no stop floor according to the customer' requirement.
	待梯层任意设定 Homing floor set	可根据用户需要任意设定待梯层站。 Set the homing floor according to the customer' requirement.
	井道参数自主学习 Hoistway self-learning	通过自主学习，系统将测出各层楼的间距数据，并永久保存。 Through hoistway self-learning, system can measure out the distance between every floor and record the permanently.
 应急功能 Emergency function	应急照明 Emergency lighting	停电时，自动打开轿内应急照明。 When power is off, car emergency light twin on automatically.
	紧急电动运行 Emergency electric operation	当进入紧急电动状态时，轿厢以低速点动运行。 When elevator enters into emergency electric operation state, elevator runs in low speed inching running.
	五方通话装置 5-way intercom	通过对讲机，可让轿内、轿顶、电梯机房、井道地坑、救援值班室之间通话。 Communication between car inner, car top, machine room, pit and security room through intercom is realized.
	警铃 Alarm bell	紧急时，连续按下轿内操纵箱上的警铃按钮，安装于轿厢顶上的警铃会鸣响。 In emergency situation, pressing the alarm bell button on C.O.P. continuously, alarm bell on car top will ring.
 节能功能 Energy-saving function	风扇、照明自动关闭 Fan & light automatic off	在规定的时间内没有召唤或指令信号，轿厢内风扇和照明会自动关闭，以节能。 If there is no car call or landing call in a preset time, car inner fan and light will be turn off automatically.

选配功能

Optional Function

 运行功能 Travel function	自动关门时间延长 Door close time extending	按轿厢内的专用按钮，可使门在一段时间内保持开门状态。 Press special button in the car, the door can prolong the opening state for a period.
	消防返回 Fire emergency return	消防状态下，所有召唤均被取消，电梯立即驶往指定救援层站停靠，并自动开门。 In fire emergency state, all landing calls are cancelled, elevator runs to the preset floor and open door automatically.
	并联功能 Duplex control function	用于两台电梯并联运行，减少候梯时间，以提高运行效率。 This function is for two elevators' duplex control, it can reduce waiting time and improve the running efficiency.
	贯通门控制 Opposite door control	通过对贯通门的设置，可控制贯通门在相应楼层的开、关动作。 By setting opposite system can control it's action on corresponding floor.
 人机界面 Man-machine interface	轿厢超载纵箱 Sub-C.O.P.	用于大载重量的电梯，以便让轿厢内人员更方便使用。 It is used for large load elevator, so that make more convenient for passengers.
	IC卡控制功能 IC card control	所有（部分）层站须经授权，必须用IC卡电梯方可运行。 All (part) of the floors need entry approval, only with IC card can run the elevator.
 应急功能 Emergency function	停电自动疏散装置 Automatic Rescue Device (ARD)	停电时，应急装置提供电源，电梯驶往最近层站，自动开门，疏散乘客。 When power is off, this device supplies power to elevator, elevator runs to the nearest floor, open its door and evacuates the passengers.
 监控功能 Monitor function	曳引机监控 Traction machine monitor	无机房电梯装于曳引机顶部的探头能随时监控曳引机动作状况。 The monitor for machine room less elevator installed on the traction machine top can monitor the traction machine state.

自动扶梯 Escalator

产品八

卓越性能，为畅行护航

Outstanding performance for both

斯格自动扶梯产品，是依据现行国际标准和国家标准，充分应用新型材料及国内外先进技术设计、制造。运行平稳，噪音低，经久耐用、维修方便。具有精巧的结构、精良的梯路、精致的带路、精美的外观造型，柔和现代气息的设计风格。一个安全、舒适、美观的自动扶梯让您天天享受悠闲、愉悦的时刻。

SIGE escalator products have been produced according to the current international standard and Chinese standard. It fully applies the novel materials and advanced technology both at home and abroad to design and manufacture the lifts. It has the features such as smooth running, low noise, fine durability, convenient repair, fine and exquisite structure, consummate lift-way, remarkable belt-way, attractive outline model, magnificent design style with gentle modern flavor. A safe, cozy and beautiful escalator can let you enjoy the pleasant and comfortable moment every day.

精密结构之美

The beauty of the precise structure

高强度金属结构，构建精密尺寸；超意识美学设计，与建筑物完美相融。


High strength metal structure constructs the precision sizes, super-conscious aesthetics design perfectly combines with the building.

科技感应之美

The beauty of science and technology of induction

装有故障显示器，能够准确分析运行状态并显示在屏幕上，确保及时有效地维保。

It installs trouble display which accurately analyzes the running condition and displays it on the screen. It ensures the prompt and effective repair and maintenance.



豪华大气之美

The beauty of the luxurious atmosphere

强化玻璃护壁板，豪华装饰胜人一筹。

Toughened glass wainscot and deluxe decoration are better than others.

高效安全之美

The beauty of effective security

自动启用/停止运行装置，位于楼层板附近装有自动传感器，乘客接近时能自动检测并运行，当乘客离开时会自动停止。

Automatic start/stop running device is near the floor plate. It installs automatic sensor. It automatically detects and operates when the passengers get closer. It automatically stops when the passengers leave.



自动人行道

Moving-walk

产品九

完美造型，带来更佳的承载体验

Perfect shape, bringing a better experience

依据最新出台的国内和国际标准，斯格自动人行道基于先进的工业技术，融合时尚品味，并在设计之初就将安全放在首位，通过了严格的现场测试，确保产品的最大安全性。

即使推着满满当当的手推车，也能让您顺畅、安全地带到大楼的每个角落，让您进入简约舒适的购物新境界。对于任何一次高品质的购物体验而言，斯格所提供的这一稳定可靠、经久耐用的解决方案都是不可或缺的。

According to the latest domestic and international standard, SIGE moving-walk, based on advanced industrial technology fusion fashion taste, and at the beginning of the design will be safe in the first place, through the scene of the strict test, to ensure that the biggest security products.

Even pushing full to the brim carts, turn your smooth, safe areas to each corner of the building, allowing you to enter simple and comfortable shopping realm. SIGE provided stable and reliable, durable solutions are indispensable for any high-quality shopping experience.

专用主机

Special-purpose host

安全保护功能齐全，驱动效率高，运行更平稳。

Complete safety protection functions, high drive efficiency, the more smooth running.

防滑槽设计

Anti-skid slot design

良好的防滑性能，确保了行人行走过程中畅通无阻。


The sound anti-skid properties ensure free travel of the passengers.

小倾斜梳齿

Small inclined comb-teeth

人性化设计，便于购物手推车的便捷出入。

The human-centered design is convenient for the shopping cart, push cart to promptly and conveniently enter into/exit from the auto-walk.

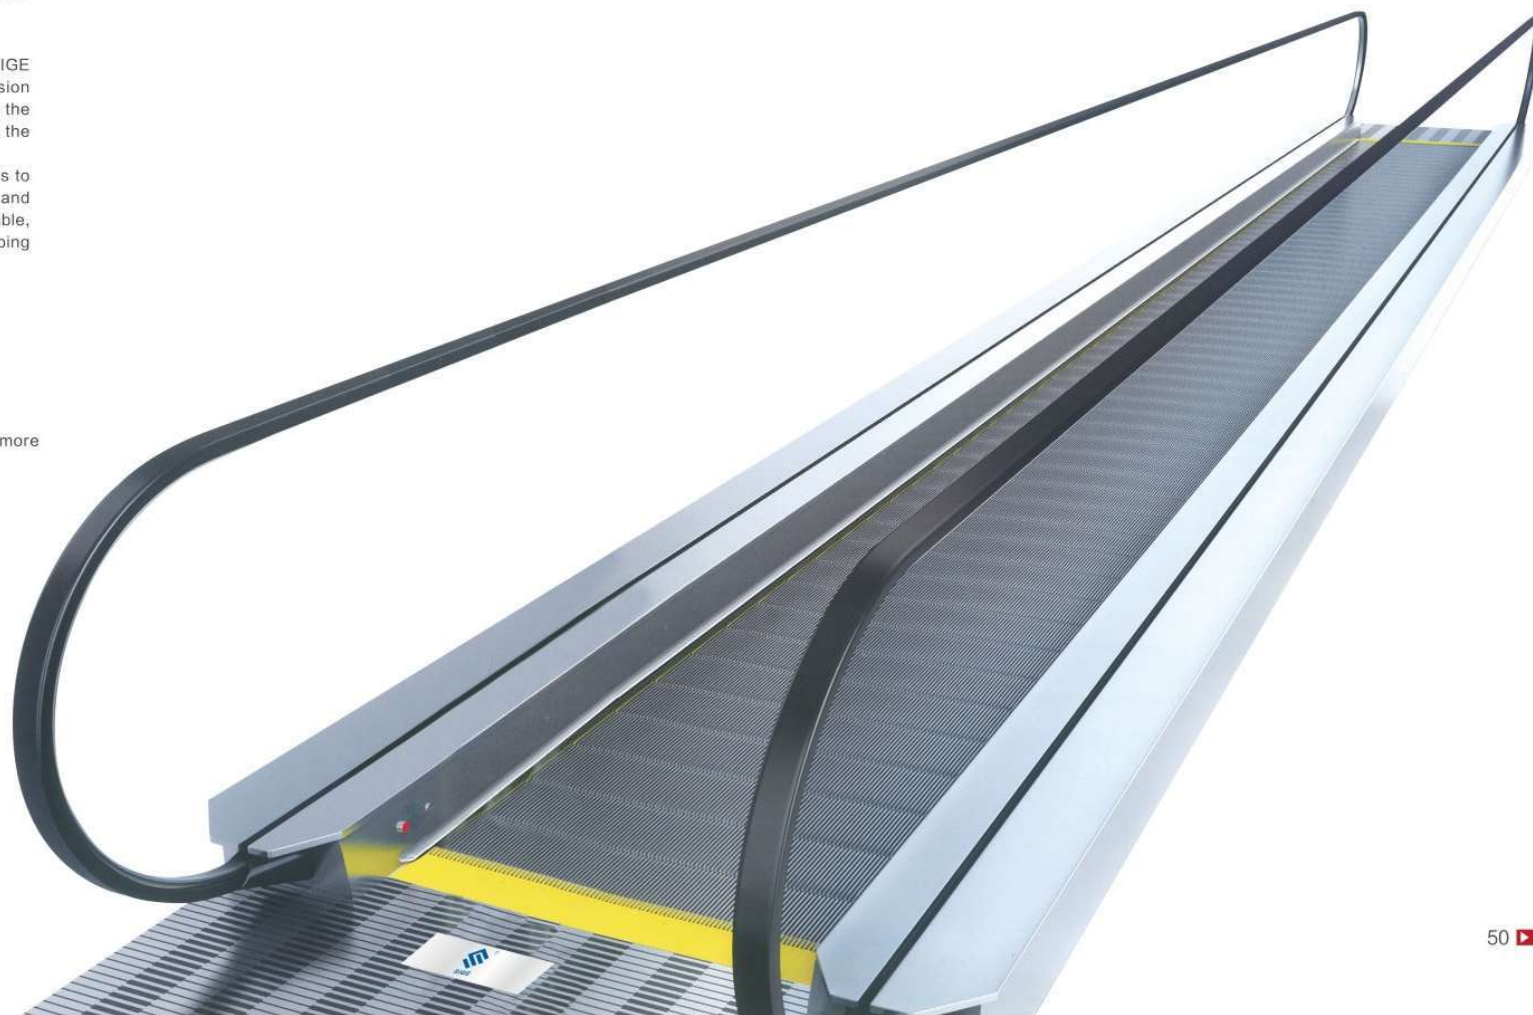

30° /35° Escalator construction sketch



- 1.当扶梯靠于二楼以上时,地机取消,土建下部结构与上部对称。
 - 2.在自动扶梯出入口应有充分通廊区域,其宽度不小于1238,深度从扶手带延伸到碰到前面障碍物不小于1500。
 - 3.自动扶梯扶手带至任何障碍物不小于500。
 - 4.电机AC380V 50Hz电机功率见表。
 - 5.由用户提供一电阻小于4欧姆接地装置。
 - 6.由用户提供至扶梯主开关的电源要求三相五线。
 - 7.所有尺寸单位用毫米,如有变化另行通知。
1. when the escalator is installed above the second floor, Don't have a pit. layout drawing must be matched between up and down
2. keep the sufficient space at both EXIT and ENTRANCE of escalator, the width must be less than 1238, the depth from handrail belt reversed end to the front obstacle must be not less than 1500.
3. space between handrail belt of escalator and obstacle must be not less than 500.
4. motor AC 380 V 50 Hz, see in the table.
5. by the user to provide a grounding resistance of less than 4 ohms.
6. provide by user to the main switch of the power requirements of 3 phases 5 wires.
7. all the dimensions are measured by MM.

12° Moving-walk construction sketch



- 1、当自动人行道装于二楼以上时，地坎取消，土建下部结构与上部对位。
2、当自动人行道出入口应到有充分畅通区域，其宽度不小于1310，深度从扶手带起向前到前面障碍物不小于2500。
3、自动人行道扶手带至任何障碍物不小于500。
4、由用户提供一个电源小于4欧姆接装置。
5、2600度取消支撑杆、R4、6、当提升高度2600<H≤5800mm，只需支撑杆，L1=L1-2=L3=3，当提升高度5800<H≤7800mm，需支撑杆R3、L4，L1=L1-2=L3=L3=3，此图为例行12" 标准人行道土建尺寸，若由于土建无法按标准执行，请及时联系斯梯梯技术部，各部位单位为毫米，若有变更，恕不告知。

1. When the moving walk is installed in the second floor and above, point is canceled. And the bottom and top of construction should be symmetrical. 2. sufficient unobstructed space is needed at entrance and exit of moving walk. The width should not less than 1310 and the depth from handrail belt swerving edge to any barrier should not less than 2500. 3. the distance between moving walk and any barrier should= 500. 4. User: needs to supply a earth connection equipment with resistance less than 4 ohm. 5. When the travelling height H= 2600 , cancel to supply R3,R4,R6. When the travelling height H= 3600 or H= 5800 we only need to supply R3 and R4. 6. When the travelling height 5800 < H = 7800, we only need to supply R3,R4 and R1. 7. 1120=1210+30. This plan is current 12" standard moving walk construction size. if the construction can not be executed, please contact Technology Department of SIGE elevator Co., Ltd. 9. The unit in this plan millimeter. We reserve right to change without prior notice.


电机功率 [KW] motor capacity	提升高度H1 (traveling height)		提升高度H2 (traveling height)		提升高度H3 (traveling height)	
	1000~3000	3000~3500	3500~4000	4000~4500	4500~5000	5000~5500
1000	1200	1158	1278	1600	1660	2310
800	800	956	1036	1400	1460	2110
600	600	756	836	1200	1260	1910
梯级宽度Step width	A	B	C	D	E	F
型 号 Model	提升高度mm traveling height	净重 KN	支持力 KN	电机功率KW motor capacity	运行速度 m/s	
NF(600)-30 (4500/h) 速度：0.5m/s	3000	57	46.4	8	2750	10900
	4000	60	49.44		2780	11800
	4000	64	52.47		2810	12880
	4500	68	56.50		2830	13800
	5000	71	59.53		2840	14860
	5500	75	62.56		2860	15880
NF(00)-30 (6750/h) 速度：0.5m/s	6000	79	65.59	11	2870	16900
	3000	58	52.47		2750	10900
	4000	63	56.50		2780	11800
	4500	71	64.57		2810	12880
	5000	74	67.60		2830	13870
	5500	78	70.63		2840	14860
NF(1000)-30 (9000/h) 速度：0.5m/s	6000	86	76.69	8	2860	15880
	3000	63	59.53		2750	10900
	4000	67	64.57		2780	11800
	4500	71	68.61		2810	12880
	5000	75	73.65		2830	13870
	5500	83	79.71		2840	14860
速度：0.5m/s	6000	87	78.74	11	2860	15880
	6500	92	86.79		2870	16890

 主要性能 [AM]	提升高度H traveling height	提升高度H traveling height
	1000~3000 5.0	1000~3200 5.0
	3000~4000 7.5	3000~4200 7.5
	4100~5200 11.0	4300~5400 11.0
	5300~6800 11.0	4500~7000 11.0
中心支撑 高度H1 center supporting height	6800~9000 15.0	7100~9200 15.0
	当提升高度为：2000~4×5800mm，需用一个中心支撑。当提升高度为：4×5800~7100mm，需用两个中心支撑。当提升高度为：7100~9000mm，需用三个中心支撑。	当提升高度为：2000~4×5800mm，需用一个中心支撑。当提升高度为：4×5800~7100mm，需用两个中心支撑。当提升高度为：7100~9200mm，需用三个中心支撑。
中心支撑 高度H2 center supporting height	当提升高度为：6800~4×5800mm，需用两个中心支撑。第一个中心支撑高度为：H1=3481mm，第二个中心支撑高度为：H2=3481mm。	当提升高度为：6800~4×5800mm，需用两个中心支撑。第一个中心支撑高度为：H1=3481mm，第二个中心支撑高度为：H2=3481mm。
	当提升高度为：5300~6800mm，需用两个中心支撑。第一个中心支撑高度为：H1=2651mm，第二个中心支撑高度为：H2=2651mm。	当提升高度为：5300~6800mm，需用两个中心支撑。第一个中心支撑高度为：H1=2651mm，第二个中心支撑高度为：H2=2651mm。
功耗 Power supply	用户供电380V AC 50Hz 三相五线制，电压波动±10%。正常使用时，电机电流在额定值的5%；大电流启动时最大启动电流是额定值的3.5倍。	用户供电380V AC 50Hz 三相五线制，电压波动±10%。正常使用时，电机电流在额定值的5%；大电流启动时最大启动电流是额定值的3.5倍。

技术说明	technical notes	
倾角 α dip angle	12°	
速度 V speed	0.5m/s	
梯级宽度 A step width	1000	800
扶手带内圆直径 handrail and side balustrade	1158	958
扶手带中心距 C handrail center distance	1238	1038
人行道外形宽度 D moving walkway width	1600	1400
承重量级 L supporting beam length	1660	1460
外圈围梯宽度 F external balustrade width	2310	2110
地坎高度 G pit width	1660	1460
支链臂 R1 [K N] support/opposite force	0.009K ₁ L+22	0.0078K ₁ L+15
支链臂 R2 [K N] support/opposite force	0.009K ₂ L+10	0.0078K ₂ L+9
支链臂 R3 [K N] support/opposite force	0.0117x [L1+L2]	0.0104K ₃ x [L1+L2]
支链臂 R4 [K N] support/opposite force	0.0117x [L2+L3]	0.0104K ₄ x [L2+L3]

0° 自动人行道 土建图

0° Moving-walk construction sketch

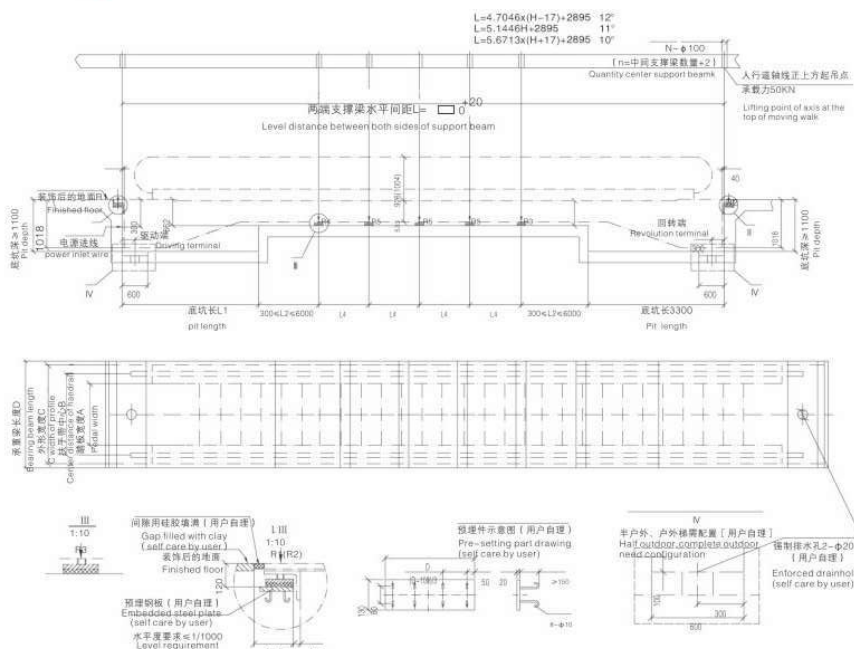

踏板宽度 Pedal width		1000		800	
中间支撑间距 L4 Center distance upper bar		6000	10000	6000	10000
支持踏板的 最大力 (kN)	R1	40	38	35	34
	R2	34.5	34	32	31
	R3	62.5	78.5	52	64.5
	R4	63.5	79.4	54	66.6
	R5	48	79.4	40	66.6
电机功率/额定电流 motor capacity / rated current		输送长度 L conveyor length		输送长度 L conveyor length	
		10000~70000	8kW/18A	10000~80000	8kW/18A
		70001~110000	11kW/25A	80001~110000	11kW/25A

注意事项 Notes

1、当使用环境温度为 0°C （室内）或 -20°C （室外），需增加加热装置，加热功率请参照该规格书技术参数；

2、自动行人出入口应有人防雨的檐篷或雨棚，其高度至少为扶手中心线高度，檐篷至少为扶手中心线高度至少为2.5m，如区域高度为扶手中心线高度约等于其，其扶手至少为扶手中心线高2m3，如有底坎，应防水处理，用户自理；

4、自动行人扶手扶手应高于障碍物 $\geq 50\text{mm}$ ，否则扶手扶手应高于障碍物的三角处应加设防护板，用户自理；

5、当使用自动行人电源，应增加不小于4级铝的地板的装置，在上承面下，自留2级进线余量，电动机功率按表要求；

6、室内自动行人出入口上下出入口的光照度至少为 50Lux ，户、户外自动行人出入口上下出入口的光照度至少为 15Lux （用户自理）；

7、如中间支撑承梁采用钢结构，请咨询该规格书技术参数；

8、自动行人道两侧与地面的坡度由用户自理；

7. When the use environment is less than 0°C (outdoor or half outdoor), need to increase the heater, heater please consult the total power SIG escalator technology. 2. Sufficient unblocked space is needed at entrance and exit of moving walk and the width should be the center distance at east, the depth (from handrail turn end) should be 2.5m at least, this area width should more than two times of the handrail center distance, the depth can be 2.5m. 3. If handrail need waterproof, please waterproof the handrail by user. 4. If the use environment is less than 0°C (outdoor or half outdoor), need to increase the heater, heater please consult the total power SIG escalator technology. 5. Triangle shape of handrail support should install protecting board (self-care by user), user should provide power supply and electric connection equipment with resistance less than 4 ohm, it should leave two meters left margin line under the upper supporting beams, motor capacity according to left form. 6. Luminance at least should be 50Lx at entrance and exit of indoor moving walk, luminance at least should be 15Lx at entrance and exit of outdoor and semi outdoor (self-care by user). 7. If the use environment is less than 0°C (outdoor or half outdoor), need to increase the heater, heater please consult the total power SIG escalator technology. 8. If the use environment is less than 0°C (outdoor or half outdoor), need to increase the heater, heater please consult the total power SIG escalator technology for advice. 9. The sides and bottom decoration of moving walk self-care by user.

技术说明 technical notes	
仰角 α dip angle	0~6°
速度 V speed	0.5m/s
踏板类型 pedal type	铝合金 (室内/户外/户外) aluminum alloy (indoor/all outdoor/complete board)
踏板宽度 A pedal width	1000 800
扶手带中心距B handrail center distance b	1238 1038
外形宽度 C moving walk outside width	1600 1400
承重梁长度 D machine supporting beam length	≥ 1600 ≥ 1400
安装场合/驱动方式 mounting place/drive mode	长度 L1 length
室内型/变频 indoor/frequency	4000
室外型/变频 semi-outdoor/frequency	4600
户外型/变频 outdoor/frequency	4600
用户电源 380V AC 50Hz 三相五线电源，行人道启动时，电压降 $\leq 10\%$ ，正常运行时，电压降 $\leq 5\%$ ，最大启动电流小于额定电流的 1.5 倍。 User needs to supply 380V 50Hz three-phase five-wire power supply Voltage should be 10 when moving walk at the start and the voltage should be ≤ 5 in normal operation Maximum starting current should be less than 3.5 times of rated current	

服务流程

Service Process



售前勘测尺寸

Pre-sale survey size

以客户为本，详细了解咨询客户需求，根据客户情况进行专业分析，现场测绘，提供个性化、针对性的解决方案。

Customer-oriented, understand the needs of consulting customers in detail, conduct professional analysis according to customer conditions, conduct on-site surveying and mapping, and provide personalized and targeted solutions.

会审技术方案

Trial technical plan

以高效率、高标准、高安全的安装水平服务不同的工程项目，并对客户进行专业的安装使用培训，全方位支持客户。



Serving different engineering projects with high efficiency, high standards and high safety installation level, and provide customers with professional installation and use training to support customers in all aspects.



定期维修保养

Regular maintenance

以第一时间响应为原则，24小时在线服务，快捷维保，完备配件及时供应，竭诚为您服务。

Based on the principle of the first time response, 24-hour online service, fast maintenance, timely supply of complete accessories, and dedicated service to you.

荣誉资质 Service Process



发明专利证书 Certificate of Invention Patent



序号 NO.	专利名称 Patent name	专利号 Patent No	专利性质 Patent nature
01	别墅电梯的轿壁连接结构 Car wall connecting structure of villa elevator	ZL 2016 1 0672266.X	发明 Invention
02	别墅电梯的钢结构井架 Steel structure derrick of villa elevator	ZL 2016 2 0886138.0	实用新型 Utility Model
03	背包架低直梁电梯 Backpack frame low straight beam elevator	ZL 2016 2 0886124.9	实用新型 Utility Model
04	电梯用弧形板的折弯装置 Bending device of arc plate for elevator	ZL 2016 2 0885858.5	实用新型 Utility Model
05	圆柱形观光电梯 Cylindrical sightseeing elevator	ZL 2016 2 0885859.X	实用新型 Utility Model
06	带轿底轮的背包架电梯 Backpack frame elevator with car bottom wheel	ZL 2016 2 0885861.7	实用新型 Utility Model
07	直顶式电梯 Straight top elevator	ZL 2018 2 0176640.1	实用新型 Utility Model
08	电梯绳轮组件 Elevator sheave assembly	ZL 2018 2 0176639.9	实用新型 Utility Model
09	电梯导轨的检测尺 Detection ruler of elevator guide rail	ZL 2018 2 0176636.5	实用新型 Utility Model
10	家用电梯曳引机 Home elevator traction machine	ZL 2018 2 0177349.6	实用新型 Utility Model
11	电梯井架结构 Elevator mast structure	ZL 2018 2 0176651.X	实用新型 Utility Model
12	螺旋升降机驱动升降的电梯 Lifting elevator driven by screw hoist	ZL 2018 2 0176652.4	实用新型 Utility Model
13	平开门用开门机 Door opener for swing doors	ZL 2018 2 0176637.X	实用新型 Utility Model
14	电梯轿厢（五行风水属土） Elevator car (Five Elements Fengshui is a soil)	ZL 2018 3 0240147.7	外观设计专利 Appearance Design Patent
15	电梯的井架结构 Mast structure of elevator	ZL 2018 10 1026134	发明 Invention
16	平开门用电动开门机 Electric door opener for swing doors	ZL 2018 10 1020053	发明 Invention
17	螺旋升降机驱动升降的直顶式电梯 Straight top elevator driven by spiral elevator	ZL 2018 10 1020049	发明 Invention
18	电梯曳引机 Elevator traction machine	ZL 2018 10 1020034	发明 Invention
19	电梯导轨用检测尺 Inspection ruler for elevator guide rail	ZL 2018 10 1015163	发明 Invention
20	电梯轿厢轿壁的隔音结构 Sound insulation structure of elevator car wall	ZL 2019 2 2322216.0	实用新型 Utility Model
21	电梯对重的装饰结构 Decorative structure of elevator counterweight	ZL 2019 2 2322210.3	实用新型 Utility Model
22	电梯轿厢轿门的隔音结构 Sound insulation structure of elevator car door	ZL 2019 2 2322559.7	实用新型 Utility Model
23	电梯轿厢箱顶的通风结构 Ventilation structure of elevator car top	ZL 2019 2 2355115.3	实用新型 Utility Model
24	无底坑别墅电梯 Bottomless pit villa elevator	ZL 2019 2 2355112.X	实用新型 Utility Model