
CNDF

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

- AXIAL FAN
- CENTRIFUGAL FAN
- SWITCHING POWER SUPPLY
- LED DRIVER

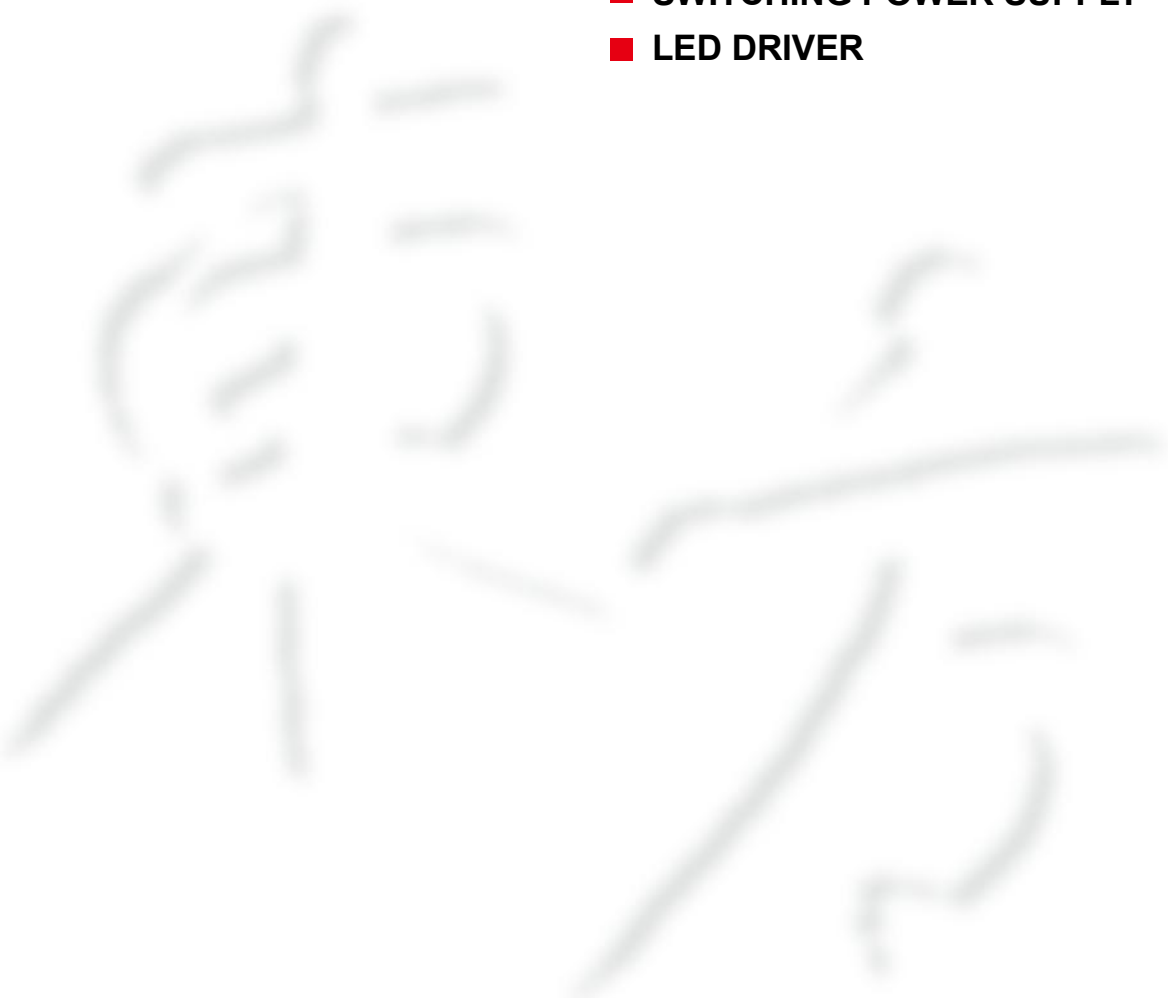

CNDF

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

COMPANY PROFILE



Zhejiang Dongfang Electromechanical Co., Ltd has developed into a large-scale modern enterprise engaged in the industry of Axial Fan and Switching Power Supply. The company owns workshop building 30,000m^2, more than 1000 employee, and the fixed assets reach to 10 million yuan. We have passed ISO9001 quality system certification in 1998, and most of our products have got the certification of UL, TUV, CE, RoHS.

Our products involve in many industries, such as Electricity, Computer, Communication, Auautomobile, Generator, Handling of foul water, Fiire control, Safe control, Teaching instrument and so on. We are tomate control, Electric also the industrialization base of many Institute and "R&D" institution. On the aspect of function and innovation, our products have a lead over position in the same industry after cooperating with these Institutes and "R&D" institutions.

The company has long prusued the management idea of "Explore the market with quality, establish brand with good faith". In the new period, Zhejiang Dongfang Electromechanical Co., Ltd, will strive forward to become a preeminent brand that has global competition ability with superior advantages, perfect quality, strategic thought and broad view.

CNDF

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

ENTERPRISE HONOR
























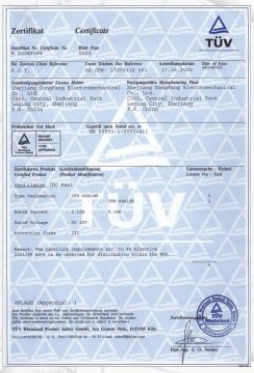

CNDF

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

ENTERPISE RESOURCE













Kernel resource is a safeguard to spanning forward, an embodiment of internal strength. dongfang electromechanical will manufacture hardware equipment that is parts of kernel resource, lntroduce intoadvance and topping equipments of producing and measuring fromhome and foreign to accelerate developing strength of scientific research. guarantee to improve content of science and technology, thereby strenghten market competitiveness of production……

















CNDF


ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

DC BRUSHLESS FAN SERIES.....2-7

DC BLOWER FAN SERIES 8

AC AXIAL FAN SERIES.....9-18


CENTRIFUGAL FAN SERIES.....19-21

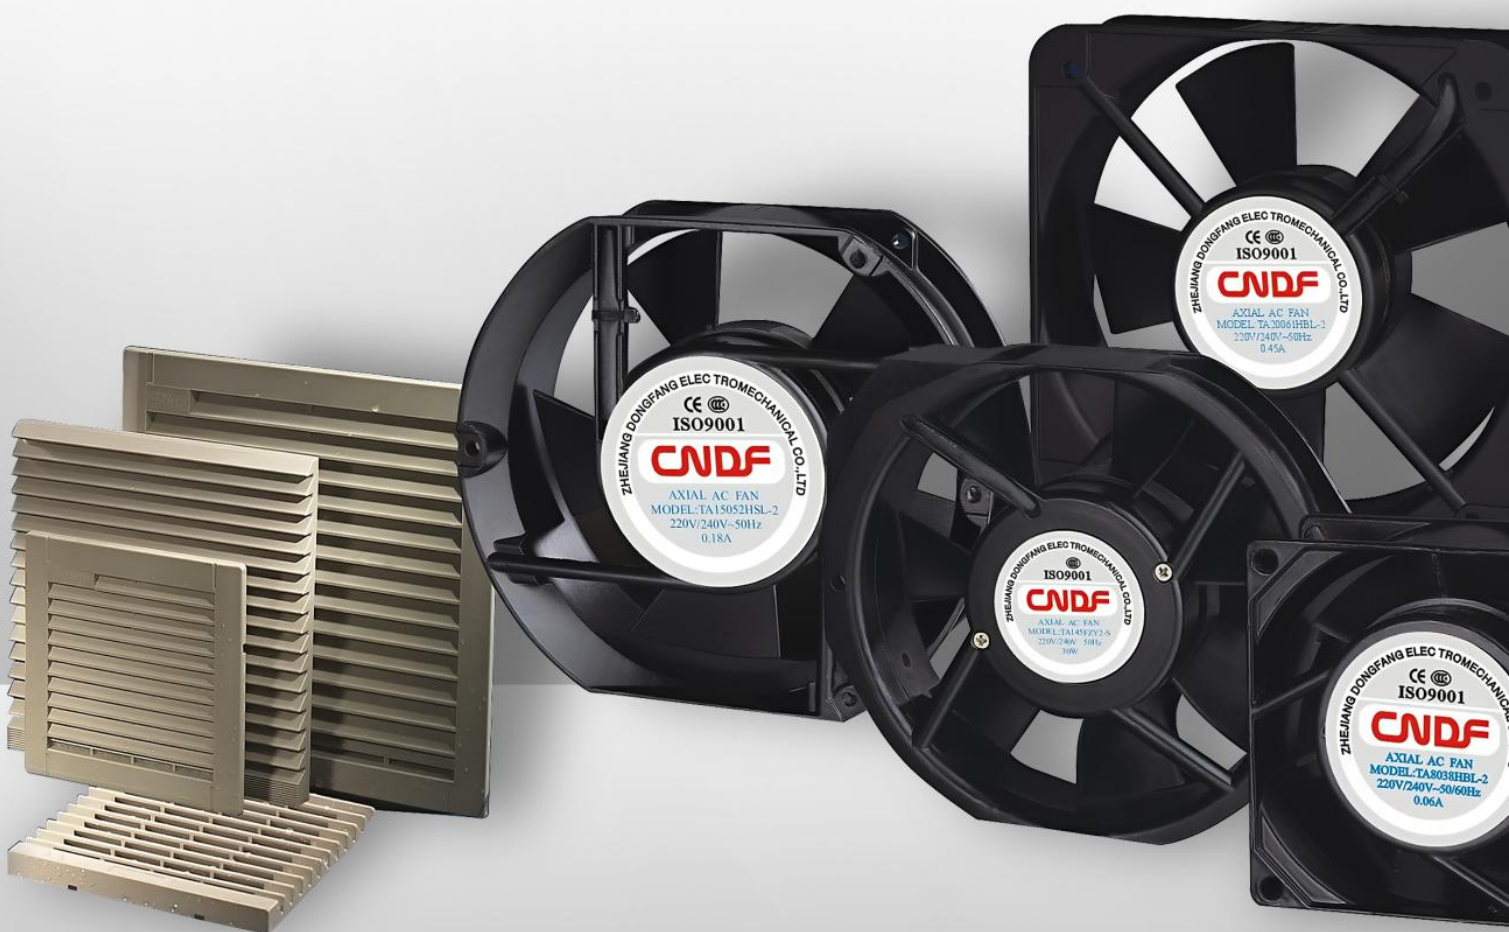

General Data of DC Brushless Fan

Frame Type: Black PBT (UL94V–0)
Impeller: Black PBT(UL94V–0)
Bearing: 2 Ball bearing, Sleeve bearing,
Insulation Resistance: 10M at 500VDC
Dielectric withstand: Between lead or terminal and housing 700VAC for 3 sec or 500VDC for 1min
Life Expectancy: Ambient temperature 25℃ and humidity 65% Sleeve bearing: 30000 Hours, 2 ball bearing:50000 Hours
Operation Temperature: –10℃ to 70℃(Ordinary humidity)
Storage Temperature: –40℃ to 80℃(Ordinary humidity)
Lead wire: UL 1007AWG#24/26,+:Red,–:Black,Y:Yellow
Safety: UL, TUV, CE, , RoHS
Ingress of protection: IP44

Name System of DC Brushless Fan

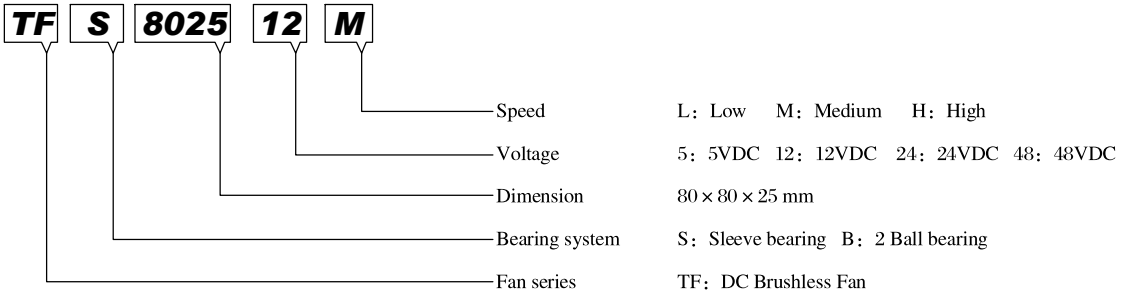

TF2510 Series



25×25×10

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF2510H	S	B	5	0.25	1.25	12000	2.11	6.76	29.25	7
TF2510M	S	B	5	0.16	0.80	10000	1.60	5.97	23.20	7
TF2510L	S	B	5	0.14	0.70	7000	1.22	4.18	21.50	7
TF2510H	S	B	12	0.12	1.44	12000	2.11	6.76	29.50	7
TF2510M	S	B	12	0.09	1.08	10000	1.60	5.97	23.20	7
TF2510L	S	B	12	0.05	0.60	7000	1.22	4.18	21.50	7

TF3010 Series


30×30×10

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF3010H	S	B	5	0.23	1.15	10000	4.90	4.70	32.40	8
TF3010M	S	B	5	0.17	0.85	8000	3.19	2.96	23.20	8
TF3010L	S	B	5	0.10	0.50	6000	2.49	1.97	12.00	8
TF3010H	S	B	12	0.12	1.44	10000	4.90	4.70	32.40	8
TF3010M	S	B	12	0.07	0.84	8000	3.19	2.96	23.20	8
TF3010L	S	B	12	0.05	0.60	6000	2.49	1.97	12.00	8

TF4010 Series



40×40×10

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF4010H	S	B	5	0.2	1.00	6000	5.75	3.49	29.5	15
TF4010M	S	B	5	0.14	0.70	5000	4.84	2.54	28.2	15
TF4010L	S	B	5	0.09	0.45	4000	3.78	1.53	25.63	15
TF4010HH	S	B	12	0.13	1.56	7000	6.56	4.53	33.76	15
TF4010H	S	B	12	0.12	1.44	6000	5.75	3.49	29.5	15
TF4010M	S	B	12	0.07	0.84	5000	4.84	2.54	28.2	15
TF4010L	S	B	12	0.06	0.72	4000	3.78	1.53	25.63	15
TF4010H	S	B	24	0.06	1.44	6000	5.75	3.49	29.5	15
TF4010M	S	B	24	0.05	1.20	5000	4.84	2.54	28.2	15
TF4010L	S	B	24	0.04	0.96	4000	3.78	1.53	25.63	15

TF4020 Series



40×40×20

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF4020H	S	B	5	0.25	1.25	6000	6.69	5.88	32.4	23
TF4020M	S	B	5	0.20	1.00	5000	5.59	4.56	28.2	23
TF4020L	S	B	5	0.15	0.75	4000	4.23	3.25	25.6	23
TF4020H	S	B	12	0.25	3.00	7000	7.8	5.88	32.4	23
TF4020M	S	B	12	0.20	2.40	6000	6.69	4.56	28.2	23
TF4020L	S	B	12	0.15	1.80	5000	5.59	3.25	25.6	23
TF4020H	S	B	12	0.15	3.60	7000	7.8	5.88	32.4	23
TF4020M	S	B	24	0.12	2.88	6000	6.69	4.56	28.2	23
TF4020L	S	B	24	0.08	1.12	5000	5.59	3.25	25.6	23

TF5010 Series



50×50×10

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF5010H	S	B	5	0.2	1.00	6000	14.23	6.16	38.1	25
TF5010M	S	B	5	0.16	0.80	5000	11.89	4.27	34.5	25
TF5010L	S	B	5	0.14	0.70	4000	9.30	2.74	30.2	25
TF5010H	S	B	12	0.14	1.68	6000	14.23	6.16	38.1	25
TF5010M	S	B	12	0.12	1.44	5000	11.89	4.27	34.5	25
TF5010L	S	B	12	0.09	1.08	4000	9.30	2.74	30.2	25
TF5010H	S	B	24	0.09	2.16	6000	14.23	6.16	38.1	25
TF5010M	S	B	24	0.08	1.92	5000	11.89	4.27	34.5	25
TF5010L	S	B	24	0.06	1.44	4000	9.30	2.74	30.2	25

TF5015 Series



50×50×15

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF5015H	S	B	12	0.21	2.52	6000	16.56	5.18	37.40	27
TF5015M	S	B	12	0.16	1.92	5000	14.35	4.17	32.90	27
TF5015L	S	B	12	0.11	1.32	4000	11.36	2.68	28.80	27
TF5015H	S	B	24	0.14	3.36	6000	16.56	5.18	37.40	27
TF5015M	S	B	24	0.10	2.40	5000	14.35	4.17	32.90	27
TF5015L	S	B	24	0.07	1.68	4000	11.36	2.68	28.80	27

TF6010 Series



60×60×10

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF6010H	S	B	5	0.24	1.20	3500	15.5	2.39	27.20	25
TF6010M	S	B	5	0.18	0.90	3100	13.71	1.91	24.10	25
TF6010L	S	B	5	0.13	0.65	2600	11.4	1.37	21.00	25
TF6010H	S	B	12	0.16	1.92	4200	18.67	3.48	31.90	25
TF6010M	S	B	12	0.13	1.56	3500	15.5	2.39	27.20	25
TF6010L	S	B	12	0.11	1.32	3000	13.71	1.91	24.10	25

TF6015 Series



60×60×15

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF6015H	S	B	12	0.21	2.52	4500	21.03	4.12	36.00	33
TF6015M	S	B	12	0.16	1.92	4000	19.17	3.65	33.10	33
TF6015L	S	B	12	0.10	1.20	3000	14.77	2.38	27.30	33
TF6015H	S	B	24	0.12	2.88	4500	21.03	4.12	36.00	33
TF6015M	S	B	24	0.10	2.40	4000	19.17	3.65	33.10	33
TF6015L	S	B	24	0.05	1.20	3000	14.77	2.38	27.30	33

TF6020 Series



60×60×20

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF6020H	S	B	12	0.20	2.40	4500	15.56	3.52	29.5	50
TF6020M	S	B	12	0.16	1.92	4000	13.84	2.75	26.4	50
TF6020L	S	B	12	0.13	1.56	3500	12.06	1.53	13.6	50
TF6020H	S	B	24	0.14	3.36	4500	15.56	3.52	29.5	50
TF6020M	S	B	24	0.11	2.64	4000	13.84	2.75	26.4	50
TF6020L	S	B	24	0.08	1.92	3500	12.06	1.53	13.6	50

TF6025 Series



60×60×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF6025H	S	B	12	0.23	2.76	5000	23.39	5.44	35.72	65
TF6025M	S	B	12	0.20	2.40	4500	21.50	4.99	32.64	65
TF6025L	S	B	12	0.14	1.68	3500	16.90	3.26	27.22	65
TF6025H	S	B	24	0.17	4.08	5000	23.39	5.44	35.72	65
TF6025M	S	B	24	0.12	2.88	4500	21.50	4.99	32.64	65
TF6025L	S	B	24	0.08	1.92	3500	16.90	3.26	27.22	65
TF6025HH	S	B	48	0.11	5.28	5500	26.34	7.13	39.29	65

TF7015 Series



70×70×15

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF7015H	S	B	12	0.22	2.64	3500	29.50	3.50	35.7	45
TF7015M	S	B	12	0.16	1.92	3000	24.99	2.70	31.5	45
TF7015L	S	B	12	0.10	1.20	2500	20.87	1.95	28.5	45
TF7015H	S	B	24	0.15	3.60	3500	29.50	3.50	35.7	45
TF7015M	S	B	24	0.10	2.40	3000	24.99	2.70	31.5	45
TF7015L	S	B	24	0.07	1.68	2500	20.87	1.95	28.5	45

TF7020 Series



70×70×20

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF7020H	S	B	12	0.28	3.36	4500	38.62	6.76	36.50	51
TF7020M	S	B	12	0.22	2.64	4000	33.36	5.83	31.23	51
TF7020L	S	B	12	0.16	1.92	3500	27.20	3.69	26.78	51
TF7020H	S	B	24	0.18	4.32	4500	38.62	6.76	36.50	51
TF7020M	S	B	24	0.12	2.88	4000	33.36	5.83	31.23	51
TF7020L	S	B	24	0.09	2.16	3500	27.20	3.69	26.78	51

TF7025 Series



70×70×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF7025H	S	B	12	0.25	3.00	3700	36.97	4.24	35.70	70
TF7025M	S	B	12	0.17	2.04	3200	31.48	3.09	32.70	70
TF7025L	S	B	12	0.12	1.44	2700	27.2	2.20	28.80	70
TF7025H	S	B	24	0.12	2.88	3700	36.97	4.24	35.70	70
TF7025M	S	B	24	0.10	2.40	3200	31.48	3.09	32.70	70
TF7025L	S	B	24	0.06	1.44	2700	27.2	2.20	28.80	70

TF8015 Series



80×80×15

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF8015H	S	B	12	0.22	2.64	3500	33.95	3.76	35.7	50
TF8015M	S	B	12	0.16	1.92	3000	31.60	2.48	31.5	50
TF8015L	S	B	12	0.10	1.20	2500	26.03	2.21	28.5	50
TF8015H	S	B	24	0.15	3.60	3500	33.95	3.76	35.7	50
TF8015M	S	B	24	0.10	2.40	3000	31.60	2.48	31.5	50
TF8015L	S	B	24	0.07	1.68	2500	26.03	2.21	28.5	50

DC BRUSHLESS FAN

TF8020 Series



80×80×20

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF8020H	S	B	12	0.21	2.52	3500	34.50	4.80	40.20	70
TF8020M	S	B	12	0.17	2.04	3000	28.80	3.50	32.40	70
TF8020L	S	B	12	0.12	1.44	2500	23.30	2.36	27.00	70
TF8020H	S	B	24	0.14	3.36	3500	34.50	4.80	40.20	70
TF8020M	S	B	24	0.10	2.40	3000	28.80	3.50	32.40	70
TF8020L	S	B	24	0.08	1.92	2500	23.30	2.36	27.00	70

TF8025 Series



80×80×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF8025HH	S	B	12	0.28	3.36	3500	35.19	3.48	38.00	85
TF8025H	S	B	12	0.22	2.64	3000	30.73	2.67	33.50	85
TF8025M	S	B	12	0.17	2.04	2500	25.80	1.98	29.00	85
TF8025L	S	B	12	0.14	1.68	2000	20.85	1.32	23.20	85
TF8025HH	S	B	24	0.18	4.32	3500	35.19	3.48	38.00	85
TF8025H	S	B	24	0.15	3.60	3000	30.73	2.67	33.50	85
TF8025M	S	B	24	0.12	2.88	2500	25.80	1.98	29.00	85
TF8025L	S	B	24	0.09	2.16	2000	20.85	1.32	23.20	85

TF9225 Series



92×92×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF9225H	S	B	12	0.28	3.36	2800	64.16	4.84	34.30	90
TF9225M	S	B	12	0.20	2.40	2400	54.44	3.60	32.60	90
TF9225L	S	B	12	0.13	1.56	1900	47.34	2.58	28.00	90
TF9225H	S	B	24	0.19	4.56	2800	64.16	4.84	34.30	90
TF9225M	S	B	24	0.14	3.36	2400	54.44	3.60	32.60	90
TF9225L	S	B	24	0.09	2.16	1900	47.34	2.58	28.00	90

TF12025 Series



120×120×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF12025HH	S	B	12	0.35	4.20	2200	80.49	3.58	38.5	126
TF12025H	S	B	12	0.19	2.28	1800	65.63	2.51	32.5	126
TF12025M	S	B	12	0.13	1.56	1500	54.05	1.8	27.4	126
TF12025L	S	B	12	0.07	0.84	1200	43.23	1.19	21.4	126
TF12025H	S	B	24	0.18	4.32	2200	80.49	1.19	38.5	126
TF12025M	S	B	24	0.12	2.88	1800	65.63	2.54	32.5	126
TF12025L	S	B	24	0.08	1.92	1500	54.05	1.53	27.4	126

TF12038 Series



120×120×38

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF12038HH	S	B	12	0.93	11.16	3500	135.80	9.04	47.90	265
TF12038H	S	B	12	0.80	9.60	3000	118.70	7.14	43.80	265
TF12038M	S	B	12	0.48	5.76	2500	101.30	5.41	39.10	265
TF12038L	S	B	12	0.32	3.96	2000	84.50	3.94	33.80	265
TF12038HH	S	B	24	0.42	10.08	3500	135.80	9.04	47.90	265
TF12038H	S	B	24	0.40	9.60	3000	118.70	7.14	43.80	265
TF12038M	S	B	24	0.31	7.44	2500	101.30	5.41	39.10	265
TF12038L	S	B	24	0.22	5.28	2000	84.50	3.94	33.80	265
TF12038HH	S	B	48	0.32	15.36	4000	151.17	11.66	50.60	265
TF12038H	S	B	48	0.25	12.00	3500	135.80	9.04	47.90	265
TF12038M	S	B	48	0.20	9.60	3000	118.70	7.14	43.80	265
TF12038L	S	B	48	0.13	6.24	2500	101.30	5.41	39.10	265


TF14025 Series



140×140×25

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF14025H	S	B	12	0.36	6.60	1800	113.56	2.64	37.1	220
TF14025M	S	B	12	0.21	4.32	1500	93.16	2.03	32.1	220
TF14025L	S	B	12	0.13	2.52	1200	93.16	1.19	26.5	220
TF14025H	S	B	24	0.23	5.52	1800	113.56	2.64	37.1	220
TF14025M	S	B	24	0.14	3.36	1500	93.16	2.03	32.1	220
TF14025L	S	B	24	0.10	2.40	1200	93.16	1.19	26.5	220

TF15025 Series



172×150×25

Model	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF15025H	B	12	1.20	14.40	3200	215.00	13.50	54.00	380
TF15025M	B	12	0.80	9.60	2700	180.00	9.80	50.00	380
TF15025H	B	24	0.65	15.60	3200	215.00	13.50	54.00	380
TF15025M	B	24	0.40	9.60	2700	180.00	9.80	50.00	380
TF15025H	B	48	0.40	19.20	3200	215.00	13.50	54.00	380
TF15025M	B	48	0.25	12.00	2700	180.00	9.80	50.00	380

TF15052 Series



172×150×52

Model	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF15052H	B	12	2.18	26.16	3200	270.00	18.10	62.00	700
TF15052M	B	12	1.75	21.00	2800	242.00	13.80	56.00	700
TF15052H	B	24	1.18	28.32	3200	270.00	18.10	62.00	700
TF15052M	B	24	0.75	18.00	2800	242.00	13.80	56.00	700
TF15052H	B	48	0.72	34.56	3200	270.00	18.10	62.00	700
TF15052M	B	48	0.36	17.28	2800	242.00	13.80	56.00	700

TF5015 Series



50×50×15

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF5015H	S	B	5	0.30	1.50	5500	3.88	18.00	38.00	25
TF5015M	S	B	5	0.33	1.65	4500	3.18	11.00	32.50	25
TF5015L	S	B	5	0.15	0.75	3500	2.47	7.00	26.50	25
TF5015M	S	B	12	0.17	2.04	5500	3.88	18.00	38.00	25
TF5015H	S	B	12	0.12	1.44	4500	3.18	11.00	32.50	25
TF5015L	S	B	12	0.08	0.96	3500	2.47	7.00	26.50	25

TF7530 Series



75×75×30

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF7530H	S	B	12	0.45	5.40	3500	13.50	10.55	40.20	90
TF7530M	S	B	12	0.25	3.00	3000	10.30	6.30	36.50	90
TF7530L	S	B	12	0.20	2.40	2500	7.80	3.20	32.00	90
TF7530H	S	B	24	0.28	6.72	3500	13.50	10.55	40.20	90
TF7530M	S	B	24	0.18	4.32	3000	10.30	6.30	36.50	90
TF7530L	S	B	24	0.14	3.36	2500	7.80	3.20	32.00	90

TF9733 Series



97×94×33

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF9733H	S	B	12	0.85	10.20	4000	28.30	30.00	55.50	130
TF9733M	S	B	12	0.60	7.20	3200	22.10	18.50	49.00	130
TF9733L	S	B	12	0.38	4.56	2800	19.30	13.45	45.00	130
TF9733H	S	B	24	0.43	10.32	4000	28.30	30.00	55.50	130
TF9733M	S	B	24	0.28	6.72	3200	22.10	18.50	49.00	130
TF9733L	S	B	24	0.20	4.80	2800	19.30	13.45	45.00	130

TF12032 Series



120×120×32

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF12032H	S	B	12	1.20	14.40	3200	36.12	32.35	56.00	280
TF12032M	S	B	12	0.65	7.80	2500	30.00	33.00	50.00	280
TF12032L	S	B	12	0.45	5.40	2100	24.66	14.00	46.00	280
TF12032H	S	B	24	0.65	15.60	3200	36.12	32.35	56.50	280
TF12032M	S	B	24	0.45	10.80	2500	30.00	22.00	50.00	280
TF12032L	S	B	24	0.25	6.00	2100	24.66	14.00	46.00	280

TF14540 Series



145×136×40

Model	Bearing Type		Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Noise (dBA)	Weight (g)
TF14540H	S	B	12	2.00	24.00	2800	52.70	37.20	61.80	380
TF14540M	S	B	12	1.60	19.20	2500	46.20	31.70	55.40	380
TF14540L	S	B	12	1.00	12.00	2200	40.50	22.20	47.60	380
TF14540H	S	B	24	1.20	28.80	2800	52.70	37.20	61.80	380
TF14540M	S	B	24	0.90	21.60	2500	46.20	31.70	55.40	380
TF14540L	S	B	24	0.60	14.40	2200	40.50	22.20	47.60	380

General Data of AC Axial Fan

Frame Type: High quality Die-cast Aluminum alloy painted

Impeller: Black PBT (UL94V-0)

Bearing: 2 Ball bearing; Sleeve Bearing

Insulation Resistance: Min.100M Ohm at 500 VDC between terminal (wire) (+) and frame

Dielectric Withstand: 1500 VAC for 1 sec between terminal (wire) (+) and frame

Life Expectancy: At Ambient temperature 25℃ and humidity 65%, Sleeve bearing: 30000 Hours; 2 Ball bearing: 50000 Hours


Operation Temperature: -20℃~85℃ (Ordinary humidity)

Storage Temperature: -30℃~140℃ (Ordinary humidity)

Lead wire: UL 1007/1015 AWG#18/22

Safety: CE approved, RoHS

Name System of AC Axial Fan

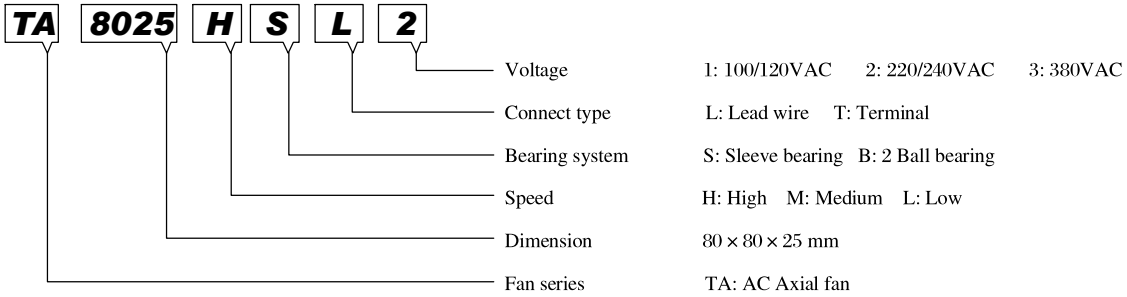



80×80×25

TA8025 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch-H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA8025HSL-1	*	*	110/120	50/60	0.14/0.13	15/11	2300/2800	17/21	0.072/0.12	22/26.6	250
TA8025HSL-2	*	*	220/240	50/60	0.08/0.07	16/11	2300/2800	17/21	0.072/0.12	22/26.6	250



80×80×38

TA8038 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch-H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA8038HBL-1	*	*	110/120	50/60	0.14/0.13	10/6.8	2200/2700	24/29.8	0.12/0.17	25.5/31.2	320
TA8038MBL-2	*	*	220/240	50/60	0.08/0.06	10/6.8	2200/2700	24/29.8	0.12/0.17	25.5/31.2	320
TA8038MBL	*	*	110/230	50/60	0.32/0.16	28	2200	24	0.12	25.5	320



92×92×25

TA9225 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA9225HL-1	*	*	110/120	50/60	0.14/0.13	15/12	2300/2700	25/27	0.12/0.14	23/24	270
TA9225HL-2	*	*	220/240	50/60	0.08/0.07	16/11	2300/2700	25/27	0.12/0.14	23/24	270



92×92×38

TA9238 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA9238ML-1	*	*	110/120	50/60	0.12/0.15	7/15	2100/2600	45/55	0.16/0.21	37/41	310
TA9238ML-2	*	*	220/240	50/60	0.06/0.08	11/17	2100/2500	45/55	0.16/0.21	37/41	310



110×110×25

TA11025 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA11025ML-1	*	*	110/120	50/60	0.16/0.15	17/16	2100/2400	47/52	0.13/0.14	31/34	310
TA11025ML-2	*	*	220/240	50/60	0.10/0.09	18/17	2100/2400	47/52	0.13/0.14	31/34	310



120×120×25

TA12025 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA12025ML-1	*	*	110/120	50/60	0.23/0.15	17/16	2100/2400	61/70	0.13/0.15	38/44	320
TA12025ML-2	*	*	220/240	50/60	0.10/0.09	18/17	2100/2400	61/70	0.13/0.15	38/44	320



120×120×38

TA12038 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA12038HL-1	*	*	110/120	50/60	0.25/0.23	25/20	2500/2900	87/108	0.23/0.28	46.5/52.6	515
TA12038HL-2	*	*	220/240	50/60	0.14/0.12	25/20	2500/2900	87/108	0.23/0.28	46.5/52.6	515

TA13538 Series



135×135×38

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA13538ML-1	*	*	110/120	50/60	0.28	25	2350	92	0.29	44.3	570
TA13538ML-2	*	*	220/240	50/60	0.16	25	2350	92	0.29	44.3	570

TA15051 Series



150×150×51

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA15051HL-1	*	*	110/120	50/60	0.33	25	2500	180	0.38	49.6	960
TA15051HL-2	*	*	220/240	50/60	0.20	25	2500	180	0.38	49.6	960

TA15052 Series



170×150×52

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA15052HL-1	*	*	110/120	50/60	0.33/0.30	25/23	2500/2700	180/195	0.38/0.52	49.6/53	870
TA15052HL-2	*	*	220/240	50/60	0.18/0.25	25/40	2500/2800	180/201	0.38/0.54	49.6/55	870

TA17251 Series



Φ172×51

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA17251MBL-1	*	*	110/120	50/60	0.33	25	2500	190	0.48	53.3	960
TA17251MBL-2	*	*	220/240	50/60	0.18/0.22	25/35	2500/2700	190/205	0.48/0.52	53.3/56.2	908

TA18060 Series



180×180×60

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA18060HBL-1	*	*	110/120	50/60	0.60	50	2500	255	0.60	58	1600
TA18060HBL-2	*	*	220/240	50/60	0.35	55	2500	255	0.60	58	1600



200×200×60

TA20060 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA20060MBL-1	*	*	110/120	50	0.80	65	2300	254	0.58	56	1690
TA20060MBL-2	*	*	220/240	50	0.45	70	2500	285	0.65	60	1690



Φ220×60

TA22060 Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA22060MBL-1	*	*	110/120	50	0.80	65	2300	254	0.58	56	1610
TA22060MBL-2	*	*	220/240	50	0.45	70	2500	285	0.65	60	1610

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.
METAL IMPELLER AC AXIAL FAN

Metal Impeller AC Axial Fan

Frame Type: High quality Die–cast Aluminum alloy painted

Impeller: Iron Leaf

Operation Temperature: –20℃~105℃ (Ordinary humidity)



80×80×38

TA8038A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA8038AHL-1	*	*	110/120	50/60	0.12	11	2300/2700	25/29	0.12/0.14	30/35	420
TA8038AHL-2	*	*	220/240	50/60	0.07	13	2300/2700	25/29	0.12/0.14	30/35	420



92×92×38

TA9238A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch–H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA9238AHL-1	*	*	110/120	50/60	0.22	14	2300/2700	42/50	0.15/0.17	34/40	480
TA9238AHL-2	*	*	220/240	50/60	0.1	14	2300/2700	42/50	0.12/0.14	34/40	480

METAL IMPELLER AC AXIAL FAN



120×120×38

TA12038A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch-H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA12038AHL-1	*	*	110/120	50/60	0.25	24	2600/3000	106/120	0.23/0.28	46/50	600
TA12038AHL-2	*	*	220/240	50/60	0.14	22	2600/3000	106/120	0.23/0.28	46/50	600



170×150×55

TA15055A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (Inch-H_2O)	Noise (dBA)	Weight (g)
	S	B									
TA15055AHL-1		*	110/120	50/60	0.6	46	2700/3100	200/240	1.18/1.6	50/54	1200
TA15055AHL-2		*	220/240	50/60	0.3	46	2700/3100	200/240	1.18/1.6	50/54	1200



225×225×80

TA22580A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Phase	Capacitor (μ F/V)	Noise (dBA)	Weight (g)
	S	B											
TA22580AHL-1		*	110/120	50/60	0.7	80	2500/2850	588/676	0.9	1	4.0/250	65/68	2100
TA22580AHL-2		*	220/240	50/60	0.4	80	2500/2850	588/676	0.9	1	2.2/400	65/68	2100
TA22580AHL-3		*	380	50/60	0.28	80	2500/2850	588/676	0.9	3	/	65/68	2100
TA22580AHL-4		*	380	50/60	0.32	80	2500/2850	588/676	0.9	1	2.2/630	65/68	2100



280×280×80

TA28080A Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Pressure (mm-H_2O)	Phase	Capacitor (μ F/V)	Noise (dBA)	Weight (g)
	S	B											
TA28080AHL-1		*	110/120	50/60	1.2	120	2400/2650	1341/1512	0.9	1	4.0/250	65/70	2800
TA28080AHL-2		*	220/240	50/60	0.55	120	2400/2650	1341/1512	0.9	1	2.0/500	65/70	2800
TA28080AHL-3		*	380	50/60	0.32	120	2400/2650	1341/1512	0.9	3	/	65/70	2800
TA28080AHL-4		*	380	50/60	0.36	120	2400/2650	1341/1512	0.9	1	2.0/630	65/70	2800

AXIAL FAN FZY-D-SERIES



172×152×39

145FZY-S Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
145FZY1-S		*	110/120	50/60	0.34/0.36	27/30	2400/2600	159/172	1	3.3/250	52/57	740
145FZY2-S		*	220/240	50/60	0.13/0.15	27/30	2400/2600	159/172	1	1.0/400	52/57	740
145FZY3-S		*	380	50/60	0.08/0.1	27/30	2400/2600	159/172	3	/	52/57	740
145FZY4-S		*	380	50/60	0.1/0.12	27/30	2400/2600	159/172	1	0.47/630	52/57	740



150×160×60

150FZY-D Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
150FZY1-D		*	110/120	60	0.25	25	2800	216	1	3/250	65	850
150FZY2-D		*	220/240	50	0.16	30	2800	216	1	1.0/400	65	850
150FZY3-D		*	380	50	0.12	40	2800	216	3	/	65	850
150FZY4-D		*	380	50	0.1	35	2800	216	1	0.33/630	65	850



200×210×71

200FZY-D Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
200FZY1-D		*	110/120	60	0.6	65	2600	459	1	3/250	68	1500
200FZY2-D		*	220/240	50	0.3	65	2600	459	1	1/400	68	1500
200FZY3-D		*	380	50	0.18	65	2600	459	3	/	68	1500
200FZY4-D		*	380	50	0.16	65	2600	459	1	0.47/630	68	1500



Φ280×90

250FZY-D Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
250FZY1-D		*	110/120	1	50	0.4	40	1300	565	4/250	60	2.9
250FZY2-D		*	220/240	1	50	0.2	40	1300	565	1/400	60	2.9
250FZY3-D		*	380	3	50	0.1	40	1300	565		60	2.9
250FZY4-D		*	380	1	50	0.12	40	1300	565	0.22/630	60	2.9
250FZY5-D		*	110/120	1	50	1	100	2500	870	16/250	72	3.8
250FZY6-D		*	220/240	1	50	0.5	100	2500	870	4/400	72	3.8
250FZY7-D		*	380	3	50	0.2	100	2500	870	/	72	3.8
250FZY8-D		*	380	1	50	0.35	100	2500	870	1.8/630	72	3.8

300FZY-D Series



Φ340×100

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
300FZY1-D		*	110/120	50	0.8	80	1300	1059	1	16/250	65	3.8
300FZY2-D		*	220/240	50	0.4	80	1300	1059	1	4/400	65	3.8
300FZY3-D		*	380	50	0.2	80	1300	1059	3	/	65	3.8
300FZY4-D		*	380	50	0.22	80	1300	1059	1	1/630	65	3.8
300FZY5-D		*	110/120	50	1.9	200	2100	1200	1	12/250	76	4
300FZY6-D		*	220/240	50	0.95	200	2100	1200	1	4/500	76	4
300FZY7-D		*	380	50	0.35	200	2100	1200	3	/	76	4
300FZY8-D		*	380	50	0.55	200	2100	1200	1	1.4/630	76	4

350FZY-D Series



Φ390×108

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
350FZY2-D		*	220/240	50	0.42	90	1050	1353	1	4/400	60	5.1
350FZY3-D		*	380	50	0.3	90	1050	1353	3	/	60	5.1
350FZY4-D		*	380	50	0.35	90	1050	1353	1	2/630	60	5.1
350FZY6-D		*	220/240	50	0.7	150	1500	1836	1	4/500	65	5.5
350FZY7-D		*	380	50	0.35	150	1500	1836	3	/	65	5.5
350FZY8-D		*	380	50	0.4	150	1500	1836	1	2.2/630	65	5.5

400FZY-D Series



Φ430×108

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
400FZY10-D		*	220/240	50	0.5	110	1050	2130	1	4/400	61	6
400FZY11-D		*	380	50	0.35	110	1050	2130	3	/	61	6
400FZY12-D		*	380	50	0.4	110	1050	2130	1	2/630	61	6
400FZY2-D		*	220/240	50	0.8	180	1560	2589	1	6/500	70	6.8
400FZY3-D		*	380	50	0.4	180	1560	2589	3	/	70	6.8
400FZY4-D		*	380	50	0.45	180	1560	2589	1	3/630	70	6.8

AXIAL FAN FZL-W-SERIES



Φ200

200FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
200FZL2-W		*	220/240	50	0.2	40	1400	423	1	1.5/450	55	2.3
200FZL4-W		*	380/420	50	0.18	40	1400	423	3	/	55	2.3
200FZL1-W		*	220/240	50	0.42	80	2750	636	1	1.5/450	66	2.3
200FZL3-W		*	380/420	50	0.27	80	2750	636	3	/	66	2.3



Φ250

250FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
250FZL2-W		*	220/240	50	0.24	55	1400	847	1	2/450	54	3
250FZL4-W		*	380/420	50	0.18	55	1400	847	3	/	54	3
250FZL1-W		*	220/240	50	0.75	120	240	1059	1	4/450	70	3
250FZL3-W		*	380/420	50	0.32	120	2400	1059	3	/	70	3



Φ300

300FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
300FZL5-W		*	220/240	50	0.27	55	920	740	1	2/450	55	3.3
300FZL6-W		*	380/420	50	0.18	55	920	740	3	/	55	3.3
300FZL2-W		*	220/240	50	0.43	90	1350	1059	1	3/450	59	3.3
300FZL4-W		*	380/420	50	0.29	90	1350	1059	3	/	59	3.3
300FZL1-W		*	220/240	50	0.75	160	2100	1623	1	5/450	70	3.3
300FZL3-W		*	380/420	50	0.5	160	2100	1623	3	/	70	3.3



Φ350

350FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
350FZL2-W		*	220/240	50	0.42	90	920	1236	1	4/450	57	5
350FZL4-W		*	380/420	50	0.29	90	920	1236	3	/	57	5
350FZL1-W		*	220/240	50	0.7	150	1400	1836	1	4/450	64	5
350FZL3-W		*	380/420	50	0.37	150	1400	1836	3	/	64	5

AXIAL FAN FZL-W-SERIES



Φ400

400FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
400FZL2-W		*	220/240	50	0.55	120	945	1941	1	5/450	60	6
400FZL4-W		*	380/420	50	0.38	120	945	1941	3	/	60	6
400FZL1-W		*	220/240	50	0.88	195	1400	2647	1	6/450	69	6
400FZL3-W		*	380/420	50	0.48	195	1400	2647	3	/	69	6



Φ450

450FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
450FZL2-W		*	220/240	50	0.8	160	920	2683	1	6/450	62	8
450FZL4-W		*	380/420	50	0.48	160	920	2683	3	/	62	8
450FZL1-W		*	220/240	50	1.08	250	1350	3283	1	8/450	68	8
450FZL3-W		*	380/420	50	0.65	250	1350	3283	3	/	68	8



Φ500

500FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
500FZL2-W		*	220/240	50	1.2	240	920	3707	1	10/450	70	9.5
500FZL4-W		*	380/420	50	0.63	240	920	3707	3	/	70	9.5
500FZL1-W		*	220/240	50	2.2	550	1350	4943	1	16/450	74	9.5
500FZL3-W		*	380/420	50	1.2	550	1350	4943	3	/	74	9.5



Φ550

550FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
550FZL2-W		*	220/240	50	1.2	360	900	3883	1	10/450	74	11.2
550FZL4-W		*	380/420	50	0.9	360	900	3883	3	/	74	11.2
550FZL1-W		*	220/240	50	1.4	550	1300	5648	1	10/450	79	11.2
550FZL3-W		*	380/420	50	1.4	550	1300	5648	3	/	79	11.2



Φ600

600FZL-W Series

Model	Bearing		Voltage (VAC)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (CFM)	Phase	Capacitor (μF/V)	Noise (dBA)	Weight (g)
	S	B										
600FZL2-W		*	220/240	50	1.6	330	660	7413	1	10/450	65	14
600FZL4-W		*	380/420	50	0.8	330	660	7413	3	/	65	14
600FZL1-W		*	220/240	50	2.4	520	900	9178	1	10/450	70	14
600FZL3-W		*	380/420	50	1.4	520	900	9178	3	/	70	14

130FLJ-WY Series



Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (m3/min)	Pressure (Pa)	Capacitor (μF/V)	Noise (dBA)	Weight (kg)
130FLJ1–2WY	110/120	1	50	0.8	85	2200	3.6	280	6.0/250	70	2.3
130FLJ2–2WY	220/230	1	50	0.4	85	2200	3.6	280	2.2/500	70	2.3
130FLJ3–2WY	380	3	50	0.2	85	2200	3.6	280	/	70	2.3
130FLJ4–2WY	380	1	50	0.25	85	2200	3.6	280	1.0/630	70	2.3
130FLJ5–2WY	110/120	1	50	1.1	120	2600	5.5	350	8.0/250	72	2.5
130FLJ6–2WY	220/230	1	50	0.55	120	2600	5.5	350	2.7/500	72	2.5
130FLJ7–2WY	380	3	50	0.3	120	2600	5.5	350	/	72	2.5
130FLJ8–2WY	380	1	50	0.35	120	2600	5.5	350	2.2/630	72	2.5

150FLJ-WY Series



Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (m3/min)	Pressure (Pa)	Capacitor (μF/V)	Noise (dBA)	Weight (kg)
150FLJ9–4WY	110/120	1	50	0.8	90	1400	7	250	8.0/250	60	3
150FLJ10–4WY	220/230	1	50	0.4	90	1400	7	250	6.0/500	60	3
150FLJ11–4WY	380	3	50	0.23	90	1400	7	250	/	60	3
150FLJ12–4WY	380	1	50	0.25	90	1400	7	250	0.8/630	60	3
150FLJ1–2WY	110/120	1	50	2	240	2650	9.5	450	16/250	75	3
150FLJ2–2WY	220/230	1	50	1	240	2650	9.5	450	5.0/500	75	3
150FLJ3–2WY	380	3	50	0.55	240	2650	9.5	450	/	75	3
150FLJ4–2WY	380	1	50	0.65	240	2650	9.5	450	1.8/630	75	3

130FLJ-N Series



Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (m3/min)	Pressure (Pa)	Capacitor (μF/V)	Noise (dBA)	Weight (kg)
130FLJ1–4N	110/120	1	50	0.54	50	1400	2.7	120	3.0/250	62	2.5
130FLJ2–4N	220/230	1	50	0.27	50	1400	2.7	120	1.0/500	62	2.5
130FLJ3–4N	380	3	50	0.14	50	1400	2.7	120	/	62	2.5
130FLJ4–4N	380	1	50	0.16	50	1400	2.7	120	0.47/630	62	2.5
130FLJ5–2N	110/120	1	50	1.9	180	2500	6.5	500	8.0/250	74	4.1
130FLJ6–2N	220/230	1	50	0.95	180	2500	6.5	500	2.7/500	74	4.1
130FLJ7–2N	380	3	50	0.5	180	2500	6.5	500	/	74	4.1
130FLJ8–2N	380	1	50	0.55	180	2500	6.5	500	1.0/630	74	4.1

150FLJ-N Series



Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air flow (m3/min)	Pressure (Pa)	Capacitor (μF/V)	Noise (dBA)	Weight (kg)
150FLJ1–2N	110/120	1	50	1.6	180	2500	6.5	460	10/250	76	5
150FLJ2–2N	220/230	1	50	0.8	180	2500	6.5	460	2.7/500	76	5
150FLJ3–2N	380	3	50	0.6	180	2500	6.5	460	/	76	5
150FLJ4–2N	380	1	50	0.7	180	2500	6.5	460	1.8/630	76	5
150FLJ5–2N	110/120	1	50	3.2	330	2700	11	460	12/250	80	6
150FLJ6–2N	220/230	1	50	1.6	330	2700	11	460	2.7/500	80	6
150FLJ7–2N	380	3	50	0.6	330	2700	11	460	/	80	6
150FLJ8–2N	380	1	50	0.95	330	2700	11	460	1.8/630	80	6

CNDF

ZHEJIANG
DONGFANG ELECTROMECHANICAL
CO., LTD.

CENTRIFUGAL FAN WITH BACKWARD CURVED BLADES

Bearing motor: Ball bearing
Direction of rotation: Clockwise, seen on rotor
Insulation class: "B"
Material of housing: Die–cast Aluminum
Material of impeller: Aluminum sheet, laser–welded
Motor protection: Thermal overload protector (TOP) wired internally
Mounting position: Shaft horizontal or rotor on bottom; rotor on top on request
Protection class: I (acc. to EN 61800–5–1)
Type of protection: IP 54



133, 190, 225, 250, 280, 310, 355, 400 Series

Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	AirFlow (m3/min)	Pressure (Pa)	Capacitor (μ F/V)	Noise (dBA)	Weight (kg)
133FLJ5–2W	110/120	1	50	0.22	25	2750	4.8	180	6.0/250	56	1.8
133FLJ6–2W	220/230	1	50	0.11	25	2750	4.8	180	1.5/500	56	1.8
190FLJ1–2W	110/120	1	50	0.76	85	2750	11	350	8.0/250	60	1.8
190FLJ2–2W	220/230	1	50	0.38	85	2750	11	350	2.7/500	60	1.8
190FLJ3–2W	380	3	50	0.22	85	2750	11	350		60	1.8
190FLJ4–2W	380	1	50	0.25	85	2750	11	350	2.0/500	60	1.8
225FLJ1–2W	110/120	1	50	1.2	140	2500	20	400	8.0/250	70	2.6
225FLJ2–2W	220/230	1	50	0.63	140	2500	20	400	2.7/500	70	2.6
225FLJ3–2W	380	3	50	0.38	140	2500	20	400	/	70	2.6
225FLJ4–2W	380	1	50	0.42	140	2500	20	400	1.0/630	70	2.6
250FLJ1–2W	110/120	1	50	2.0	220	2650	26	620	16/250	75	3.2
250FLJ2–2W	220/230	1	50	1.0	220	2650	26	620	5.0/500	75	3.2
250FLJ3–2W	380	3	50	0.6	220	2650	26	620	/	75	3.2
250FLJ4–2W	380	1	50	0.7	220	2650	26	620	1.0/630	75	3.2
280FLJ2–2W	220/230	1	50	1.08	200	2300	30	540	5.0/500	75	3.3
280FLJ3–2W	380	3	50	0.65	200	2370	30	540	/	75	3.3
310FLJ2–4W	220/230	1	50	0.5	140	1400	30	250	5.0/500	65	3.8
310FLJ3–4W	380	3	50	0.3	140	1400	30	250	/	65	3.8
355FLJ6–4W	220/230	1	50	1.12	250	1400	52	400	6/250	66	5.3
355FLJ7–4W	380	3	50	0.7	250	1400	52	400		66	5.3
400FLJ6–4W	220/230	1	50	1.0	320	1300	55	490	8.0/500	70	6
400FLJ7–4W	380	3	50	.0.61	320	1300	55	490	/	70	6
180FLJ4–4WK	380	1	50	0.3	100	1400	9.5	210	1.5/630	45	3
200FLJ1–4WK	110/120	1	50	0.7	80	1400	20	260	8/250	60	3
200FLJ2–4WK	220/230	1	50	0.35	80	1400	20	260	2.7/500	60	3
200FLJ3–4WK	380	3	50	0.18	80	1400	20	260	/	60	3
200FLJ4–4WK	380	1	50	0.24	80	1400	20	260	0.8/630	60	3

CENTRIFUGAL FAN WITH FORWARD CURVED BLADES

Bearing motor:	Ball bearing
Direction of rotation:	Clockwise, seen on rotor
Insulation class:	"B"
Material of housing:	Rotor: Coated in black
Material of impeller:	Hot–dip galvanized sheet steel
Motor protection:	Reverse polarity and locked–rotor protection
Mounting position:	Any
Protection class:	I
Type of protection:	IP 42




97, 120, 133, 140, 150, 160, 180, 200 Series

Model	Voltage (VAC)	Phase	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	AirFlow (m3/min)	Pressure (Pa)	Capacitor (μF/V)	Noise (dBA)	Weight (kg)
97FLJ1–2WK	110/120	1	50	0.32	35	2100	1.7	140	4.0/250	55	1.1
97FLJ2–2WK	220/230	1	50	0.16	35	2100	1.7	140	1.5/500	55	1.1
120FLJ1–2WK	110/120	1	50	0.7	80	2700	4.2	340	4.0/250	45	1.8
120FLJ2–2WK	220/230	1	50	0.35	80	2700	4.2	340	1.5/500	45	1.8
133FLJ1–2WK	110/120	1	50	0.8	85	2200	3.6	280	8.0/250	65	2.3
133FLJ2–2WK	220/230	1	50	0.4	85	2200	3.6	280	2.2/500	65	2.3
133FLJ3–2WK	380	3	50	0.2	85	2200	3.6	280	/	65	2.3
133FLJ4–2WK	380	1	50	0.2	85	2200	3.6	280	1.0/630	65	2.3
140FLJ1–2WK	110/120	1	50	0.7	90	2750	8	430	16/250	72	3
140FLJ2–2WK	220/230	1	50	0.35	90	2750	8	430	2.7/500	72	3
140FLJ3–2WK	380	3	50	0.18	90	2750	8	430	/	72	3
140FLJ4–2WK	380	1	50	0.2	90	2750	8	430	0.8/630	72	3
150FLJ1–2WK	110/120	1	50	2.2	140	2600	7.5	430	16/250	75	3
150FLJ2–2WK	220/230	1	50	1.1	140	2600	7.5	430	5.0/500	75	3
150FLJ3–2WK	380	3	50	0.55	140	2600	7.5	430	/	75	3
150FLJ4–2WK	380	1	50	0.65	140	2600	7.5	430	0.8/630	75	3
160FLJ1–2WK	110/120	1	50	2.2	260	2600	10.5	430	16/250	75	3
160FLJ2–2WK	220/230	1	50	1.1	260	2600	10.5	430	5.0/500	75	3
160FLJ3–2WK	380	3	50	0.55	260	2600	10.5	430	/	75	3
160FLJ4–2WK	380	1	50	0.65	260	2600	10.5	430	2.0/630	75	3
180FLJ1–4WK	110/120	1	50	0.7	100	1400	9.5	210	16/250	45	3
180FLJ2–4WK	220/230	1	50	0.42	100	1400	9.5	210	4.0/500	45	3
180FLJ3–4WK	380	3	50	0.25	100	1400	9.5	210	/	45	3
180FLJ4–4WK	380	1	50	0.3	100	1400	9.5	210	1.5/630	45	3
200FLJ1–4WK	110/120	1	50	0.7	80	1400	20	260	8/250	60	3
200FLJ2–4WK	220/230	1	50	0.35	80	1400	20	260	2.7/500	60	3
200FLJ3–4WK	380	3	50	0.18	80	1400	20	260	/	60	3
200FLJ4–4WK	380	1	50	0.24	80	1400	20	260	0.8/630	60	3

USE FOR AXIAL FAN

METAL GUARD, PLASTIC FILTER, SHUTTER FOR AXIAL FAN



Material: Metal wire mesh
Surface: galvanized, blue chormated



Material: Reinforced flame–retardant PA66
Color: Black



Body material: Flame retardant ABS resin
Strainer material: Nylon fibre synthetic resin

Metal Guard	Plastic Filter	Use for Axial Fan
TAF40	TAFP40	TF4010, TF4020
TAF50	TAFP50	TF5010, TF5015, TF5020
TAF60	TAFP60	TF6010, TF6015, TF6020, TF6025
TAF70	TAFP70	TF7015, TF7020, TF7025
TAF80	TAFP80	TF8015, TF8020, TF8025, TA8025, TA8038
TAF90	TAFP90	TF9225, TA9225, TA9238
TAF110	TAFP110	TA11025
TAF120	TAFP120	TF12025, TF12038, TA12025, TA12038
TAF125	TAFP125	TA17251
TAF145	TAFP145	TA15052
TAF150	TAFP150	TA15051
TAF180	TAFP180	TA18060
TAF200	TAFP200	TA20060

Shutter	Use for Axial Fan
9803	TA8025, TA8038, TA9225, TA12025, TA12038
7722.300	TA12025, TA12038
9804	TA12025, TA12038, TA15051, TA15052, TA17251, TA145FZY
9805	TA145FZY, TA15051, TA18060, TA20060, TA22060

CNDF








ZHEJIANG DONGFANG ELECTROMECHANICAL CO., LTD.

Add: No. 268, Wei 12 Road, Yueqing Central Industrial Park,
Wenzhou, Zhejiang, 325600 China
Mobile: +86-15967799569
Tel: +86-577-62662333
Fax: +86-577-62055288
Website: www.cndf.net
E-mail: export@cndf.net mycndf@gmail.com
MSN: mycndf@hotmail.com
Skype: mycndf