

# Implementation and comparison of register allocation to translate LLVM-- to x86

William Welle Tange

2023

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Review of Literature</b>	<b>2</b>
2.1	Control Flow Analysis . . . . .	2
2.2	Liveness Analysis . . . . .	3
2.3	Graph Coloring . . . . .	3
2.4	Linear Scan . . . . .	3
<b>3</b>	<b>LLVM-- instruction set</b>	<b>3</b>
<b>4</b>	<b>Control Flow Analysis</b>	<b>4</b>
<b>5</b>	<b>Liveness Analysis</b>	<b>4</b>
<b>6</b>	<b>Graph Coloring</b>	<b>4</b>
6.1	Coalescing . . . . .	4
<b>7</b>	<b>Linear Scan</b>	<b>4</b>
<b>8</b>	<b>Instruction Selection</b>	<b>4</b>
<b>9</b>	<b>Further Optimization</b>	<b>5</b>
<b>10</b>	<b>Evaluation</b>	<b>5</b>
10.1	Benchmarking . . . . .	5
10.2	Comparison to other work and ideas for future work . . . . .	6
<b>11</b>	<b>Conclusion</b>	<b>6</b>
<b>A</b>	<b>LLVM- instruction set</b>	<b>7</b>
<b>B</b>	<b>Benchmarks</b>	<b>7</b>

# 1 Introduction

Compilation refers to the process of translating from one language to another, most often from a programming language intended for humans to work with, to machine-/bytecode intended to be executed on a target platform. This process can be divided into several distinct phases, which are grouped into one of two stages, colloquially referred to as the *frontend* and *backend*. The former translating a high-level programming language to an *intermediate representation* (IR) layer and the latter translating IR to executable machine code on a target platform (e.g. x86, ARM) or bytecode for a target VM (e.g. JVM, CLR).

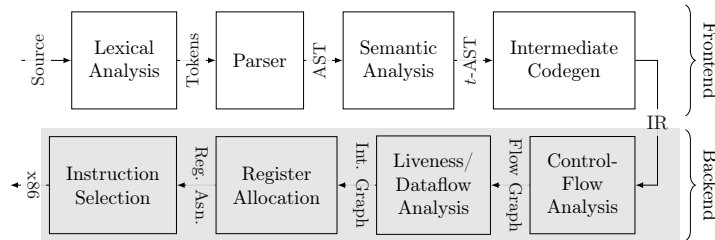


Figure 1: Compiler phases, backend highlighted

A critical part of the backend stage is assigning each variable (also referred to as *virtual*) of the source program to a physical register on the target processor.

## 2 Review of Literature

The two primary sources are the Tiger- [1] and Dragonbook [2], in addition to scientific publications concerning the linear scan approach.

### 2.1 Control Flow Analysis

The backend of a compiler takes some form of IR as input, usually a linear sequence of instructions for each separate function. This representation is close to the level of an actual processor by design, but it isn't immediately useful for the further analysis steps needed to generate optimized code for the target architecture. The control flow of a given program refers to the order in which instructions are executed. While the flow of most instructions is linear, in the sense that the next instruction to be executed is located immediately after, some send the execution elsewhere or outright terminate it.

These instructions are referred to as *terminators*, as they potentially terminate a contiguous flow of execution. This subset of instructions can be further divided into *branch instructions* and those concerned with handling the callstack in function/subroutine management.

hence a *control flow graph* is derived from these. A terminator will branch elsewhere to continue execution. The destination of this has to be an annotated by a label, hence labels *initiate* blocks.

## 2.2 Liveness Analysis

Liveness analysis is the process of finding the program points at which a variable is live. This serves the function of determining which variables are live simultaneously, i.e. in interference/conflict with one another, which cannot be assigned the same physical register without overwriting the value of one another in execution. These can be derived recursively by iteratively applying so-called *dataflow equations* to each node in a *control-flow graph* (CFG) until a stable state/fixed point is reached.

The algorithm described in [1] and [2] is based on the following equations for the live-in and live-out variables respectively:

$$in[n] = use[n] \cup (out[n] - def[n]) \quad (1)$$

$$out[n] = \bigcup_{s \in succ[n]} in[s] \quad (2)$$

where  $use[n]$  is the set of all dependent variables,  $def[n]$  is the set of all variables defines and  $succ[n]$  is the set of all immediate successor nodes of  $n$ .

The structure of the CFG is inherently vague as both *Modern Compiler Implementation in ML* [1] and *Compilers : Principles, Techniques, and Tools* [2], while based on the same underlying conceptions of dataflow, have different approaches to nodes of a CFG, with the former taking each individual instruction into consideration and the latter each basic block. Either of these approaches are sound

## 2.3 Graph Coloring

## 2.4 Linear Scan

## 3 LLVM-- instruction set

The intermediate representation emitted by the frontend of a compiler serves as a stepping stone independent of the target architecture. The LLVM infrastructure is the industry standard in terms of bridging this gap and was consequently the library used to translate the semantically annotated abstract syntax tree to executable machine code in the 2022 compilers course. As this project is an expansion on this, it follows naturally to build on this.

The instruction set used in this paper will be a union of the sets used in the 2022 and 2023 compilers courses in order to work as a drop-in replacement of LLVM for either of the two respective source languages: Tiger and Dolphin. This instruction set is a subset of the one used in practice, as, for instance,

neither of the languages implemented support exception handling, floating point operations and so on, and instead only strive to cover the basics of compilers.

The instructions included are `trunc` has only been added in order to help cover more generated LLVM. The branching for most of these is trivial: after successful execution the flow of all but `br`, `ret` and `unreachable` will unconditionally attempt to execute the next instruction in memory (i.e. increment the instruction pointer by instruction length).

Because of this, these instructions are referred to as *terminators*, as their purpose is to disrupt what had otherwise been a linear flow from the beginning of this continuous sequence of instructions, henceforth referred to as a *basic block*.

## 4 Control Flow Analysis

With an input stream of instructions

Each function defined in an LLVM program is constructed with the help of

## 5 Liveness Analysis

Dataflow analysis

## 6 Graph Coloring

The graph coloring by simplification as described by Appel

### 6.1 Coalescing

## 7 Linear Scan

## 8 Instruction Selection

Translating each IR instruction to x86 correctly is a matter of eliminating unintended side-effects. Each LLVM- instruction is defined to have only one purpose, as concepts such as calling conventions, stack frames, or a `FLAGS` register are completely abstracted over in order to remain platform independent.

In contrast, the x86 *instruction set architecture* (ISA) is targeting a *complex instruction set computer* (CISC) family of processors, the instructions of which perform a much broader set of operations [1, p. 190]. This is in part due to pipelining, i.e. an abstraction over the concrete implementation of the actual processor, which in turn is made for the sake of performance.

An example of this would be the division/remainder operation: since integer division is a non-trivial iterative process wherein both the quotient and remainder is needed throughout, the result of both of these is stored in the `%rax` and `%rdx` registers respectively. This means two operations are performed

simultaneously regardless of which value is used, hence they need to be restored before executing the next instruction, as any variables assigned to `%rax` or `%rdx` will be overwritten.

sha256	-O0	-O1	-O2	-O3
1000000	1	0.73	0.73	0.73

## 9 Further Optimization

## 10 Evaluation

Relevant metrics by which to compare these variations are naturally the performance of the code generated at runtime, but also the time efficiency at compile-time. While the code written isn't expected to outperform LLVM, due to the time complexity of the linear scan and simplification algorithms implemented their respective runtime performances are expected to outperform the builtin graph coloring algorithm.

Another factor worth considering would be memory usage, caches misses, garbage collection (although not relevant to this as it doesn't use GC), vectorization (loop optimizations by SIMD) etc.

### 10.1 Benchmarking

Benchmarks are performed on Apple Silicon (M1 Pro, i.e. ARMv8.5-A [3]) despite the target instruction set being x86-64. This is possible because of Rosetta 2, which translates x86-64 to ARMv8 before execution [4]. Time is measured using the `time` function of the bash shell as it is native to the chosen Docker image. As all execution relevant to the performance of register allocation is done in user mode, only the `user` metric is noted.

```

cell1  cell2  cell3
cell4  cell5  cell6
cell7  cell8  cell9

```

sha256	-O0	-O1	-O2	-O3
1000000	1	0.73	0.73	0.73

## 10.2 Comparison to other work and ideas for future work

## 11 Conclusion

## References

- [1] A. W. Appel, *Modern Compiler Implementation in ML*, eng. Cambridge University Press, 1997, ISBN: 0521582741.
- [2] A. V. Aho and A. V. Aho, *Compilers : Principles, Techniques, and Tools*. eng, 2. ed. Reading, Mass: Addison-Wesley, 2007, ISBN: 0321486811.
- [3] Domaine, F. Brandner, B. Boissinot, A. Darté, B. Dinechin, and F. Rastello, “Computing liveness sets for ssa-form programs,” Apr. 2011.
- [4] M. Poletto and V. Sarkar, “Linear scan register allocation,” eng, *ACM transactions on programming languages and systems*, vol. 21, no. 5, pp. 895–913, 1999, ISSN: 0164-0925.

## A LLVM– instruction set

1. binary operations `add`, `and`, `ashr`, `lshr`, `mul`, `or`, `sdiv`, `srem`, `shl`, `sub` and `xor`
2. integer comparison `icmp` (conditions being `eq`, `ne`, `sge`, `sgt`, `sle` and `slt`)
3. memory/address operations `alloca`, `gep`, `load` and `store`
4. `mov` operations `gep`, `phi`, `ptrtoint`, `trunc`, and `zext`
5. control flow operations `br`, `call` and `ret`
6. a nullary terminator `unreachable`

## B Benchmarks

### B.1 `benches/fib.ll`

```
declare i32 @atoi(i8*)
define i32 @fib(i32 %n0) {
    %cn = icmp sle i32 %n0, 2
    br i1 %cn, label %base, label %rec
base:
    ret i32 1
rec:
    %n1 = sub i32 %n0, 1
    %v0 = call i32 @fib(i32 %n1)
    %n2 = sub i32 %n0, 2
    %v1 = call i32 @fib(i32 %n2)
    %v2 = add i32 %v1, %v2
    ret i32 %v2
}
define i32 @main(i32 %argc, i8** %argv) {
    %arglptr = getelementptr i8*, i8** %argv, i64 1
    %arg1 = load i8*, i8** %arglptr
    %n = call i32 @atoi(i8* %arg1)
    call i32 @fib(i32 %n)
    ret i32 0
}
```

### B.1.1 make fib-clang

```
$ make fib-clang
clang -O0 -target x86_64-unknown-darwin benches/fib.ll -o
    fib-clang
```

#### B.1.1.1 make bench fib-clang 42

```
$ make bench fib-clang 42
/usr/bin/time -al ./fib-clang 42
    1.58 real        1.56 user        0.00 sys
    2678784 maximum resident set size
         0 average shared memory size
         0 average unshared data size
         0 average unshared stack size
       765 page reclaims
         0 page faults
         0 swaps
         0 block input operations
         0 block output operations
         0 messages sent
         0 messages received
         0 signals received
         0 voluntary context switches
        29 involuntary context switches
11000239251 instructions retired
  4962802652 cycles elapsed
    1708928 peak memory footprint
```

#### B.1.1.2 make bench fib-clang 43

```
make bench fib-clang 43
$ /usr/bin/time -al ./fib-clang 43
    2.71 real        2.49 user        0.00 sys
    2678784 maximum resident set size
         0 average shared memory size
         0 average unshared data size
         0 average unshared stack size
       700 page reclaims
        66 page faults
```



```

0 swaps
0 block input operations
0 block output operations
0 messages sent
0 messages received
0 signals received
13 voluntary context switches
32 involuntary context switches
17797124508 instructions retired
8035601598 cycles elapsed
1708928 peak memory footprint

```

#### B.1.1.3 **make bench fib-clang 44**

```

$ make bench fib-clang 44
/usr/bin/time -al ./fib-clang 44
4.06 real          4.04 user          0.00 sys
2678784 maximum resident set size
0 average shared memory size
0 average unshared data size
0 average unshared stack size
700 page reclaims
66 page faults
0 swaps
0 block input operations
0 block output operations
0 messages sent
0 messages received
0 signals received
5 voluntary context switches
29 involuntary context switches
28781328564 instructions retired
12988681489 cycles elapsed
1708928 peak memory footprint

```

#### B.1.1.4 **make bench fib-clang 45**

```

$ make bench fib-clang 45
/usr/bin/time -al ./fib-clang 45
6.54 real          6.51 user          0.00 sys
2678784 maximum resident set size

```

```

0 average shared memory size
0 average unshared data size
0 average unshared stack size
700 page reclaims
66 page faults
0 swaps
0 block input operations
0 block output operations
0 messages sent
0 messages received
0 signals received
6 voluntary context switches
39 involuntary context switches
46555259189 instructions retired
20968319385 cycles elapsed
1708928 peak memory footprint

```

#### B.1.1.5 **make bench fib-clang 46**

```

$ make bench fib-clang 46
/usr/bin/time -al ./fib-clang 46
10.58 real      10.54 user      0.00 sys
2678784 maximum resident set size
0 average shared memory size
0 average unshared data size
0 average unshared stack size
700 page reclaims
66 page faults
0 swaps
0 block input operations
0 block output operations
0 messages sent
0 messages received
0 signals received
5 voluntary context switches
107 involuntary context switches
75314385847 instructions retired
33939361073 cycles elapsed
1725376 peak memory footprint

```

#### B.1.1.6 **make bench fib-clang 47**

```

$ make bench fib-clang 47
/usr/bin/time -al ./fib-clang 47
    17.09 real        17.06 user        0.00 sys
    2678784 maximum resident set size
         0 average shared memory size
         0 average unshared data size
         0 average unshared stack size
       766 page reclaims
         0 page faults
         0 swaps
         0 block input operations
         0 block output operations
         0 messages sent
         0 messages received
         0 signals received
         0 voluntary context switches
        100 involuntary context switches
121838577947 instructions retired
 54901966523 cycles elapsed
   1708928 peak memory footprint

```

#### B.1.1.7 **make bench fib-clang 48**

```

$ make bench fib-clang 48
/usr/bin/time -al ./fib-clang 48
    27.65 real        27.59 user        0.00 sys
    2678784 maximum resident set size
         0 average shared memory size
         0 average unshared data size
         0 average unshared stack size
       766 page reclaims
         0 page faults
         0 swaps
         0 block input operations
         0 block output operations
         0 messages sent
         0 messages received
         0 signals received
         0 voluntary context switches
        161 involuntary context switches
197130073055 instructions retired
 88835375488 cycles elapsed

```

1708928 peak memory footprint