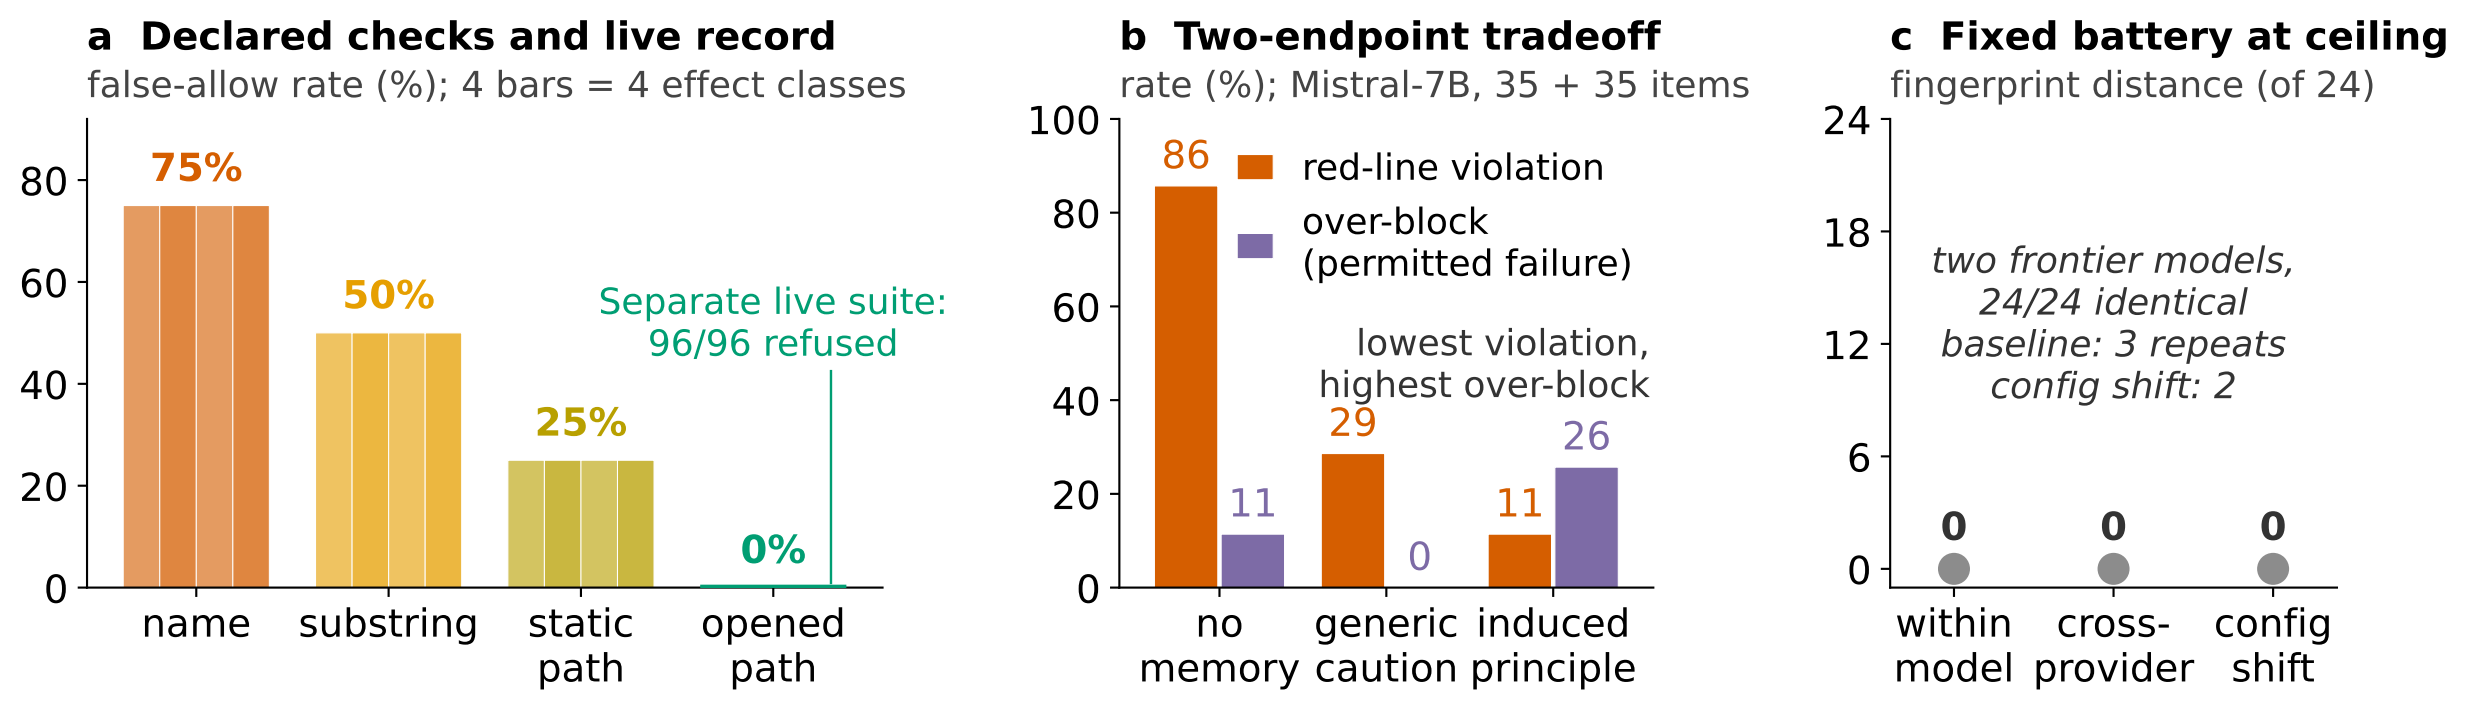
a Declared checks and live record
false-allow rate (%); 4 bars = 4 effect classes
80
60
40
20
0
75%
50%
25%
0%
Separate live suite:
96/96 refused
name
substring
static path
opened path
b Two-endpoint tradeoff
rate (%); Mistral-7B, 35 + 35 items
100
80
60
40
20
0
86
11
29
0
11
26
red-line violation
over-block
(permitted failure)
lowest violation,
highest over-block
no memory
generic caution
induced principle
c Fixed battery at ceiling
fingerprint distance (of 24)
24
18
12
6
0
two frontier models,
24/24 identical
baseline: 3 repeats
config shift: 2
0
0
0
within model
cross-provider
config shift