


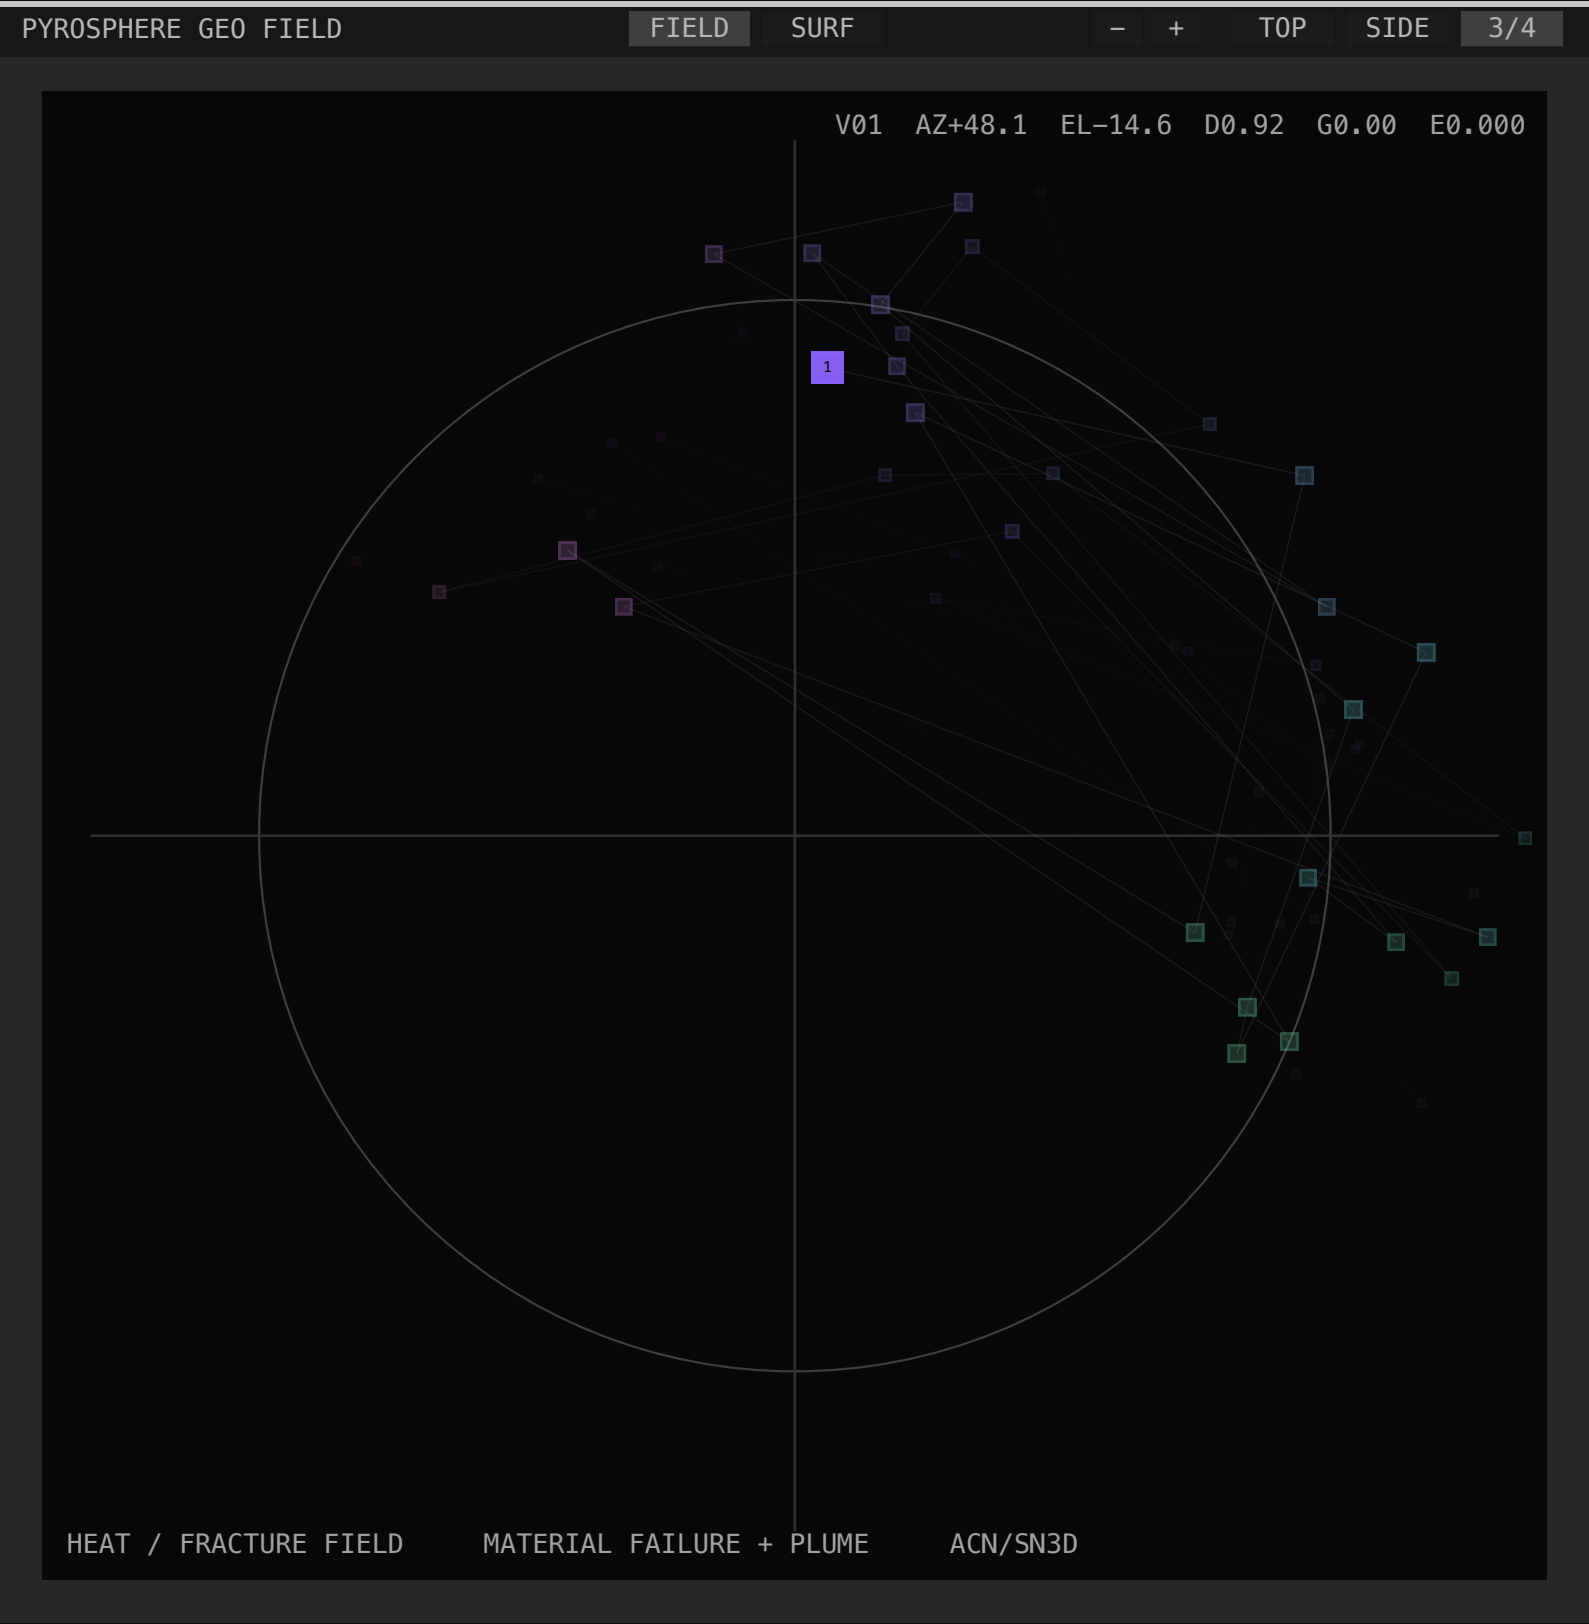

OUTPUT / AIR

OUT

-8 dB

ORDER

30A

v

AIR

38%

HISS

29%

HEAT AND MATERIAL

PLUME WANDER

0 Hz

MATERIAL

METAL

v

VOICES

20.00

HEAT

34 %

IGNITION RATE

19mHz

SPREAD

39%

DEVIATION

12%

COMBUSTION DYNAMICS

IGNITION EDGE

SOFT

v

FLARE DEPTH

44%

ROAR

36%

FLICKER

27%

MATERIAL LOAD

58%

FLAME SHAPE

SURGE

BURN CORE

43%

MATERIAL RESPONSE

FLAME COLOR

39%

BRITTLENESS

31%

COMB DETAIL

28%

PYROLYSIS

40%

OXYGEN

33%

CHAR

12%

THERMAL TRANSPORT

FIELD RATE

0 Hz

FLOW PUSH

50%

SHEAR

32%

CURL

0.48

UPDRAFT

38%

DEPTH PUSH

56%

INERTIA

42%

MACRO PLUME VECTOR

DIRECTION

16deg

ELEVATION

-0.2 d

RANGE

1.09

ENVIRONMENT FIELD

PLACE

CANYON

v

ENV RETURN

36%

ENV SIZE

56%

ENV DECAY

43%

ENV DAMPING

51%

LISTEN

OFF

v

LISTEN AMOUNT

100%

RESPONSE

DIRECT

v

STRUCTURAL CONSEQUENCES

FRAGMENTS

10%

PLUME VORTEX

24%

PRESSURE

45%

STRUCT LOAD

12%

BRANCH SNAP

36%

TREE FALL

9%

ALEATORIC ENTITY SCORE

8 ENT / 7 ARCS / 0.02 ACT

PACE

38%

MEMORY

66%

OCCUPANCY

31%

REST

64%

CASCADE

56%