

LIGHT FOR THE FUTURE



<http://en.jmyds.com>

MAGNET SYSTEM




MAGNET SYSTEM series


磁吸灯系列

Magnetic system is a Low voltage multi-purpose system with various solutions, including spotlights, pendants and linear lighting. It can be installed both vertically and horizontally, and has recessed, surface and hanging versions. Low Voltage offers designers plenty of freedom, as it can illuminate versatile spaces. By adjusting and moving the light points, they can be adapted to changing lighting requirements.


RECESSED

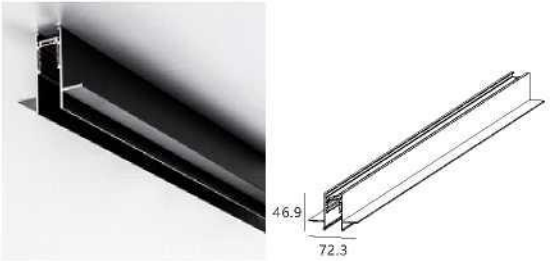


Type	Electrical parameters	Maximum current	Length (mm)
E20RT001	DC 48V	4A max	W72.3*H46.9*T2.0




E20RT-L01




E20RT-J01




E20RT-L03




E20END01




E20ST-C01



LD20E00




LD20E02




LD20E01


SURFACE MOUNTED / PENDENT

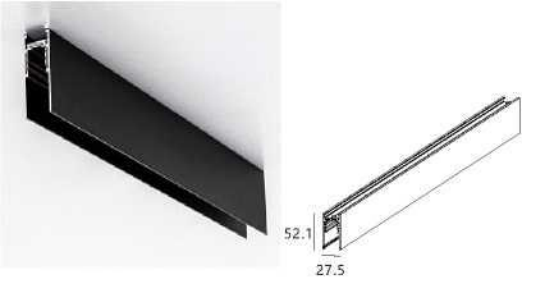


Type	Electrical parameters	Maximum current	Length (mm)
E20ST001	DC 48V	4A max	W27.5*H52.1*T2.0




E20ST-L01



E20ST-J01




E20ST-P01


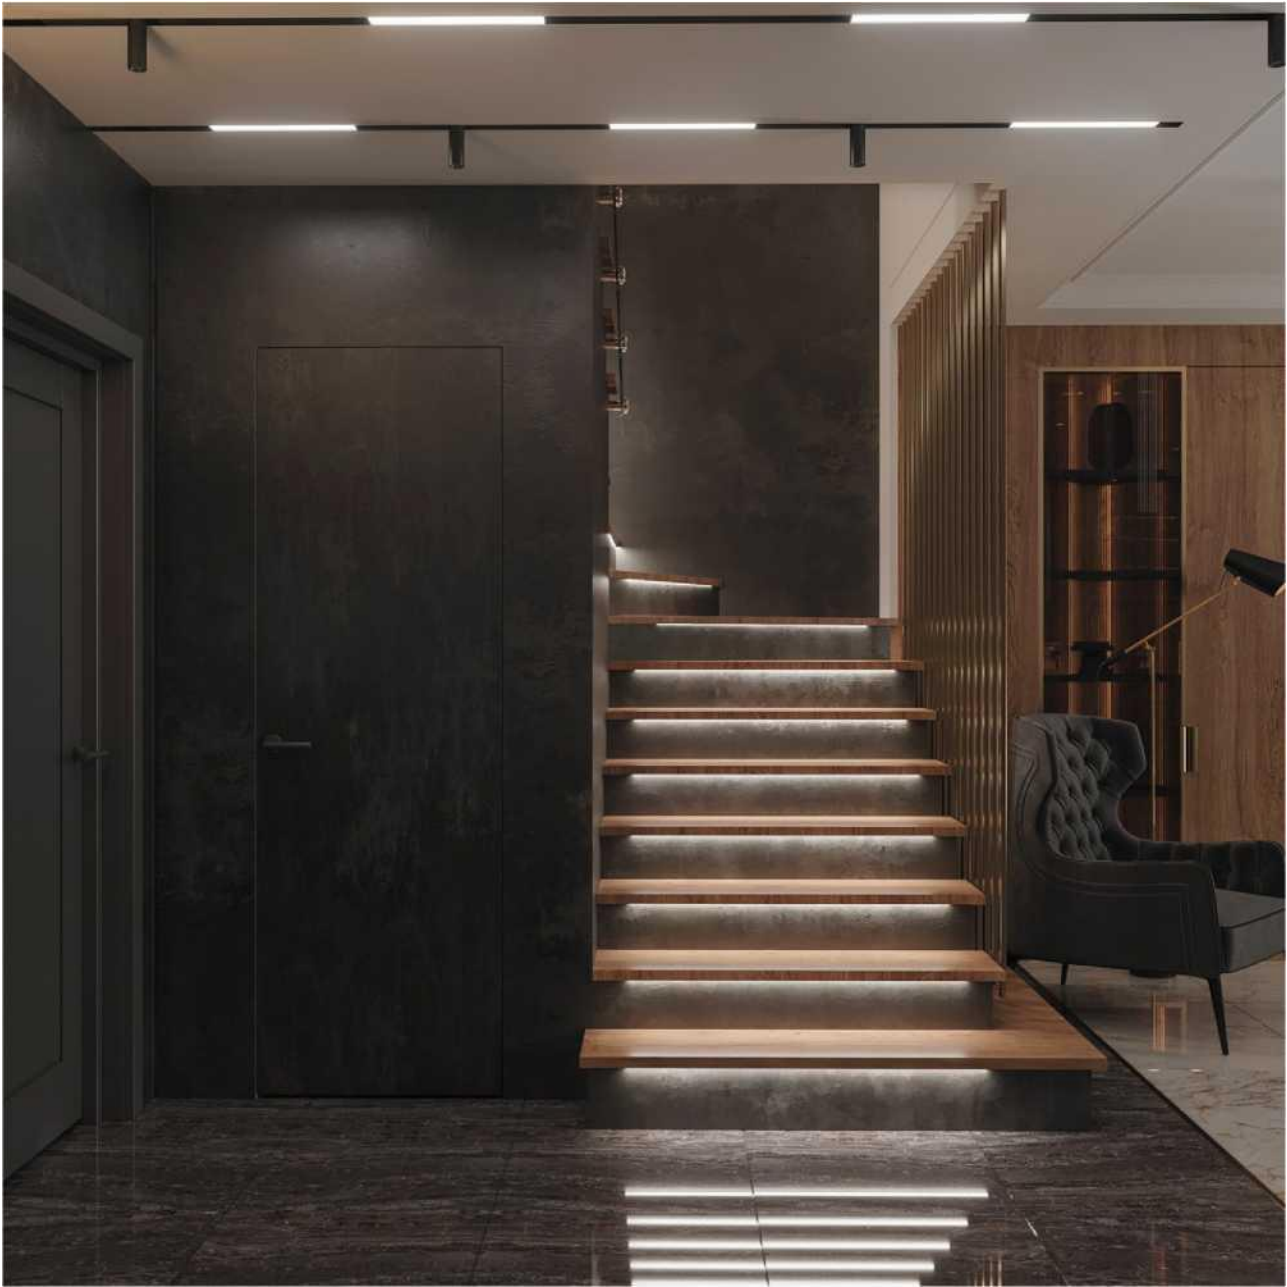




MAGNET SYSTEM series

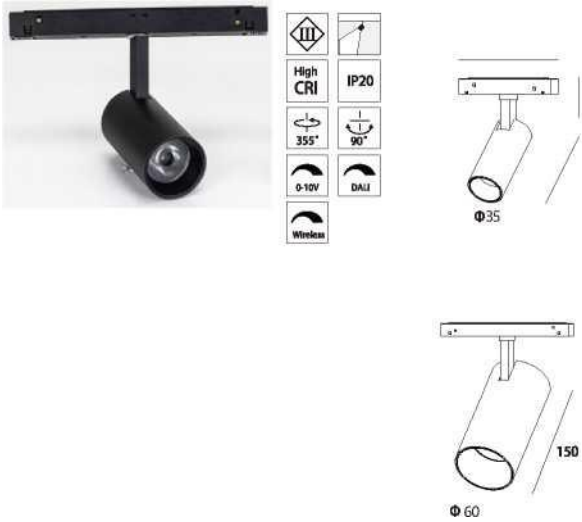

E2120335	E2120350
Mains voltage: DC 48V	Light Source: CREE COB Mains voltage: DC 48V
Power: 7W	Power: 12W
CRI: Ra>80	CRI: Ra>80
CCT: 2700K/3000^4000K/6000K	CCT: 2700K/3000^4000K/6000K
OPTIC: 15° /24° /36°	OPTIC: 15° /24° /36°
	(D45)
E2120365	E2120380
Light Source: CREE COB	Light Source: CREE COB
Mains voltage: DC 48V	Mains voltage: DC 48V
Power: 18W	Power: 24W
CRI: Ra>80	CRI: Ra>80
CCT: 2700K/3000^4000K/6000K	CCT: 2700K/3000K/4000K/6000K
OPTIC: 15° /24° /36°	OPTIC: 15° /24° /36°

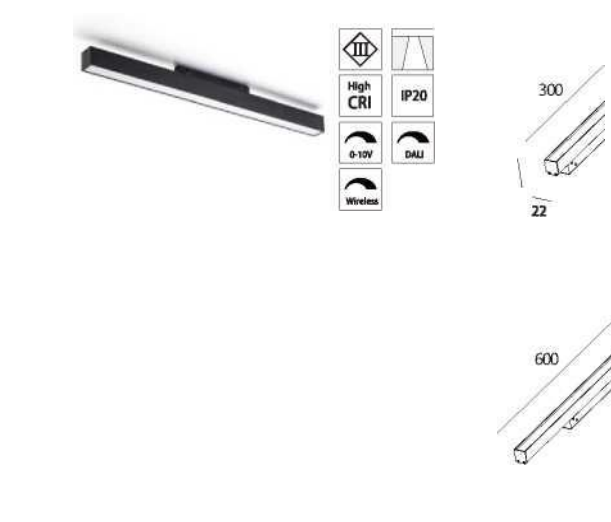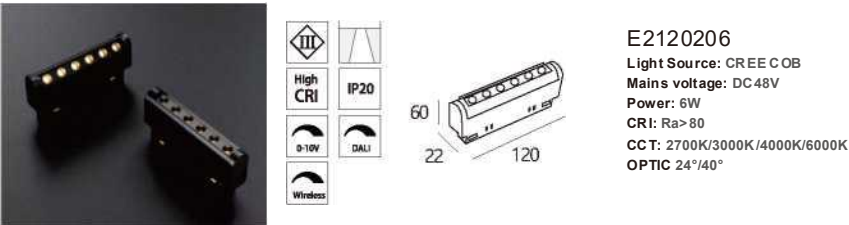

E1020300
Light Source: 2835 LED
Mains voltage: DC 48V Power: 10W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 100°

E1020450
Light Source: 2835 LED
Mains voltage: DC 48V
Power: 15W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 100°


E1020600
Light Source: 2835 LED
Mains voltage: DC 48V
Power: 20W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 100°

E1020900
Light Source: 2835 LED
Mains voltage: DC 48V Power: 30W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 100°



E1120106
Light Source: 2835 LED
Mains voltage: DC 43V
Power: 6W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 24°/40°

E1120112
Light Source: 2835 LED
Mains voltage: DC 48V
Power: 12W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 24°/40°

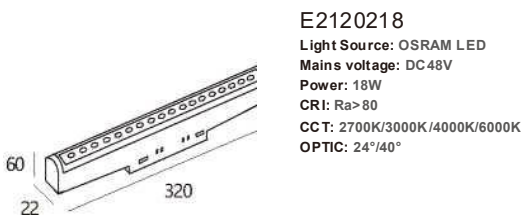


E2120212
Light Source: OSRAM LED
Mains voltage: DC 48V
Power: 12W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 24°/40°




E1120118
Light Source: 2835 LED
Mains voltage: DC 43V Power: 18W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 24°/40°

E1120124
Light Source: 2835 LED
Mains voltage: DC 48V
Power: 24W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 24°/40°

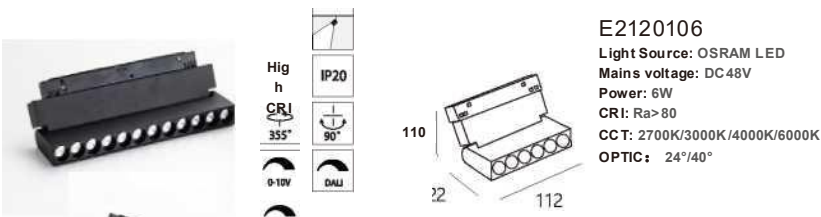

E2120106
Light Source: OSRAM LED
Mains voltage: DC 48V
Power: 6W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 24°/40°

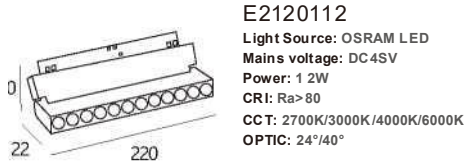

E2120112
Light Source: OSRAM LED
Mains voltage: DC 43V
Power: 12W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 24°/40°

COLORS

BK

COLORS

BK



PENDANT LIGHT series

吊灯系列

Simple fashionable design, comfortable lighting
experience Combine optics with practicality to create
your own lighting solution.





MAGNET SYSTEM series



MAGNET SYSTEM series




MAGNET SYSTEM series



MAGNET SYSTEM series





MAGNET SYSTEM series




E3020201
Light Source: CREE COB
Mains voltage: DC48V
Power: 7W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 15° /24° /36°





E3020202
Light Source: CREE COB
Mains voltage: DC48V
Power: 7W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 15° /24° /36°




E3020401
Light Source: CREE COB
Mains voltage: DC48V
Power: 7W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 15° /24° /36°



E3020301
Light Source: CREE COB
Mains voltage: DC48V
Power: 7W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 15° /24° /36°




E3020101
Light Source: CREE COB
Mains voltage: DC48V
Power: 6W
CRI: Ra>80
CCT: 2700K/3000K/4000K/6000K
OPTIC: 15° /24° /36°



E3020102
Light Source: CREE COB
Mains voltage: DC48V
Power: 10W
CRI: Ra>80
CCT: 2700K/3000^4000K/6000K
OPTIC: 15° /24° /36°

COLORS



COLORS

