

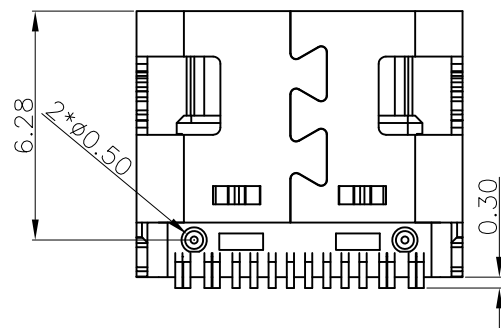
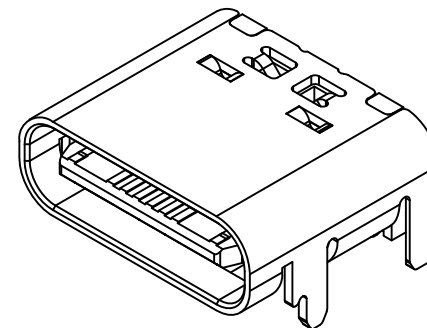
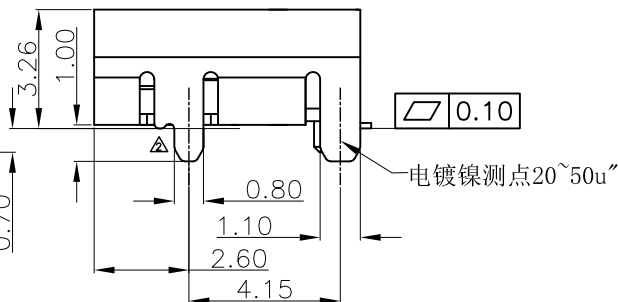
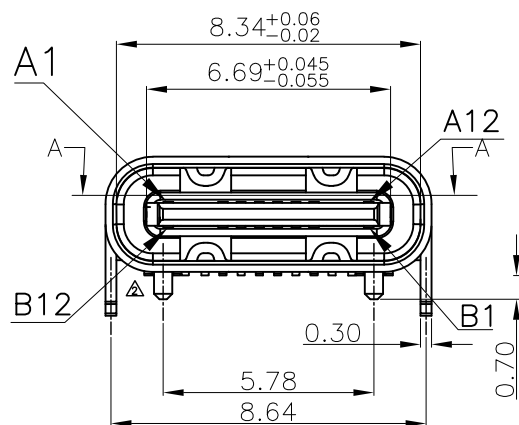
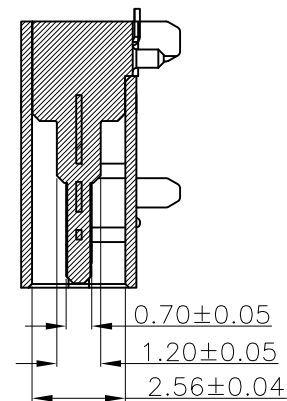
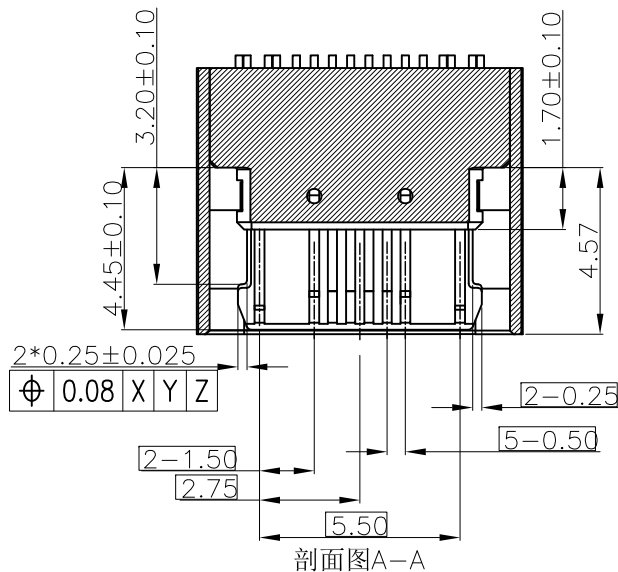
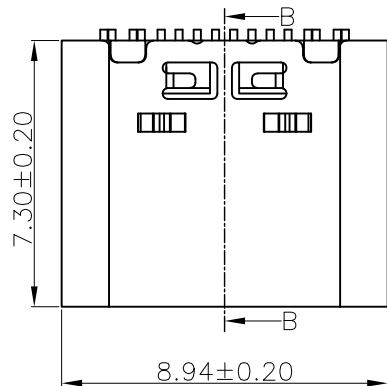



RoHS

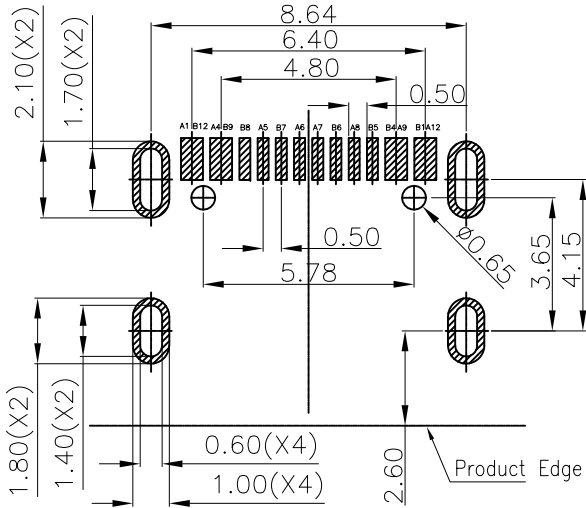

UNITS mm	SCALE 1:1	REV. B3	SHEET 1 OF 2	深圳市汉德电子科技有限公司 SHENZHEN HANDE TECHNOLOGY CO., LTD.			
 GENERAL TOLERANCE X. ±0.25 X.X ±0.20 X.XX ±0.15 X.XXX ±0.01 X.X* ±5° X.XX* ±2°		DATE 2017.04.15		TITLE USB TYPE-C F 16P 3次MOLDING			
		DR. LIN YUN		MAT'L SEE TABLE		FINISH SEE TABLE	
		CHK. LI JY		DWG.NO.		PART NO. SEE TABLE	
		APPD. ZHANG		A		SIZE A4	

RoHS

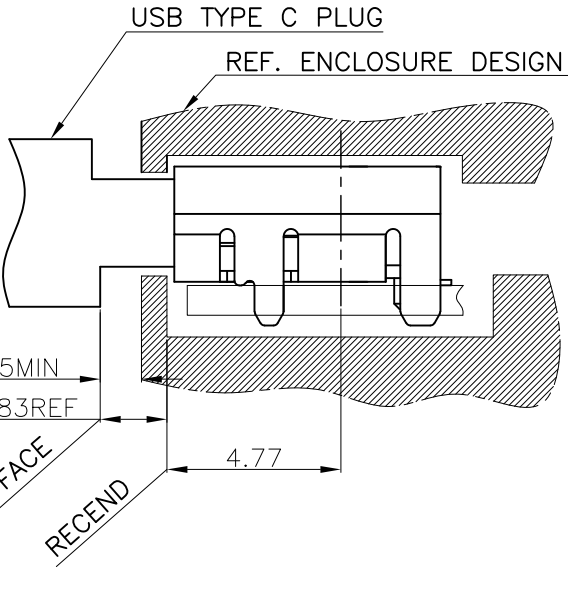

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- Specification:
- 1.Electrical Characteristics:
 - Contact Current Rating: 5 Amperes Max.
 - Rated Voltage: 20V Max.
 - Dielectric Withstanding Voltage: AC 100V r.m.s.
 - Insulation Resistance: 100 MΩ Minimum.
 - Contact Resistance: 40 mΩ Maximum.
 - 2.Environmental:
 - Operating Temperature: -40°C~+85°C.
 - 3.Mechanical Characteristics:
 - Insertion Force: 5~20Nf.
 - Withdrawal Force: 8~20Nf.
 - Durability Cycles: 10,000 Cycles.

4	SHIELDING PLATE	STAINLESS STEEL(SUS301)	-----
3	SHELL	STAINLESS STEEL(SUS304)	NI Palated
2	TERMINAL	HIGH CONDUCTIVITY COPPER(C7025)	Au 1u"
1	HOUSING	HIGH TEMPERATURE PLASTIC(PA10T)	UL 94V-0
NO.	DESCRIPTION	MATERIAL	REMARK

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

UNITS mm	SCALE 1:1	REV. B3	SHEET 2 OF 2	深圳市汉德电子科技有限公司 SHENZHEN HANDE TECHNOLOGY CO., LTD.			
		DATE 2017.04.15		TITLE USB TYPE-C F 16P 3次MOLDING			
		DR. LIN YUN		MAT'L SEE TABLE		FINISH SEE TABLE	
		CHK. LI JY		DWG.NO.		PART NO. SEE TABLE	
		APPD. ZHANG				A	
GENERAL TOLERANCE X. ±0.25 X.X ±0.20 X.XX ±0.15 X.XXX ±0.01 X.X* ±5° X.XX* ±2°						SIZE A4	