


# YCSB-B latency: Single WAL vs P-WAL vs Cstamp-PWAL

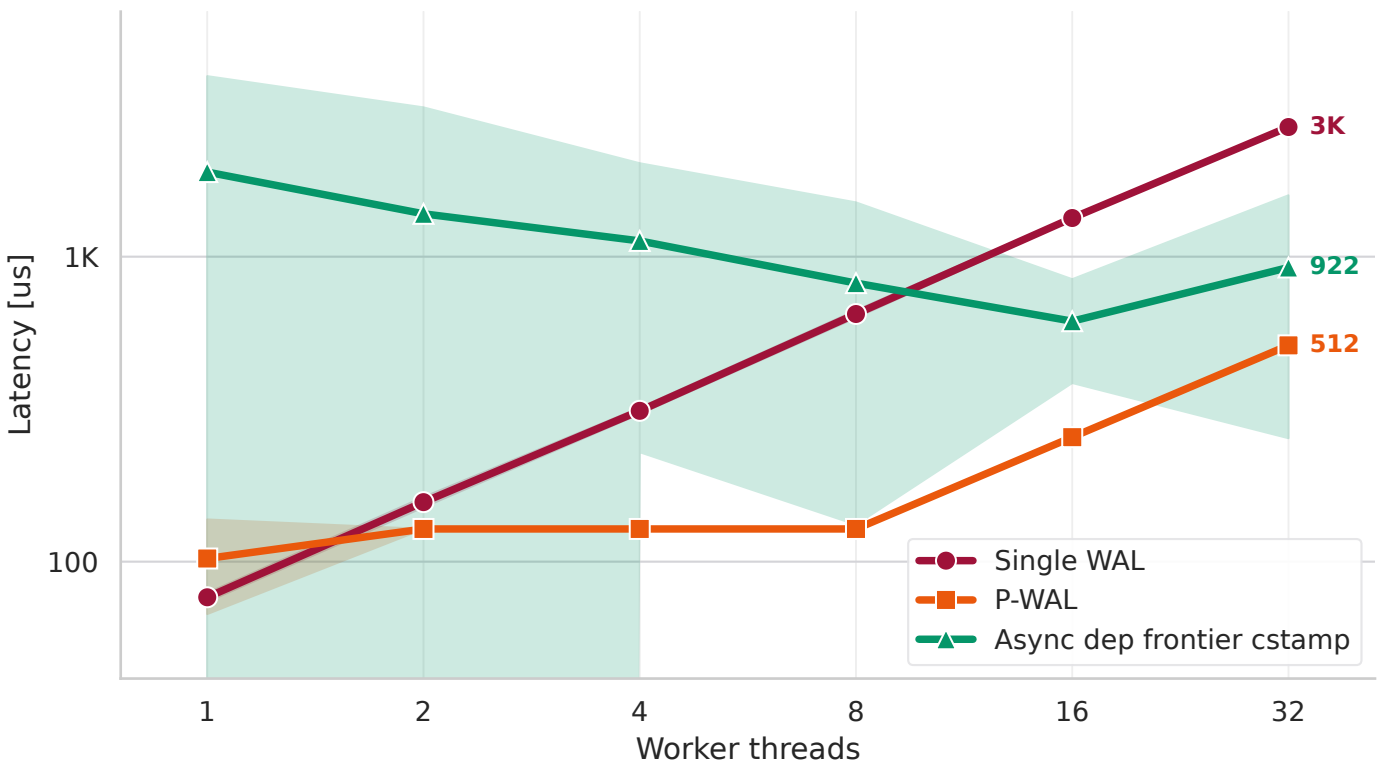

Single WAL uses closed-loop average fallback; P-WAL/Cstamp use measured p99 durable-ack latency.