



redisvanilla2

Intel Core i7-8850H testing with a Dell 0WCMKT (1.7.3 BIOS) and Intel UHD 630 3GB on Fedora 32 via the Phoronix Test Suite.

Test Systems:

Intel Core i7-8850H - Intel UHD 630 3GB - Dell 0WCMKT

Processor: Intel Core i7-8850H @ 4.30GHz (6 Cores / 12 Threads), Motherboard: Dell 0WCMKT (1.7.3 BIOS), Chipset: Intel Cannon Lake PCH, Memory: 16384MB, Disk: PM981 NVMe Samsung 512GB, Graphics: Intel UHD 630 3GB (1150MHz), Audio: Realtek ALC3246, Network: Intel I219-LM + Qualcomm Atheros QCA6174 802.11ac

OS: Fedora 32, Kernel: 5.7.7nocamflow0.7.0+ (x86_64), Desktop: GNOME Shell 3.36.7, Display Server: X Server 1.20.9 + Wayland, Display Driver: modesetting 1.20.9, OpenGL: 4.6 Mesa 20.2.2, Compiler: GCC 10.2.1 20201016 + Clang 10.0.1, File-System: ext4, Screen Resolution: 1920x1080

Environment Notes: MFLAGS= MAKEFLAGS=

Compiler Notes: --build=x86_64-redhat-linux --disable-libunwind-exceptions --enable-__cxa_atexit --enable-bootstrap --enable-cet --enable-checking=release --enable-gnu-indirect-function --enable-gnu-unique-object --enable-initfini-array --enable-languages=c,c++,fortran,objc,obj-c++,ada,go,d,lto --enable-multilib --enable-offload-targets=nvptx-none --enable-plugin --enable-shared --enable-threads=posix --mandir=/usr/share/man --with-arch_32=i686 --with-gcc-major-version-only --with-isl --with-linker-hash-style=gnu --with-tune=generic --without-cuda-driver


Processor Notes: Scaling Governor: intel_pstate powersave

Security Notes: SELinux + itlb_multihit: KVM: Mitigation of Split huge pages + I1tf: Mitigation of PTE Inversion; VMX: conditional cache flushes SMT vulnerable + mds: Mitigation of Clear buffers; SMT vulnerable + meltdown: Mitigation of PTI + spec_store_bypass: Mitigation of SSB disabled via prctl and seccomp + spectre_v1: Mitigation of usercopy/swapgs barriers and __user pointer sanitization + spectre_v2: Mitigation of Full generic retpoline IBPB: conditional IBRS_FW STIBP: conditional RSB filling + srbds: Mitigation of Microcode + tsx_async_abort: Mitigation of Clear buffers; SMT vulnerable

| Intel Core i7-8850H - Intel UHD 630 3GB - Dell 0WCMKT | |
|---|---------|
| Redis - LPOP (Reqs/sec) | 1695509 |
| Standard Deviation | 1.8% |
| Redis - SADD (Reqs/sec) | 2118119 |
| Standard Deviation | 2.2% |
| Redis - LPUSH (Reqs/sec) | 1672723 |
| Standard Deviation | 1.3% |
| Redis - GET (Reqs/sec) | 2336750 |
| Standard Deviation | 0.8% |
| Redis - SET (Reqs/sec) | 1934711 |
| Standard Deviation | 1.2% |

Redis v6.0.9

Test: LPOP

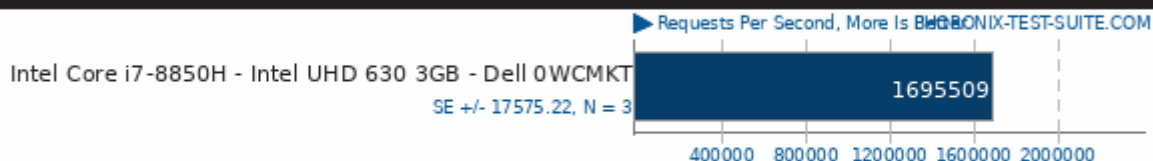


Phoronix Test Suite 9.0.1

1. (CXX) g++ options: -MM -MT -g3 -fvisibility=hidden -O3

Redis v6.0.9

Test: SADD

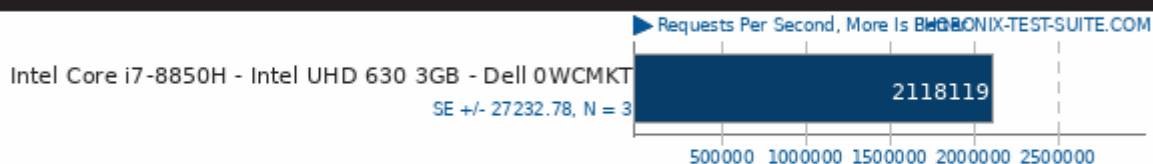

Phoronix Test Suite 9.0.1

1. (CXX) g++ options: -MM -MT -g3 -fvisibility=hidden -O3

Redis v6.0.9

Test: LPUSH



Phoronix Test Suite 9.0.1

1. (CXX) g++ options: -MM -MT -g3 -fvisibility=hidden -O3

Redis v6.0.9

Test: GET



Phoronix Test Suite 9.0.1

1. (CXX) g++ options: -MM -MT -g3 -fvisibility=hidden -O3

Redis v6.0.9

Test: SET

Requests Per Second, More Is Better PHORONIX-TEST-SUITE.COM

Intel Core i7-8850H - Intel UHD 630 3GB - Dell 0WCMKT

SE +/- 13358.04, N = 3

1934711

400000 800000 1200000 1600000 2000000

Phoronix Test Suite 9.0.1

1. (CXX) g++ options: -MM -MT -g3 -fvisibility=hidden -O3

This file was automatically generated via the Phoronix Test Suite benchmarking software on Saturday, 19 December 2020 23:35.