10/8/26

EXPERIMENT-8

CONFIGURATION OF WIRELESS LAN USING CISCO PACKET TRACER

AIM:

To configure a Wireless LAN using Cisco Packet Tracer by connecting three PCs to a Linksys wireless router, assigning static IP addresses, setting the SSID to MotherNetwork, & securing the network using a WEP key.

PROCEDURE:

1) Open Cisco Packet Tracer & place one Linksys wireless router & 3 PC's in the workspace.

2) Open the wireless router & select the Administration tab. Set the username & password to admin, then click save settings.

3) Select the Wireless tab & set the SSID to MotherNetwork.

4) Open Wireless tab & set the SSID to MotherNetwork, select WEP as the security mode, & set key1 to 0123456789. Click save settings.

5) Configure static IP addresses on all 3 PCs by selecting PC → Desktop → IP configuration → Static.

Device	IP addresses	Subnet Mask	Default Gateway
Router	192.168.0.1	255.255.255.0	—
PC0	192.168.0.2	255.255.255.0	192.168.0.1
PC1	192.168.0.3	255.255.255.0	192.168.0.1
PC2	192.168.0.4	255.255.255.0	192.168.0.1

6) On each PC, select Desktop → PC Wireless → Connect & click Refresh to find the MotherNetwork SSID.

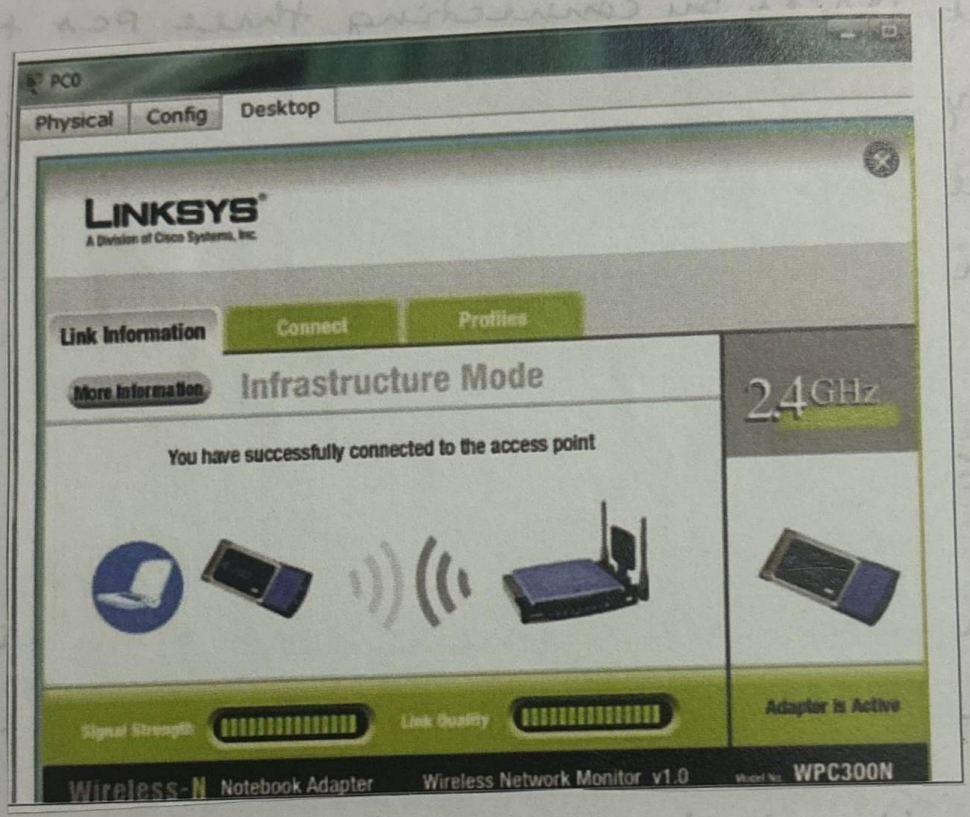
7) Select MotherNetwork, click Connect, enter the WEP key 0123456789 & connect to the wireless router.

8) Repeat the same procedure for PC1 & PC2.

9) Verify connectivity by open Command Prompt on a PC & using the ping command to test communication with the other PCs.

RESULT:

Thus, the Wireless LAN was successfully configured in Cisco Packet Tracer. Three PCs were assigned static IP addresses & connected to the Linksys wireless router using the SSID MotherNetwork & the configured WEP key.


PC0
Physical
Config
Desktop
LINKSYS
A Division of Cisco Systems, Inc.
Link Information
Connect
Profiles
More Information
Infrastructure Mode
2.4GHz
You have successfully connected to the access point
Signal Strength
Link Quality
Adapter is Active
Wireless-N Notebook Adapter
Wireless Network Monitor v1.0
WPC300N