
UART RX testbench - EPWave waveform (0 to 20,000,000 ps)

Reconstructed from EPWave screenshot; tb and dut signals. Parameters: BIT_PERIOD=a0, CLKS_PER_BIT=10 (hex/decimal as shown in viewer).



Zoom: first frame (0 to 1,800,000 ps)

Frame 0xA5 sent LSB-first on rx; rx_data = a5 and rx_done pulses at the end of the stop bit.

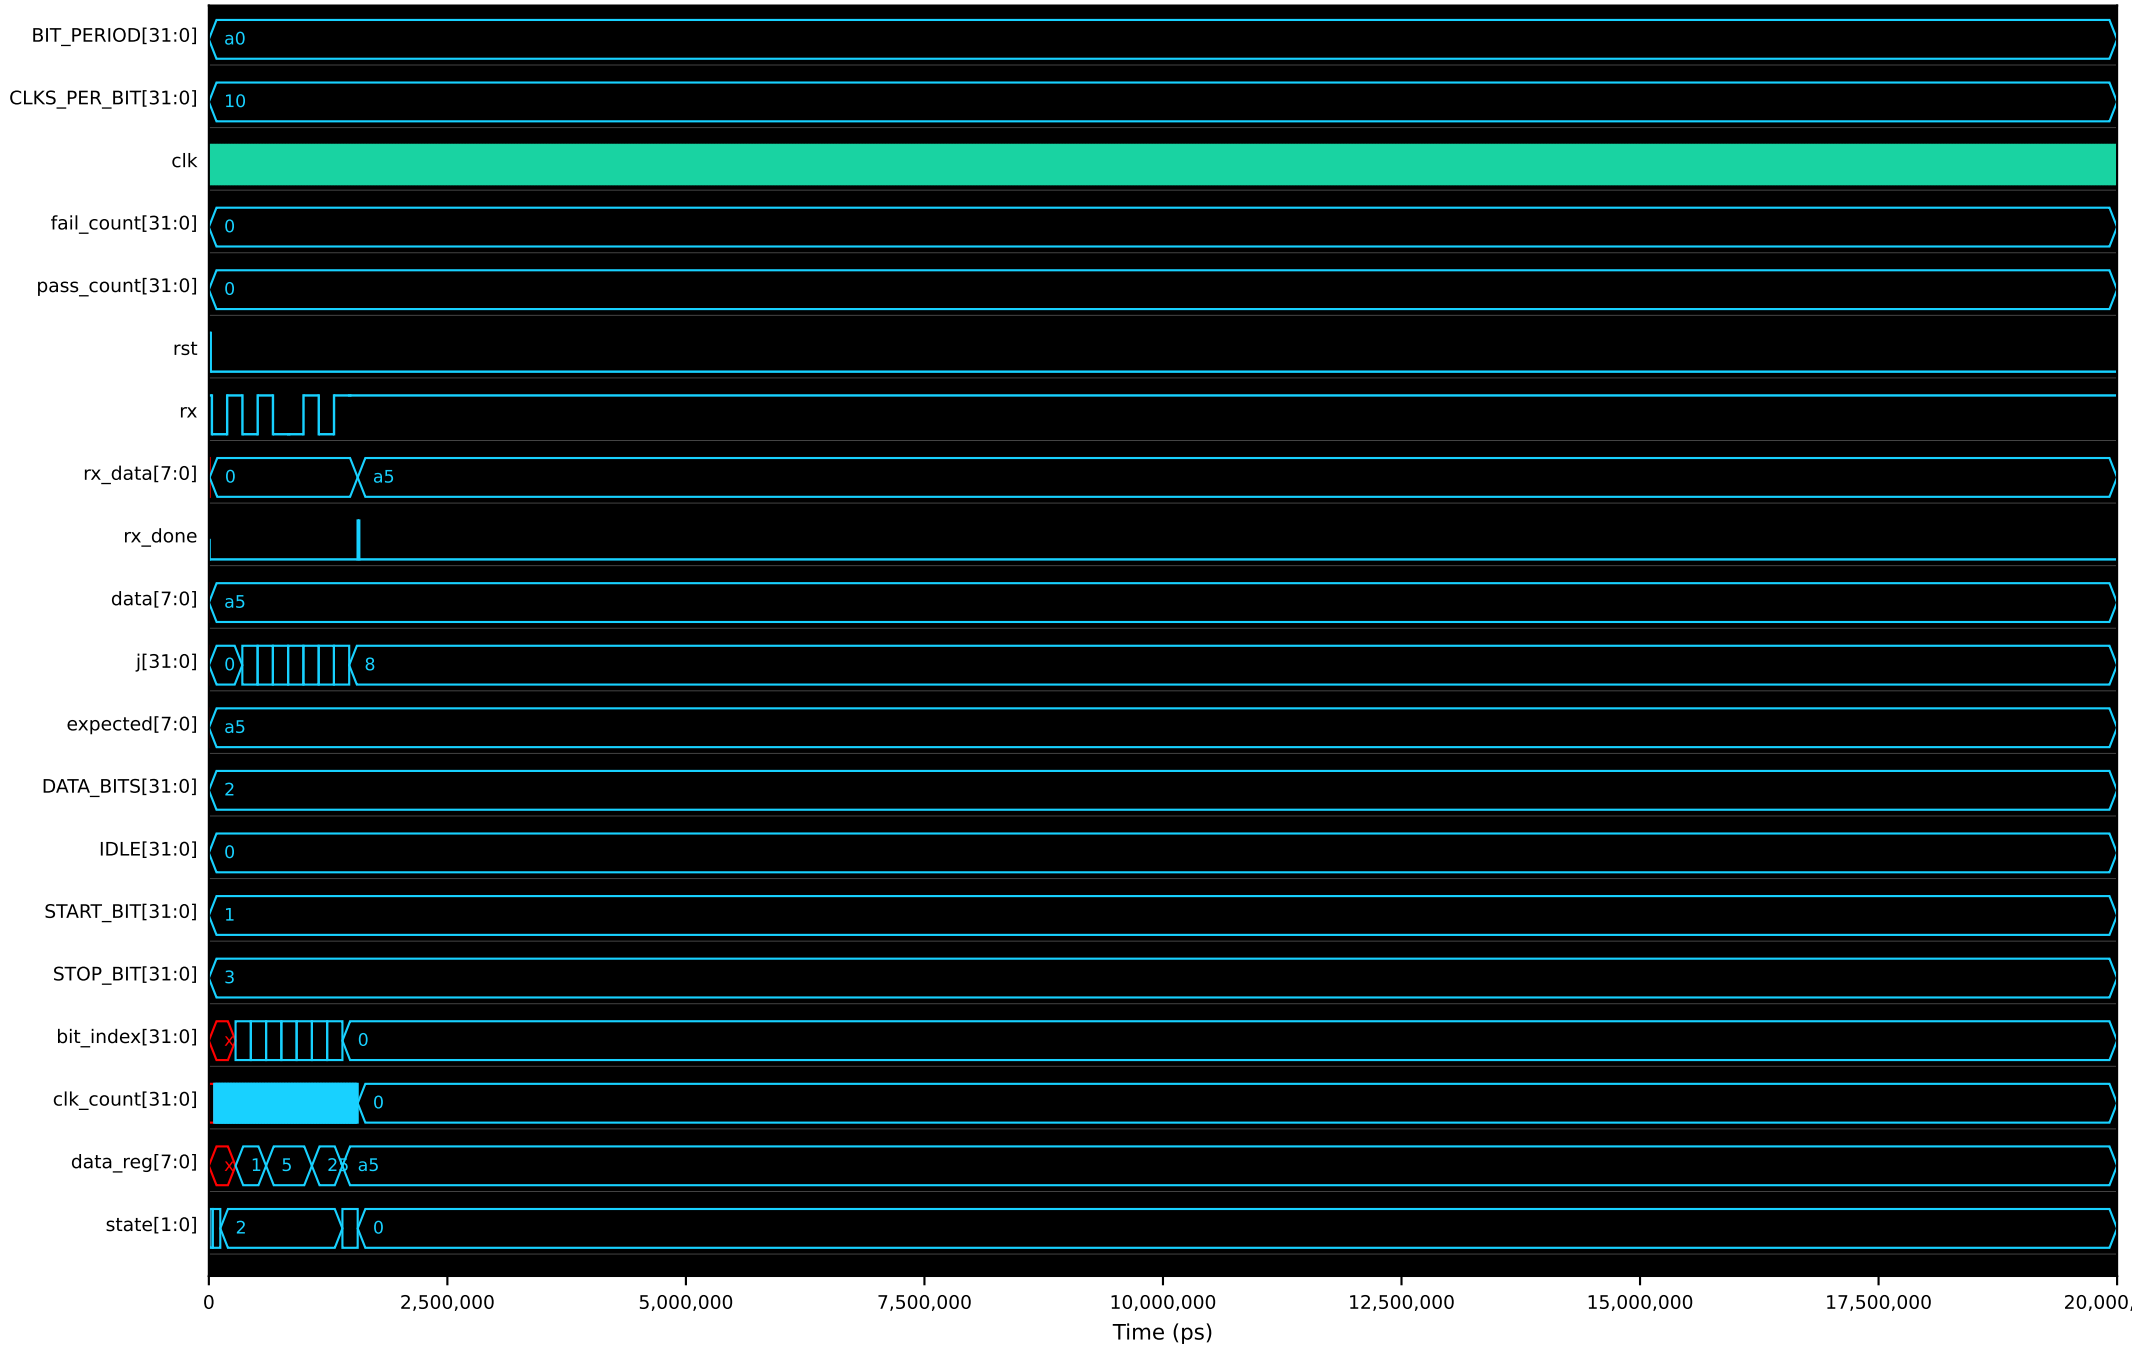