


Chapter 10: Mass-Storage Systems

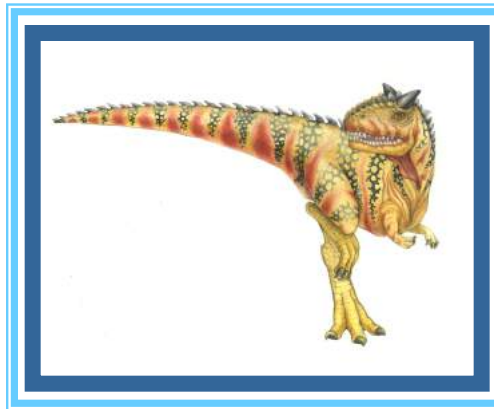

CMSC421 Update

■ Completed

- 18 Class Periods
- Mid Term Exam
- Project 0, 1
- Homework 0

■ Future

- 11 Class Periods
- Project 2
- Homework 1,2
- Final Exam
- Topics:
 - ▶ Mass Storage
 - ▶ File System Interface, Implementation
 - ▶ Virtualization, Protection and Security

But First...

■ New Apple Product

- https://www.youtube.com/watch?v=W63_N63Qy-w
- <https://www.youtube.com/watch?v=6PAxmM6YbtY>

■ <http://www.apple.com/newsroom/2016/11/designed-by-apple-in-california-chronicles-20-years-of-apple-design.html>

■ Ifixit

- <https://www.ifixit.com>

■ Apple File System

- <https://developer.apple.com/videos/play/wwdc2017/715/>

Chapter 10: Mass-Storage Systems

- Overview of Mass Storage Structure
- Disk Structure
- Disk Attachment
- Disk Scheduling
- Disk Management
- Swap-Space Management
- RAID Structure
- Stable-Storage Implementation


Objectives

- To describe the physical structure of secondary storage devices and its effects on the uses of the devices
- To explain the performance characteristics of mass-storage devices
- To evaluate disk scheduling algorithms
- To discuss operating-system services provided for mass storage, including RAID

Overview of Mass Storage Structure

- **Magnetic disks** provide bulk of secondary storage of modern computers
 - Drives rotate at 60 to 250 times per second. What about today?
 - **Transfer rate** is rate at which data flow between drive and computer
 - **Positioning time** (**random-access time**) is time to move disk arm to desired cylinder (**seek time**) + time for desired sector to rotate under the disk head (**rotational latency**)
 - **Head crash** results from disk head making contact with the disk surface -- That's bad
- Disk drive can be removable
- Drive attached to computer via **I/O bus**
 - Busses vary, including **EIDE**, **ATA**, **SATA**, **USB**, **Fibre Channel**, **SCSI**, **SAS**, **Firewire**
 - **Host controller** in computer uses bus to talk to **disk controller** built into drive or storage array

Moving-head Disk Mechanism

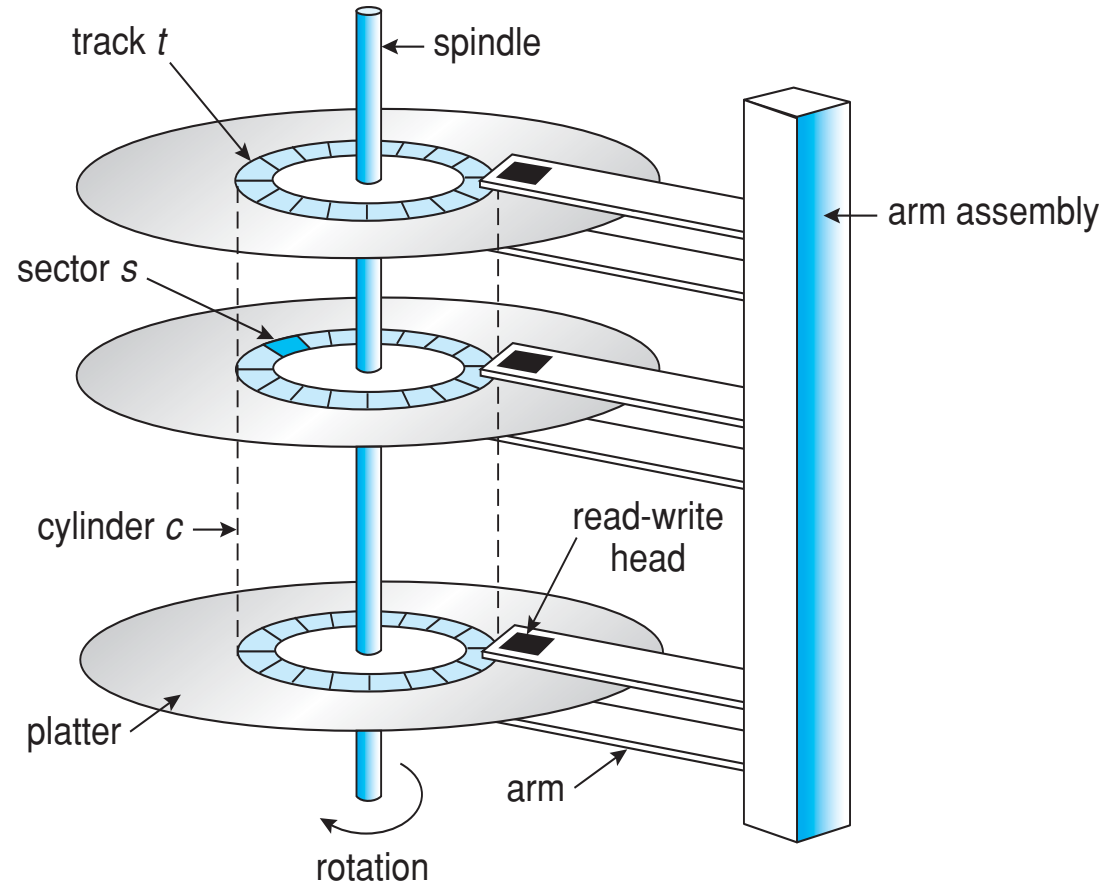

Motherboard

■ IBM PC Motherboard

- https://upload.wikimedia.org/wikipedia/commons/5/57/IBM_PC_Motherboard_%281981%29.jpg

■ iPhone

- <http://www.cellular-news.com/story/60650.php>

The First Commercial Disk Drive



1956
IBM RAMDAC computer
included the IBM Model
350 disk storage system

5M (7 bit) characters
50 x 24" platters
Access time = < 1 second

Disk Drive



SSD



No moving parts.

Hard Disks

- Platters range from .85” to 14” (historically)
 - Commonly 3.5”, 2.5”, and 1.8”
- Range from 30GB to 3TB per drive
- Performance
 - Transfer Rate – theoretical – 6 Gb/sec
 - Effective Transfer Rate – real – 1Gb/sec
 - Seek time from 3ms to 12ms – 9ms common for desktop drives
 - Average seek time measured or calculated based on 1/3 of tracks
 - Latency based on spindle speed
 - ▶ $1 / (\text{RPM} / 60) = 60 / \text{RPM}$
 - Average latency = $\frac{1}{2}$ latency

Spindle [rpm]	Average latency [ms]
4200	7.14
5400	5.56
7200	4.17
10000	3
15000	2

(From Wikipedia)

Hard Disk Performance

- **Access Latency** = **Average access time** = average seek time + average latency
 - For fastest disk $3\text{ms} + 2\text{ms} = 5\text{ms}$
 - For slow disk $9\text{ms} + 5.56\text{ms} = 14.56\text{ms}$
- Average I/O time = average access time (amount to transfer / transfer rate) + controller overhead
- For example to transfer a 4KB block on a 7200 RPM disk with a 5ms average seek time, 1Gb/sec transfer rate with a .1ms controller overhead =
 - $5\text{ms} + 4.17\text{ms} + 0.1\text{ms} + \text{transfer time} =$
 - $\text{Transfer time} = 4\text{KB} / 1\text{Gb/s} * 8\text{Gb} / \text{GB} * 1\text{GB} / 1024^2\text{KB} = 32 / (1024^2) = 0.031 \text{ ms}$
 - Average I/O time for 4KB block = $9.27\text{ms} + .031\text{ms} = 9.301\text{ms}$

MISC

■ IBM Tilt Card

- IBM 3330 Disk Drive – 100-200MB
- https://www-03.ibm.com/ibm/history/exhibits/storage/storage_3330.html



Spinrite

- <https://www.grc.com/sroverview.htm>
- <https://www.grc.com/sr/spinrite.htm>

Solid-State Disks

- Nonvolatile memory used like a hard drive
 - Many technology variations
- Can be more reliable than HDDs
- More expensive per MB
- Maybe have shorter life span
- Less capacity
- But much faster
- Busses can be too slow -> connect directly to PCI for example
- No moving parts, so no seek time or rotational latency
- Kernel driver make it appear to be a real spinning disk
- Trim

Magnetic Tape

- Was early secondary-storage medium
 - Evolved from open spools to cartridges
- Relatively permanent and holds large quantities of data
- Access time slow
- ***Random access*** ~1000 times slower than disk
- Mainly used for backup, storage of infrequently-used data, transfer medium between systems
- Kept in spool and wound or rewound past read-write head
- Once data under head, transfer rates comparable to disk
 - 140MB/sec and greater
- 200GB to 1.5TB typical storage
- Common technologies are LTO-{3,4,5} and T10000

Tape is sort of still valid


- Amazon Glacier

- <https://aws.amazon.com/glacier/>

- Automated Tape Library

- <https://www.youtube.com/watch?v=9fTJkVgRvpw>

PNNL

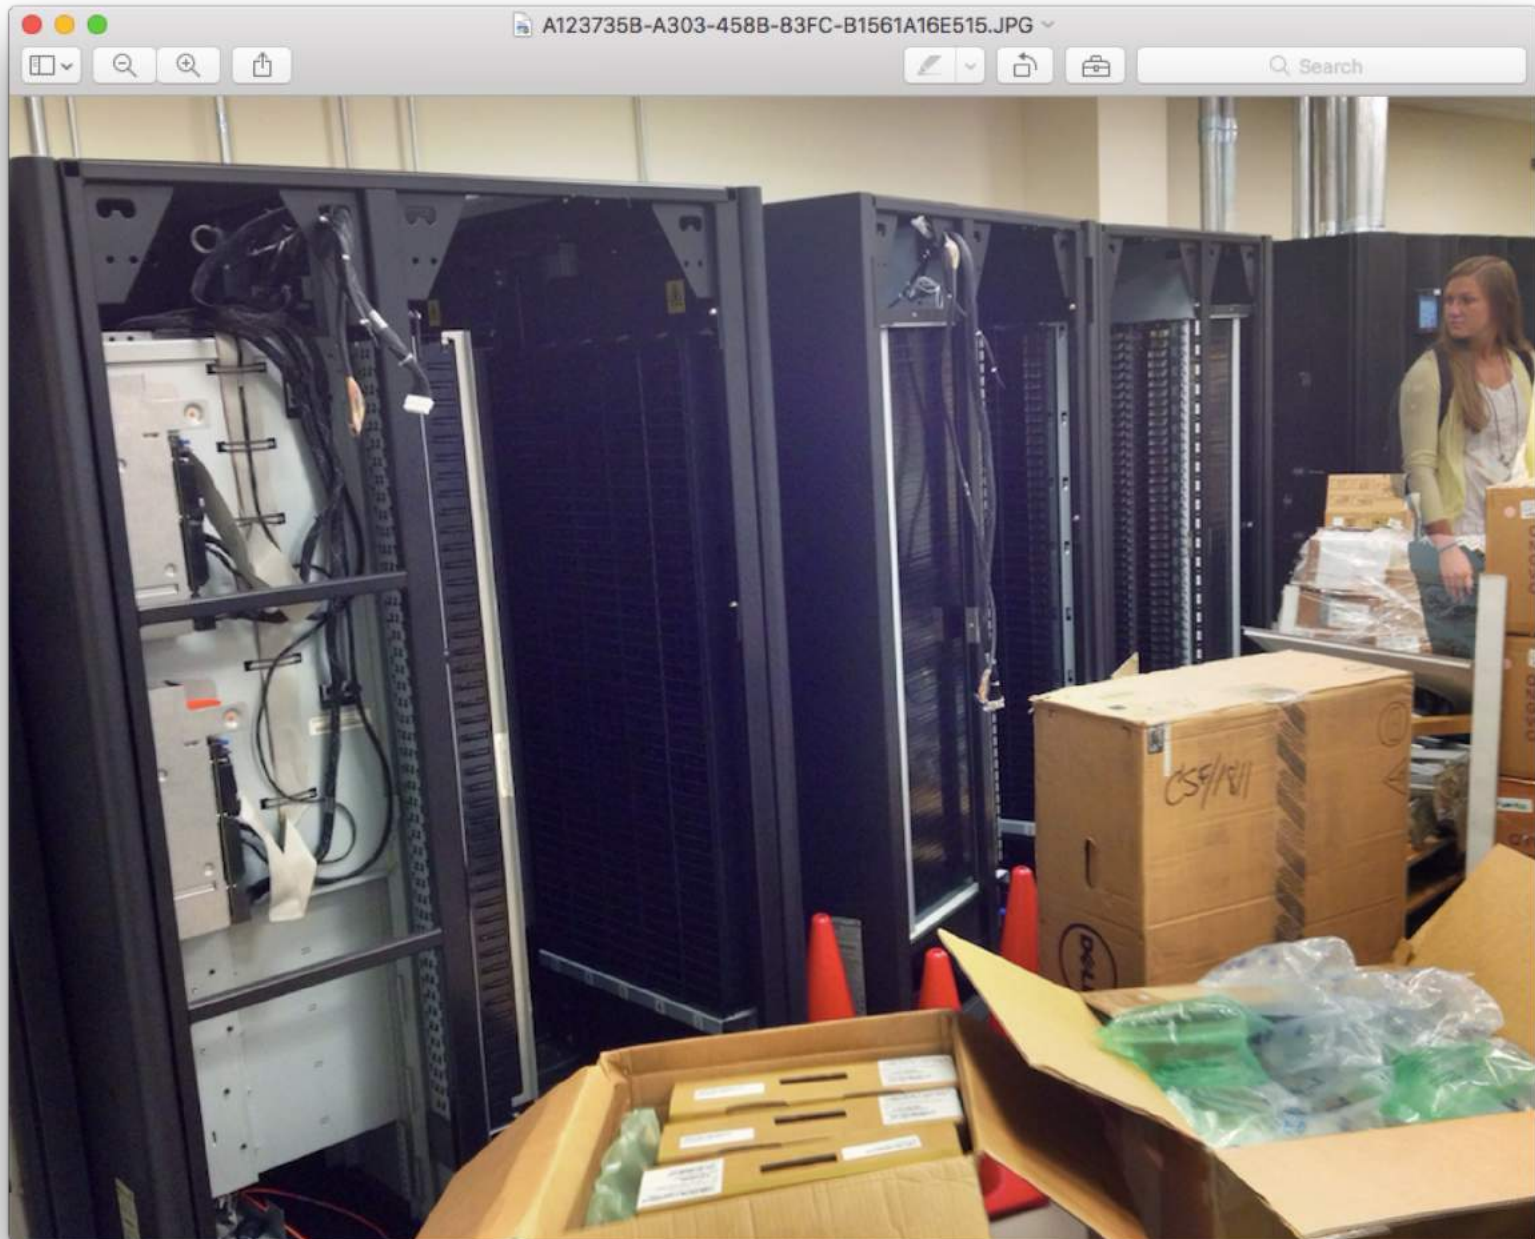

Disk Structure

- Disk drives are addressed as large 1-dimensional arrays of **logical blocks**, where the logical block is the smallest unit of transfer
 - Low-level formatting creates **logical blocks** on physical media
- The 1-dimensional array of logical blocks is mapped into the sectors of the disk sequentially
 - Sector 0 is the first sector of the first track on the outermost cylinder. If this is a boot disk, **boot sector** is here.
 - **Mapping** proceeds in order through that track, then the rest of the tracks in that cylinder, and then through the rest of the cylinders from outermost to innermost
 - Logical to physical address should be easy
 - ▶ Except for bad sectors
 - ▶ Non-constant # of sectors per track via constant angular velocity

Disk Attachment

- Host-attached storage accessed through I/O ports talking to I/O busses
- SCSI itself is a bus, up to 16 devices on one cable, **SCSI initiator** requests operation and **SCSI targets** perform tasks
 - Each target can have up to 8 **logical units** (disks attached to device controller)
- FC is high-speed serial architecture
 - Can be switched fabric with 24-bit address space – the basis of **storage area networks (SANs)** in which many hosts attach to many storage units
- I/O directed to bus ID, device ID, logical unit (LUN)

Storage Array

- Can just attach disks, or arrays of disks
- Storage Array has controller(s), provides features to attached host(s)
 - Ports to connect hosts to array
 - Memory, controlling software (sometimes NVRAM, etc)
 - A few to thousands of disks
 - RAID, hot spares, hot swap (discussed later)
 - Shared storage -> more efficiency
 - Features found in some file systems
 - ▶ Snapshots, clones, thin provisioning, replication, deduplication, etc


Storage Array



This file is licensed under the [Creative Commons Attribution-Share Alike 3.0 Unported](#) license.

Network-Attached Storage

- Network-attached storage (**NAS**) is storage made available over a network rather than over a local connection (such as a bus)
 - Remotely attaching to file systems
- NFS and CIFS are common protocols
- Implemented via remote procedure calls (RPCs) between host and storage over typically TCP or UDP on IP network
- **iSCSI** protocol uses IP network to carry the SCSI protocol
 - Remotely attaching to devices (blocks)

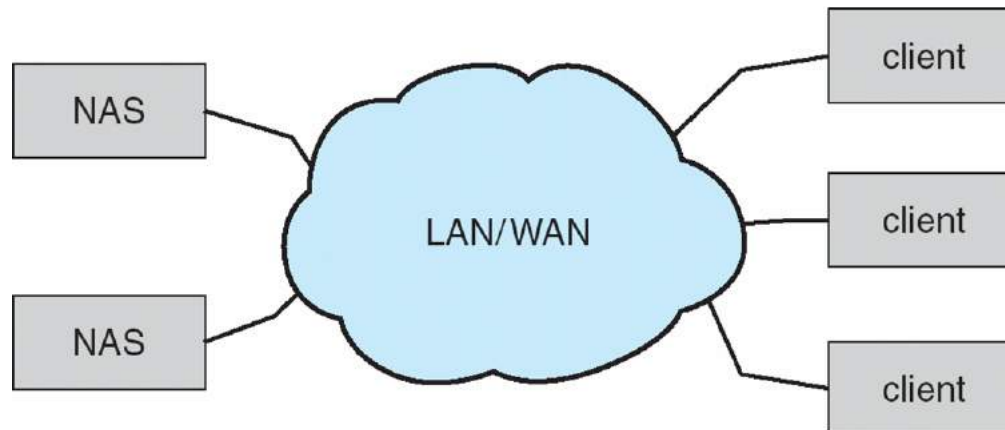


Example of NAS



Storage Area Network

- Common in large storage environments. Fiber required.
- Multiple hosts attached to multiple storage arrays - flexible

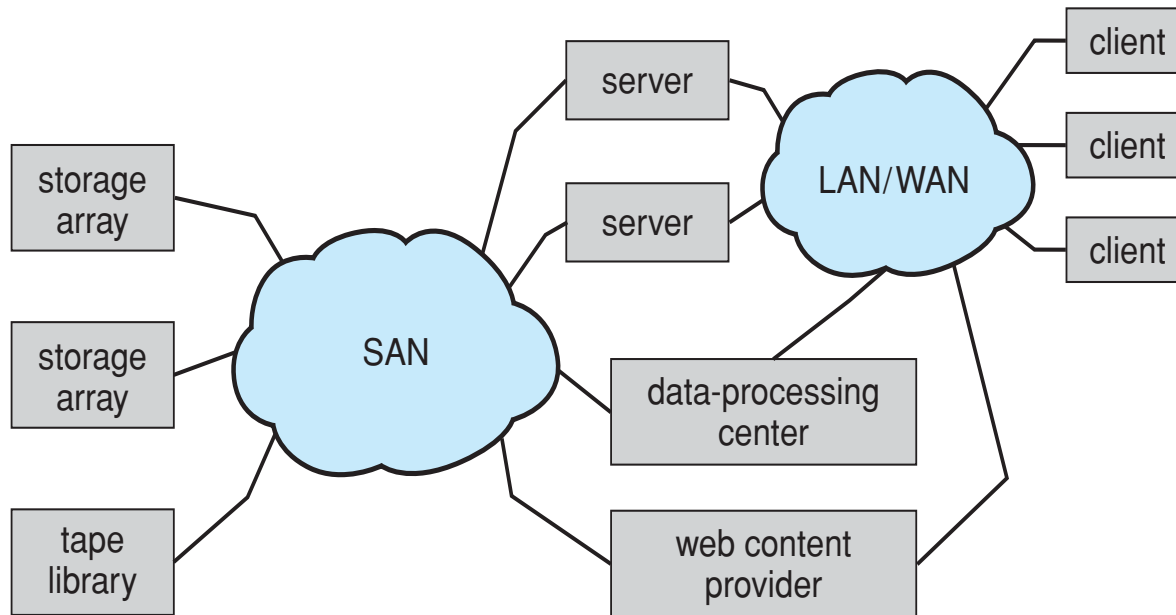

Storage Area Network (Cont.)

- SAN is one or more storage arrays
 - Connected to one or more Fibre Channel switches
- Hosts also attach to the switches
- Storage made available via **LUN Masking** from specific arrays to specific servers
- Easy to add or remove storage, add new host and allocate it storage
 - Over low-latency Fibre Channel fabric
- Why have separate storage networks and communications networks?
 - Consider iSCSI, FCOE

Cloud Storage

- Amazon Cloud Storage
 - <https://aws.amazon.com>
- Microsoft Cloud Storage
 - <https://azure.microsoft.com/en-us/>
- Google Cloud Storage
 - <https://cloud.google.com/storage/>
- Rackspace
 - <https://www.rackspace.com/en-us>

Disk Scheduling

- The operating system is responsible for using hardware efficiently — for the disk drives, this means having a fast access time and disk bandwidth
- Minimize seek time
- Seek time \approx seek distance
- Disk **bandwidth** is the total number of bytes transferred, divided by the total time between the first request for service and the completion of the last transfer
- We are assuming no priority

Disk Scheduling (Cont.)

- There are many sources of disk I/O request
 - OS
 - System processes
 - Users processes
- I/O request includes input or output mode, disk address, memory address, number of sectors to transfer
- OS maintains queue of requests, per disk or device
- Idle disk can immediately work on I/O request, busy disk means work must queue
 - Optimization algorithms only make sense when a queue exists

Disk Scheduling (Cont.)

- Note that drive controllers have small buffers and can manage a queue of I/O requests (of varying “depth”)
- Several algorithms exist to schedule the servicing of disk I/O requests
- The analysis is true for one or many platters
- There is a queue of requests existing.
- Each request has the same priority.
- We illustrate scheduling algorithms with a request queue (0-199)

98, 183, 37, 122, 14, 124, 65, 67


Head pointer 53

FCFS

Illustration shows total head movement of 640 cylinders


queue = 98, 183, 37, 122, 14, 124, 65, 67

head starts at 53

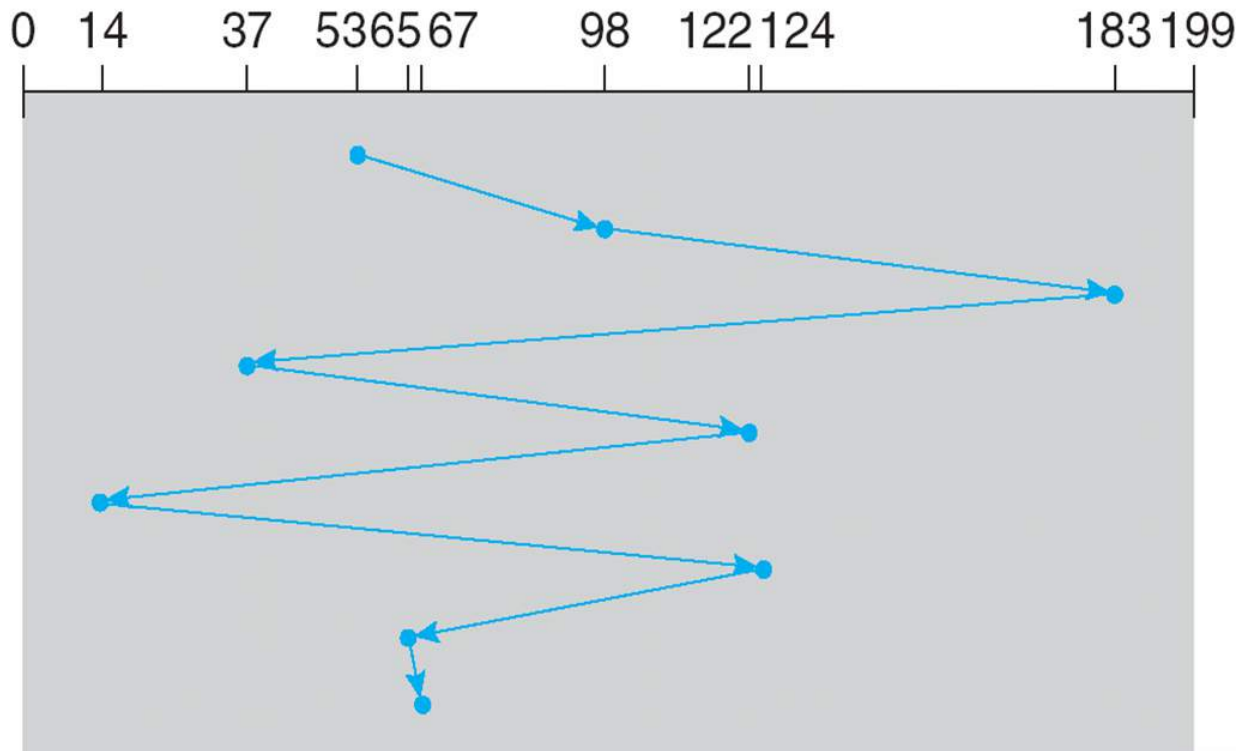

SSTF

- **Shortest Seek Time First** selects the request with the minimum seek time (closest, plus or minus) from the current head position
- SSTF scheduling is a form of SJF scheduling; may cause starvation of some requests
- Illustration shows total head movement of 236 cylinders

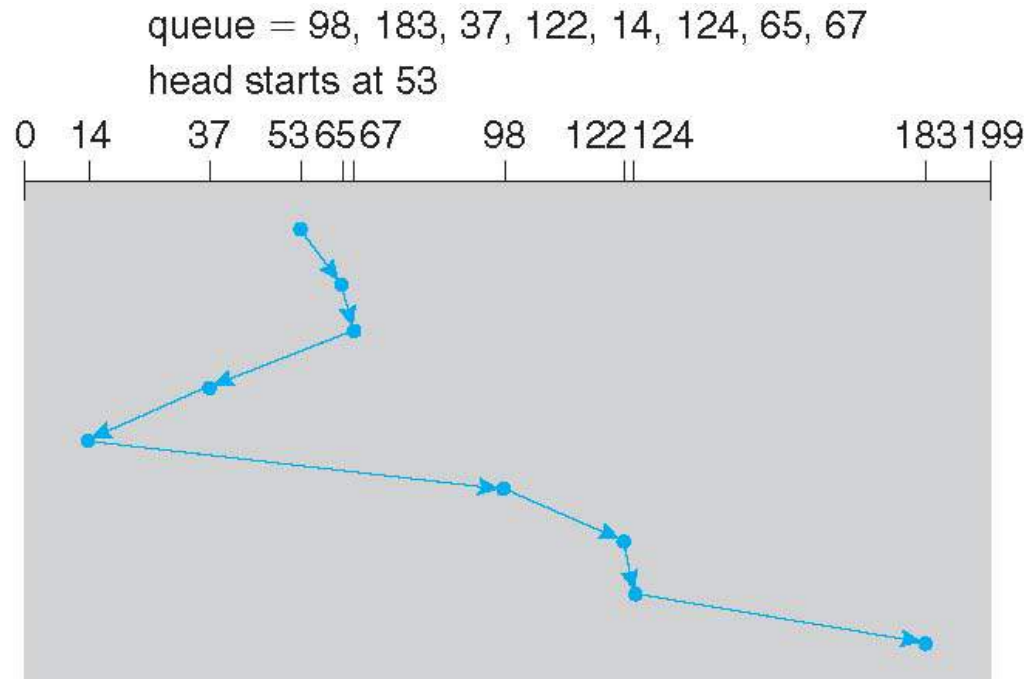


SCAN

- The disk arm starts at one end of the disk, and moves toward the other end, servicing requests until it gets to the other end of the disk, where the head movement is reversed and servicing continues.
- **SCAN algorithm** Sometimes called the **elevator algorithm**
- Illustration shows total head movement of 208 cylinders
- But note that if requests are uniformly dense, largest density at other end of disk and those wait the longest.
- Will performance matter if we "go to the right or left"? Let us do both.

SCAN (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67

head starts at 53

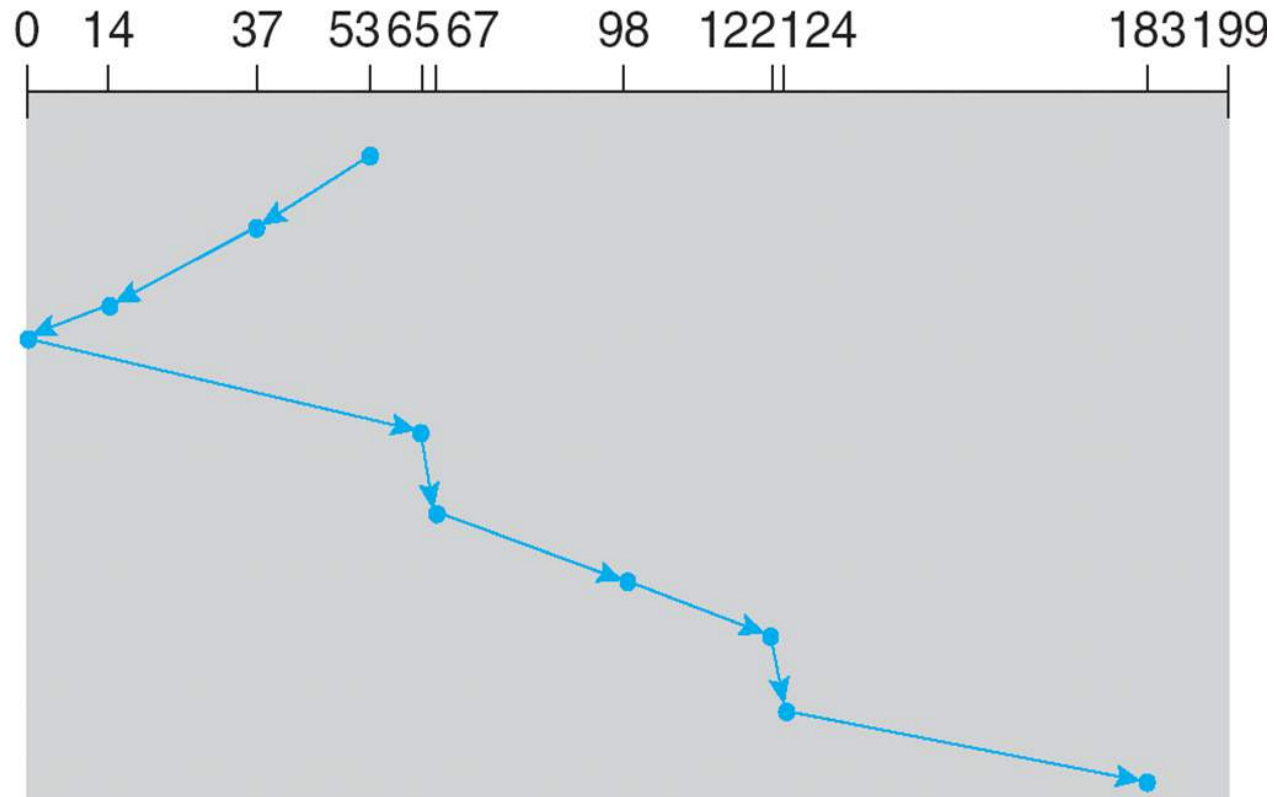


C-SCAN

- **Circular Scan** – (Wrap Around Scan) Provides a more uniform wait time than SCAN
- The head moves from one end of the disk to the other, servicing requests as it goes
 - When it reaches the other end, however, **it immediately returns to the beginning of the disk, without servicing any requests on the return trip**
- Treats the cylinders as a circular list that wraps around from the last cylinder to the first one
- Total number of cylinders?

C-SCAN (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67

head starts at 53

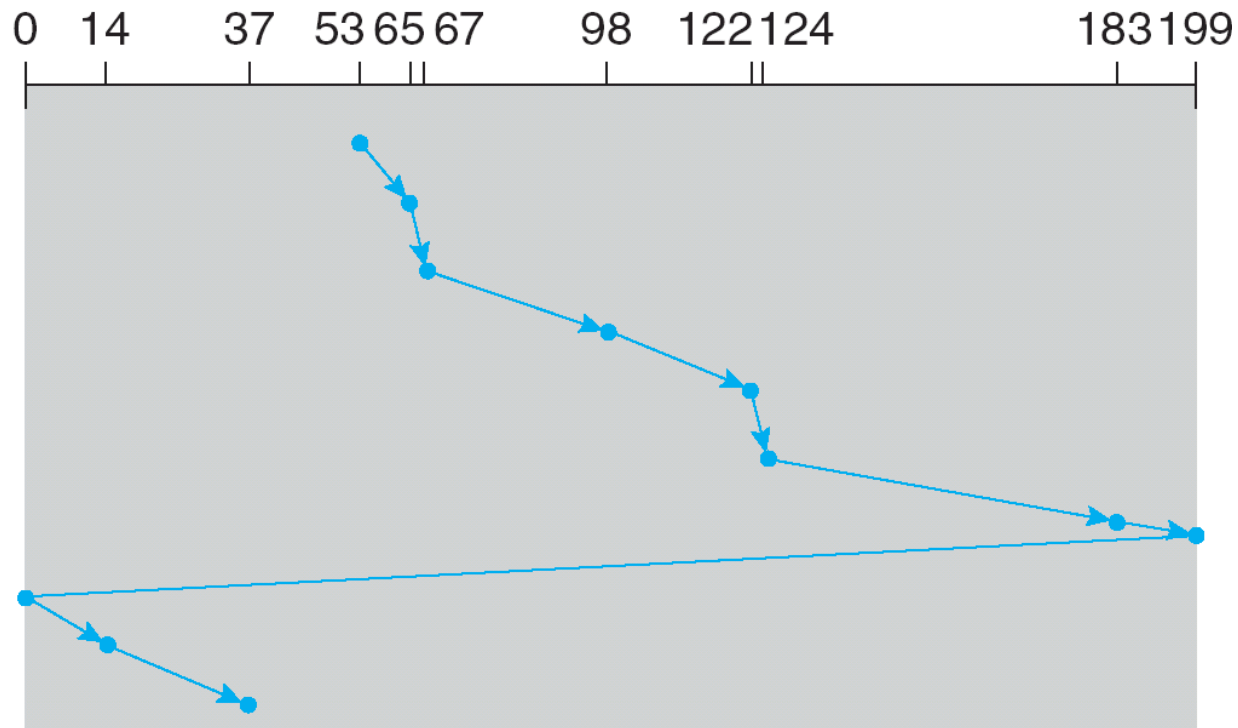


C-LOOK

- **Circular LOOK** - a version of SCAN, C-LOOK a version of C-SCAN
- Arm only goes as far as the last request in each direction, then reverses direction immediately, without first going all the way to the end of the disk
- Total number of cylinders?

C-LOOK (Cont.)

queue = 98, 183, 37, 122, 14, 124, 65, 67

head starts at 53

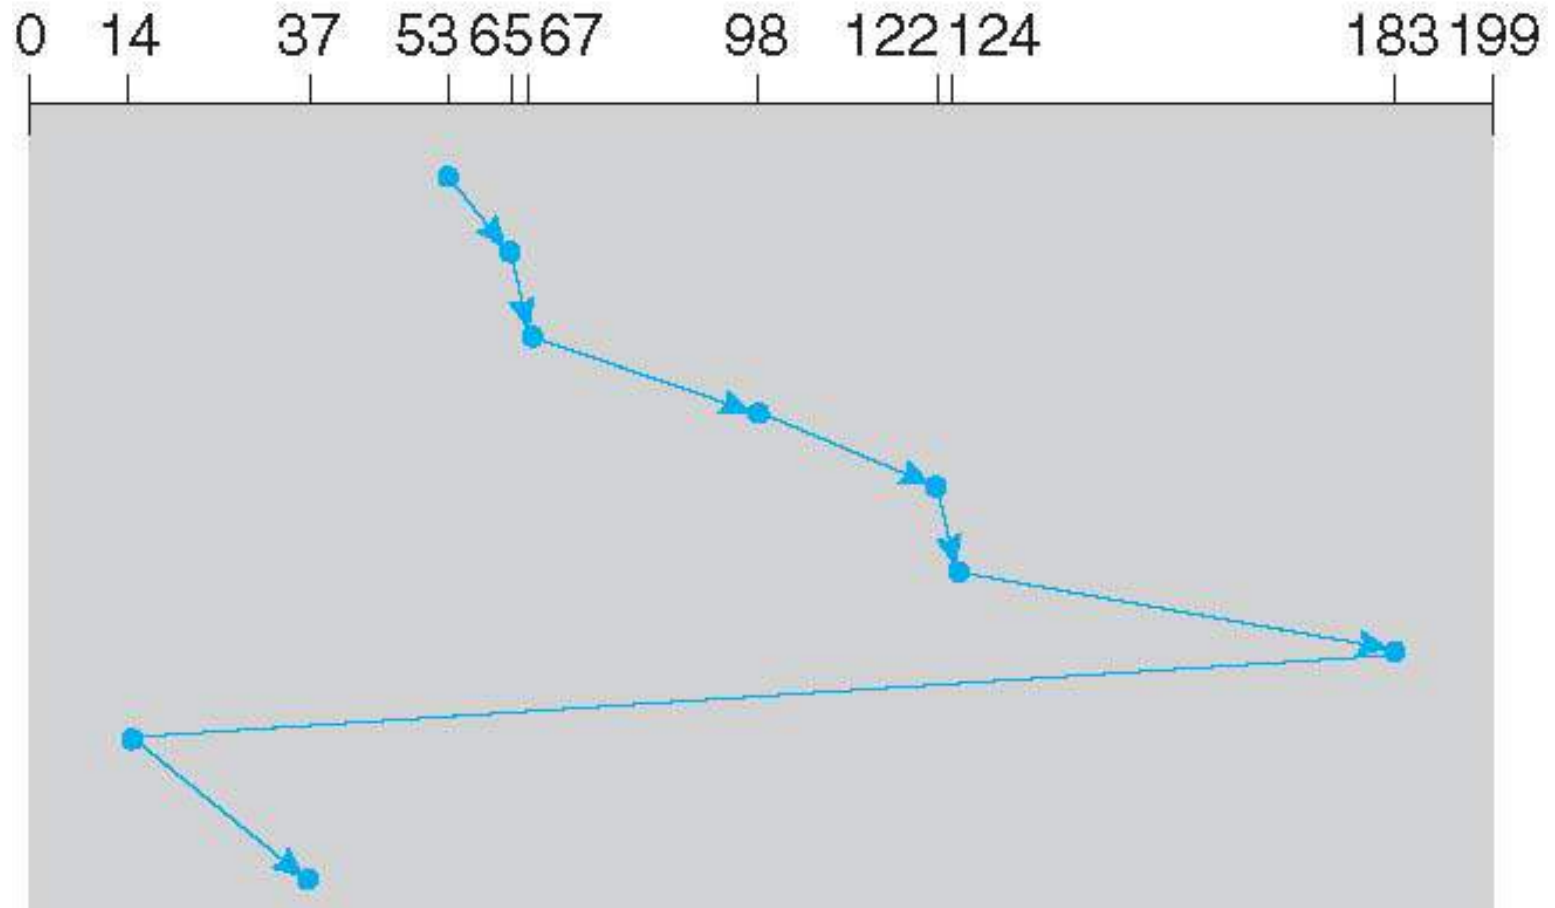

Selecting a Disk-Scheduling Algorithm

- SSTF is common and has a natural appeal
- SCAN and C-SCAN perform better for systems that place a heavy load on the disk
 - Less starvation
- Performance depends on the number and types of requests
- Requests for disk service can be influenced by the file-allocation method
 - And metadata layout

Selecting a Disk-Scheduling Algorithm

- The disk-scheduling algorithm should be written as a separate module of the operating system, allowing it to be replaced with a different algorithm if necessary
- Either SSTF or LOOK is a reasonable choice for the default algorithm
- What about rotational latency?
 - Difficult for OS to calculate
- How does disk-based queueing effect OS queue ordering efforts?

Where does this fit in Windows?

https://upload.wikimedia.org/wikipedia/commons/5/5d/Windows_2000_architecture.svg


Disk Management

- **Low-level formatting**, or **physical formatting** — Dividing a disk into sectors that the disk controller can read and write
 - Each sector can hold header information, plus data, plus error correction code (**ECC**)
 - Usually 512 bytes of data but can be selectable
 - Fdisk and parted
- To use a disk to hold files, the operating system still needs to record its own data structures on the disk
 - **Partition** the disk into one or more groups of cylinders, each treated as a logical disk
 - **Logical formatting** or “making a file system”
 - To increase efficiency most file systems group blocks into **clusters**
 - ▶ Disk I/O done in blocks
 - ▶ File I/O done in clusters

Disk Management (Cont.)

- Raw disk access for apps that want to do their own block management, keep OS out of the way (databases for example)
- SWAP has its own specially formatted file systems. It is formatted to bring a lot of data in all at once.
- Boot block initializes system
 - The bootstrap is stored in ROM
 - **Bootstrap loader** program stored in boot blocks of boot partition
- Methods such as **sector sparing** used to handle bad blocks


Booting from a Disk in Windows

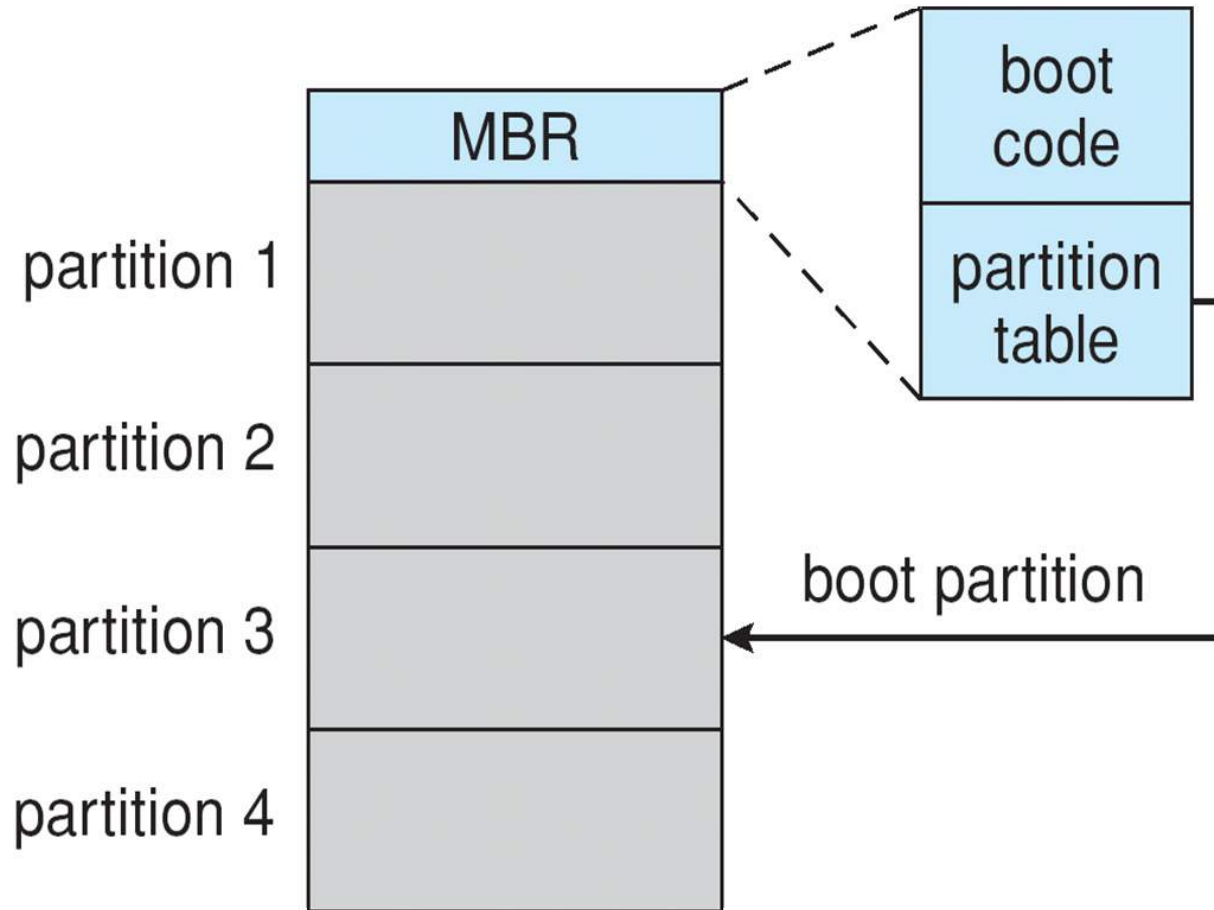

Swap-Space Management

- Swap-space — Virtual memory uses disk space as an extension of main memory
 - Less common now due to memory capacity increases
- Swap-space can be carved out of the normal file system, or, more commonly, it can be in a separate disk partition (raw)
- Swap-space management
 - 4.3BSD allocates swap space when process starts; holds text segment (the program) and data segment
 - Kernel uses **swap maps** to track swap-space use
 - Solaris 2 allocates swap space only when a dirty page is forced out of physical memory, not when the virtual memory page is first created
 - ▶ File data written to swap space until write to file system requested
 - ▶ Other dirty pages go to swap space due to no other home
 - ▶ Text segment pages thrown out and reread from the file system as needed
- What if a system runs out of swap space?
- Some systems allow multiple swap spaces

Data Structures for Swapping on Linux Systems

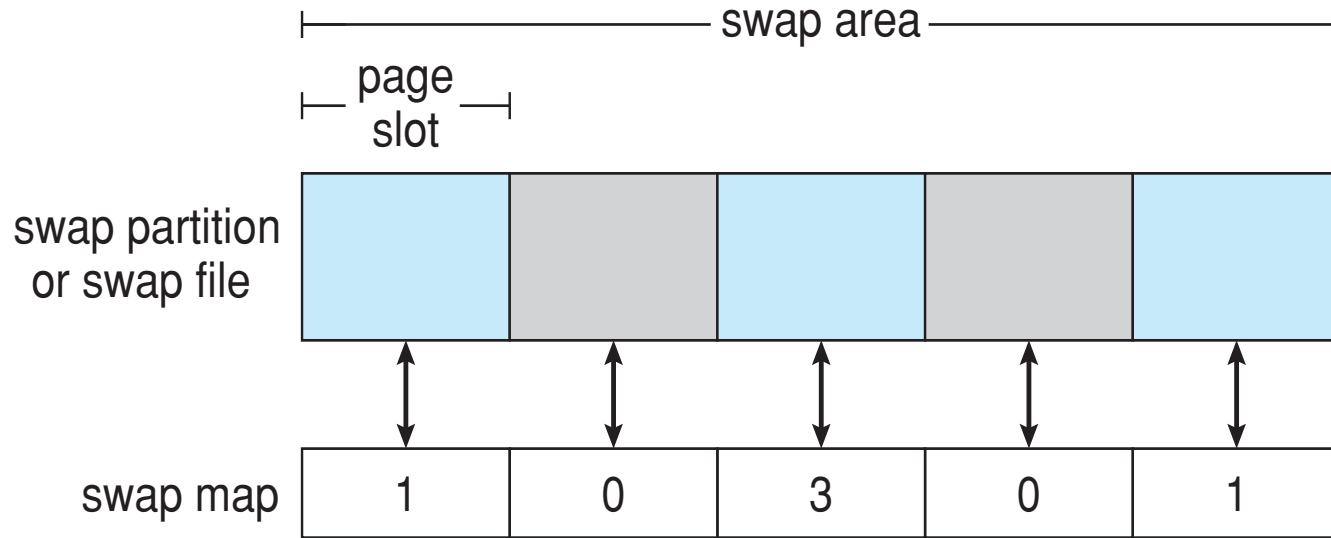


RAID Structure

- RAID – redundant array of inexpensive disks
 - multiple disk drives provides reliability via **redundancy**
- Increases the **mean time to failure**
- **Mean time to repair** – exposure time when another failure could cause data loss
- **Mean time to data loss** based on above factors
- If mirrored disks fail independently, consider disk with 1300,000 mean time to failure and 10 hour mean time to repair
 - Mean time to data loss is $100,000^2 / (2 * 10) = 500 * 10^6$ hours, or 57,000 years!
- Frequently combined with **NVRAM** to improve write performance
- Several improvements in disk-use techniques involve the use of multiple disks working cooperatively

RAID (Cont.)

- Disk **striping** uses a group of disks as one storage unit
- RAID is arranged into six different levels
- RAID schemes improve performance and improve the reliability of the storage system by storing redundant data
 - **Mirroring** or **shadowing** (**RAID 1**) keeps duplicate of each disk
 - Striped mirrors (**RAID 1+0**) or mirrored stripes (**RAID 0+1**) provides high performance and high reliability
 - **Block interleaved parity** (**RAID 4, 5, 6**) uses much less redundancy
- RAID within a storage array can still fail if the array fails, so automatic **replication** of the data between arrays is common
- Frequently, a small number of **hot-spare** disks are left unallocated, automatically replacing a failed disk and having data rebuilt onto them


RAID Levels



(a) RAID 0: non-redundant striping.




(b) RAID 1: mirrored disks.



(c) RAID 2: memory-style error-correcting codes.



(d) RAID 3: bit-interleaved parity.



(e) RAID 4: block-interleaved parity.



(f) RAID 5: block-interleaved distributed parity.




(g) RAID 6: P + Q redundancy.


Can this stripe? Mirror?



RAID (0 + 1) and (1 + 0)

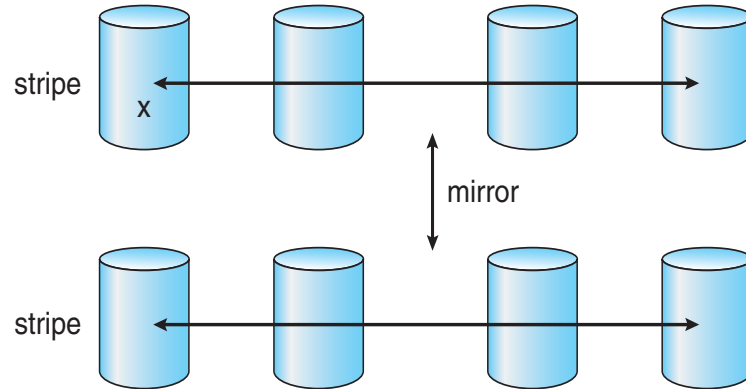

a) RAID 0 + 1 with a single disk failure.

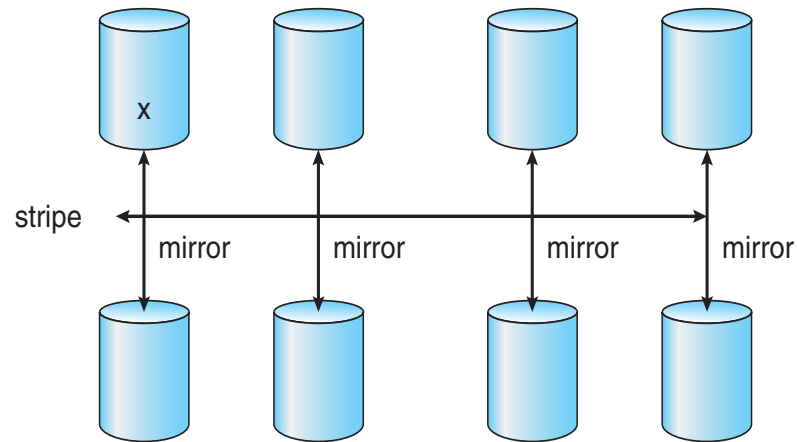

b) RAID 1 + 0 with a single disk failure.

Other Features

- Regardless of where RAID implemented, other useful features can be added
- **Snapshot** is a view of file system before a set of changes take place (i.e. at a point in time)
 - More in Ch 12
- Replication is automatic duplication of writes between separate sites
 - For redundancy and disaster recovery
 - Can be synchronous or asynchronous
- Hot spare disk is unused, automatically used by RAID production if a disk fails to replace the failed disk and rebuild the RAID set if possible
 - Decreases mean time to repair

End of Chapter 10

