

HEALTHCARE IAM HOME LAB • CLOUD SECURITY CAPSTONE

Cloud Architecture Design & Security Patterns

Azure Three-Tier VNet Build — HVMC Patient Portal Environment

PROJECT

AccessGuard Health

PREPARED BY

Sabitha S Karanavar

DATE

October 6, 2026

PLATFORM

Microsoft Azure



Contents

1. Rubric Requirement Mapping	3
2. Three-Tier Architecture Diagram	4
3. Hands-On VNet Configuration — Subnet Segmentation	5
4. Supporting Infrastructure — Load Balancer & NAT Gateway	9
5. Security Design Pattern 1: Network Security Groups (Zero-Trust Segmentation)	13
6. Security Design Pattern 2: Bastion Host	17
7. Configuration Notes & Reconciliation	19

1. Rubric Requirement Mapping

This document provides complete, hands-on documentation for the **Cloud Architecture Design & Security Patterns** rubric criterion, built live in the Microsoft Azure Portal under resource group `HVMC-CloudSecurity-RG` (East US), representing the HVMC Patient Portal environment for the AccessGuard Health project.

Rubric Requirement	Evidence Provided	Status
Three-tier architecture diagram showing VPC/VNet design with public/private subnets, security groups, and NACLs, built using diagramming tools	Section 2 — architecture diagram depicting the Web / App / Data tier layout, Load Balancer, NAT Gateway, and Bastion subnet	✓ Complete
Hands-on VPC/VNet configuration in AWS, Azure, or GCP with subnet segmentation and security group rules	Sections 3–5 — live Azure Portal build of <code>HVMC-Prod-VNet</code> , four subnets, and three Network Security Groups with least-privilege rules	✓ Complete
Security design pattern 1: Bastion Host, with documented configuration steps and screenshots	Section 6 — Azure Bastion deployment (<code>HVMC-Bastion</code>) into a dedicated <code>AzureBastionSubnet</code> , end to end through deployment completion	✓ Complete
Security design pattern 2: Zero-Trust network segmentation, with documented configuration steps and screenshots	Section 5 — per-tier NSGs that only trust traffic from the specific CIDR range of the tier above, denying all else by default	✓ Complete

Scope note

All screenshots in this document are captured directly from the live Azure Portal session used to build this environment (subscription: `Azure subscription 1`, signed in as `sabithaskaranavar@...`). No illustrative or placeholder

diagrams are used for the VNet/subnet, load balancer, NAT gateway, NSG, or Bastion sections — every screenshot reflects an actual resource created in this project's resource group.

2. Three-Tier Architecture Diagram

The diagram below was produced with a diagramming tool prior to implementation and shows the intended three-tier design for the HVMC Patient Portal VNet: a public Web tier behind a load balancer, a private App tier, a private Data tier, and a dedicated Bastion subnet for management access, all inside a single /16 address space with a NAT Gateway providing outbound-only internet access for the private tiers.

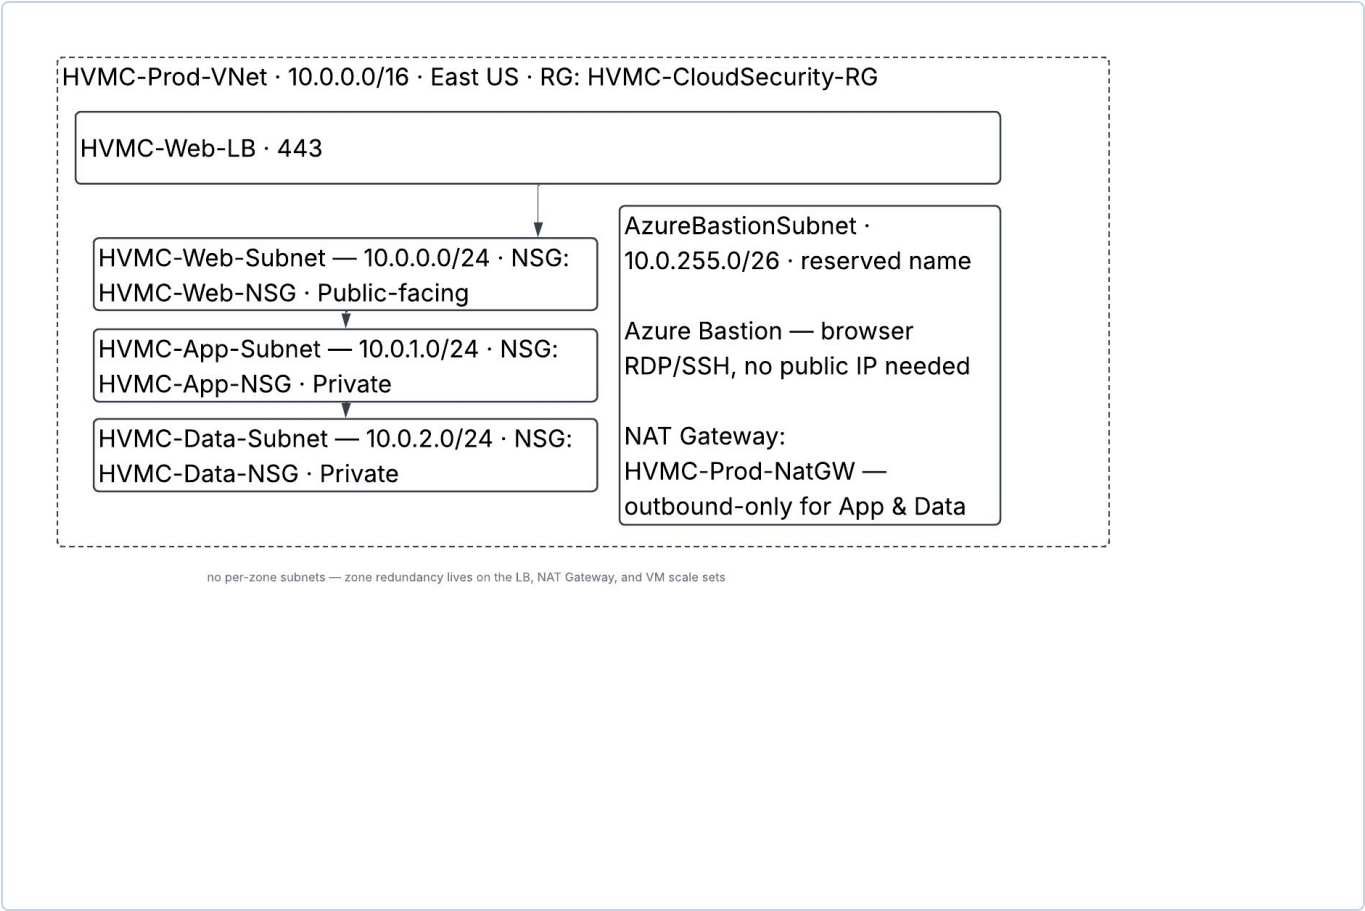


Figure 2.1. HVMC Patient Portal three-tier architecture — Web / App / Data subnets, Standard Load Balancer, NAT Gateway, and Azure Bastion, inside `HVMC-Prod-VNet` (resource group `HVMC-CloudSecurity-RG`, East US).

The design follows standard defense-in-depth segmentation: only the Web tier is reachable from the internet (through the Load Balancer's public IP); the App and Data tiers are private subnets with no inbound internet path and only outbound access via the NAT Gateway; and management access to any tier is routed exclusively through Azure Bastion rather than public RDP/SSH endpoints. Section 7 notes a small addressing difference between this planning diagram and the as-built subnet ranges, reconciled there.

3. Hands-On VNet Configuration — Subnet Segmentation

The virtual network and its four subnets were created directly in the Azure Portal. Azure subnets are region-wide (unlike AWS's per-availability-zone subnets), so zone redundancy for this design comes from the Standard Load Balancer and NAT Gateway SKUs rather than from duplicating subnets per zone.

3.1 Virtual Network Creation

Resource name	HVMC -Prod -VNet
Address space	10.0.0.0/16 (65,536 addresses)
Region	East US
Resource group	HVMC-CloudSecurity-RG
Deployment completed	10/1/2026, 4:32:44 PM

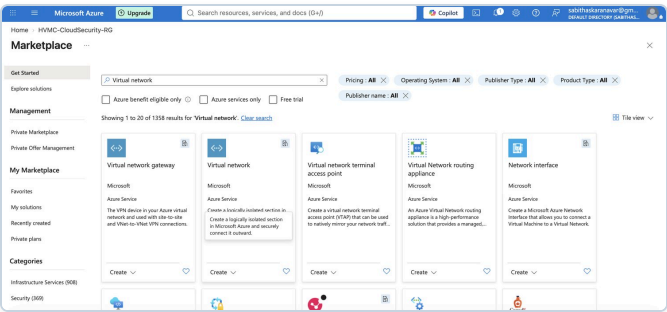


Figure 3.1. Azure Marketplace – searching for the Virtual Network service.

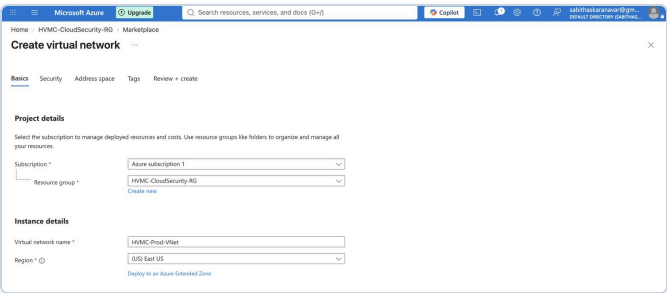


Figure 3.2. Basics tab – naming the VNet **HVMC -Prod -VNet** in East US.

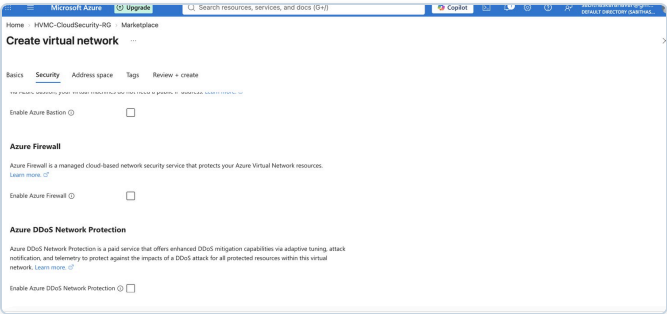


Figure 3.3. Security tab – Azure Bastion and Firewall left unconfigured here; Bastion is deployed separately in Section 6 once its dedicated subnet exists.

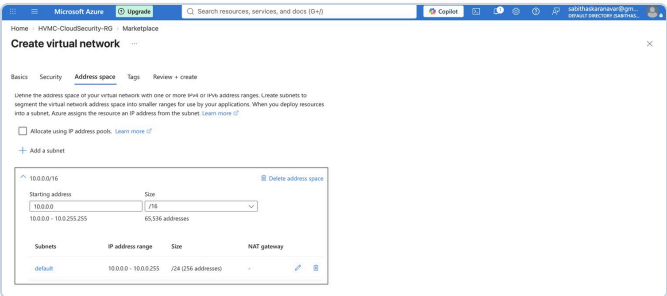


Figure 3.4. Address space tab – **10.0.0.0/16** assigned as the VNet's CIDR block.

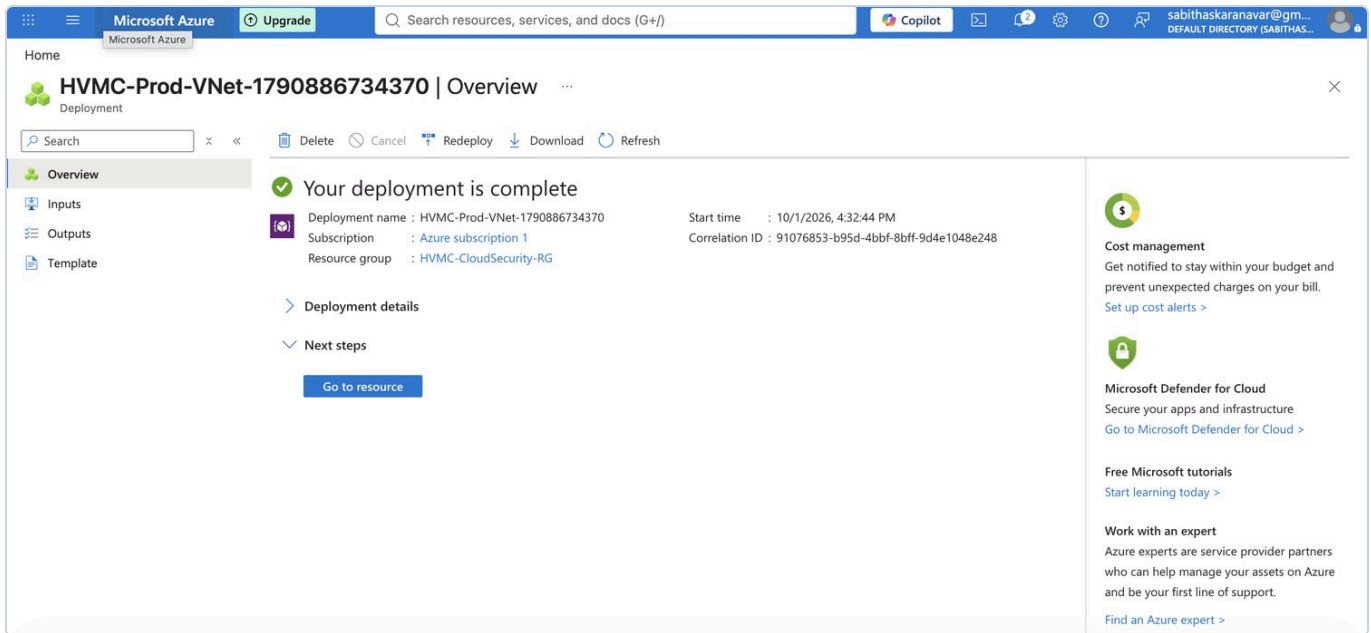


Figure 3.5. Deployment confirmation – "Your deployment is complete," 10/1/2026 4:32:44 PM.

3.2 Subnet Segmentation

Four subnets were added individually to carve the `/16` address space into isolated tiers. Each private-tier subnet was created with "**Enable private subnet (no default outbound access)**" checked, so that App and Data tier resources cannot reach the internet except through the NAT Gateway configured in Section 4.

Subnet	CIDR	Purpose
HVMC -Web -Subnet	10.0.1.0/24	Public-facing web tier, behind the Standard Load Balancer
HVMC -App -Subnet	10.0.2.0/24	Private application tier
HVMC -Data -Subnet	10.0.3.0/24	Private data tier
AzureBastionSubnet	10.0.4.0/26	Reserved subnet for Azure Bastion (Section 6)

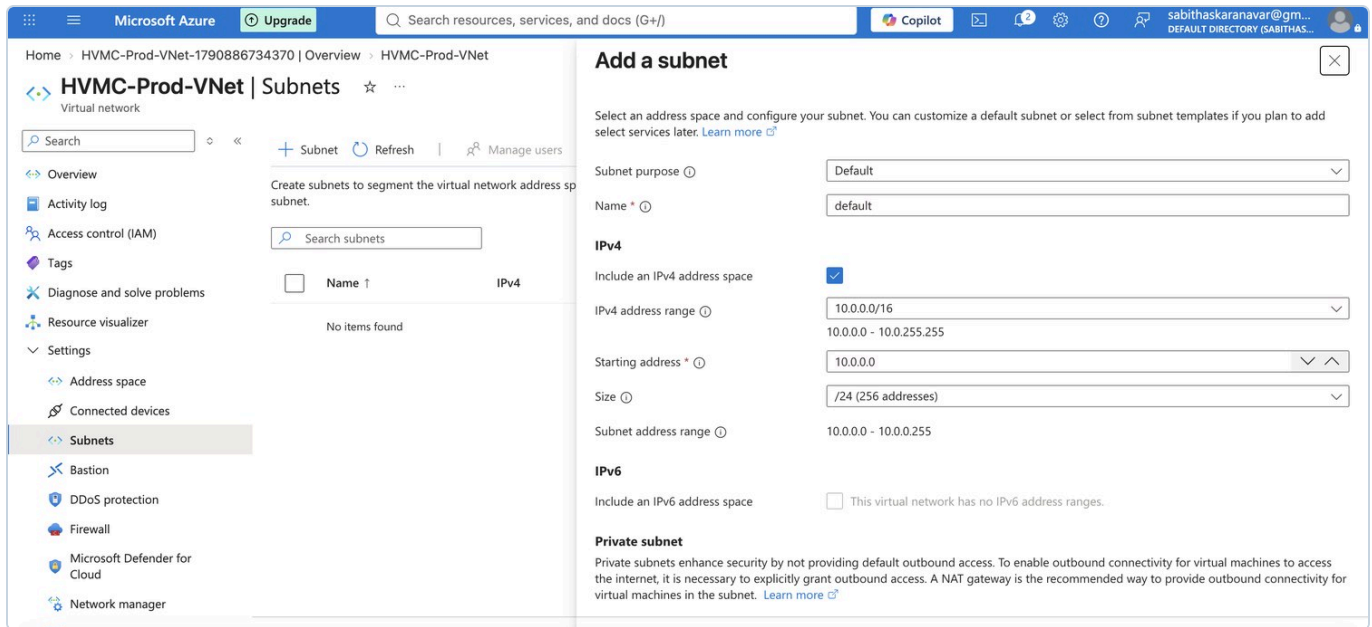


Figure 3.6. "Add a subnet" panel used for each subnet, here showing the default template before customization.

Add a subnet

Subnet address range ⓘ
10.0.1.0 - 10.0.1.255

IPv6

☐ Include an IPv6 address space
☐ This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity for virtual machines in the subnet. [Learn more](#)

☒ Enable private subnet (no default outbound access)

ⓘ
After March 31, 2026, private subnet will be the default selection for new virtual networks. [Learn more](#)

Security

Simplify internet access for virtual machines by using a network address translation gateway. Filter subnet traffic using a network security group. [Learn more](#)

NAT gateway ⓘ

None

ⓘ
A NAT gateway is recommended for outbound internet access from subnets. Edit the subnet to add a NAT gateway. [Learn more](#)

Network security group ⓘ

None

Route table

None

Figure 3.7. HVMC - Web - Subnet configured as 10.0.1.0/24 with the private-subnet option enabled.

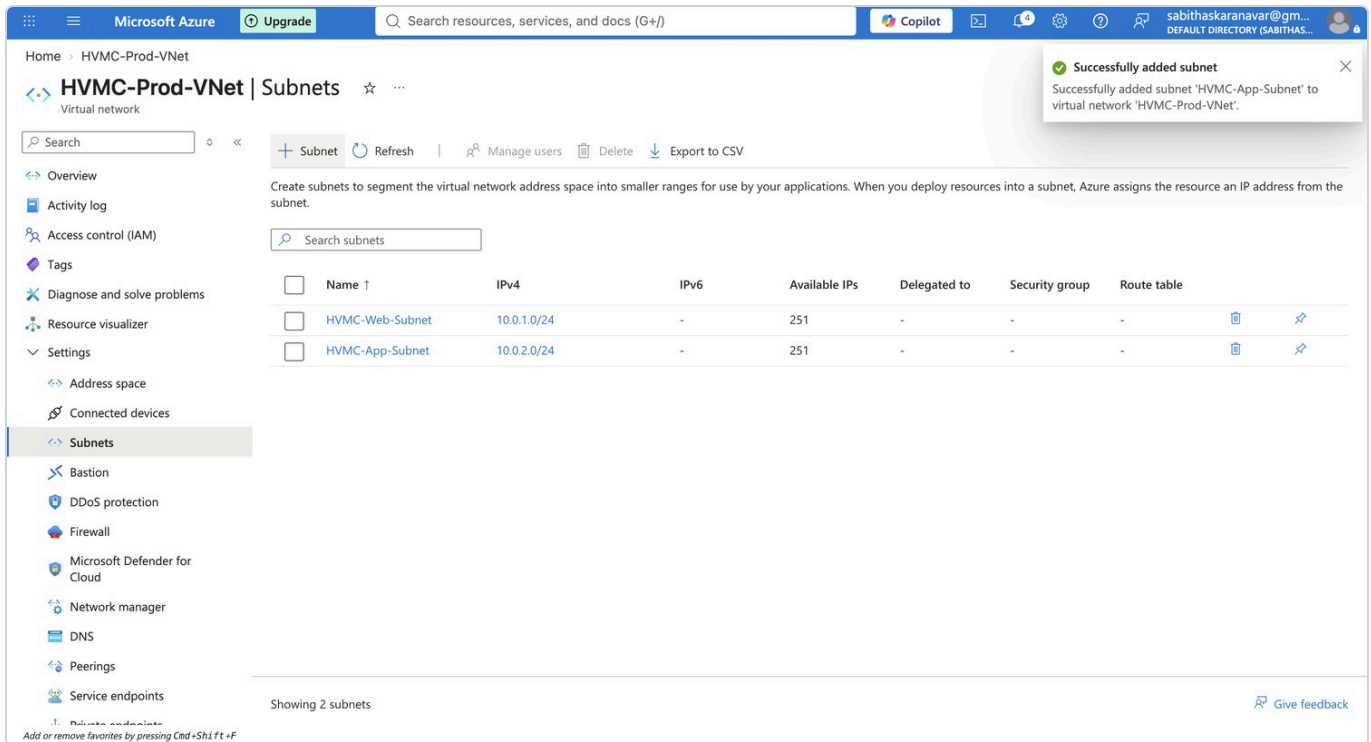


Figure 3.8. Confirmation toast after `HVMC-App-Subnet` was added; two of four subnets now present.

Add a subnet ✕

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet purpose ⓘ

Default

Name * ⓘ

HVMC-Data-Subnet

IPv4

Include an IPv4 address space

☒

IPv4 address range ⓘ

10.0.0.0/16

10.0.0.0 - 10.0.255.255

Starting address * ⓘ

10.0.3.0

Size ⓘ

/24 (256 addresses)

Subnet address range ⓘ

10.0.3.0 - 10.0.3.255

IPv6

Include an IPv6 address space

☐

This virtual network has no IPv6 address ranges.

Figure 3.9. `HVMC-Data-Subnet` configured as `10.0.3.0/24`.

Troubleshooting note

Azure reserves the exact name `AzureBastionSubnet` for use with Azure Bastion and rejects it unless the subnet's **Subnet purpose** dropdown is explicitly set to **Azure Bastion** first. Figure 3.10 shows this validation error encountered during the build; it was resolved by re-selecting the correct subnet purpose before saving, shown in the final four-subnet list in Figure 3.11.

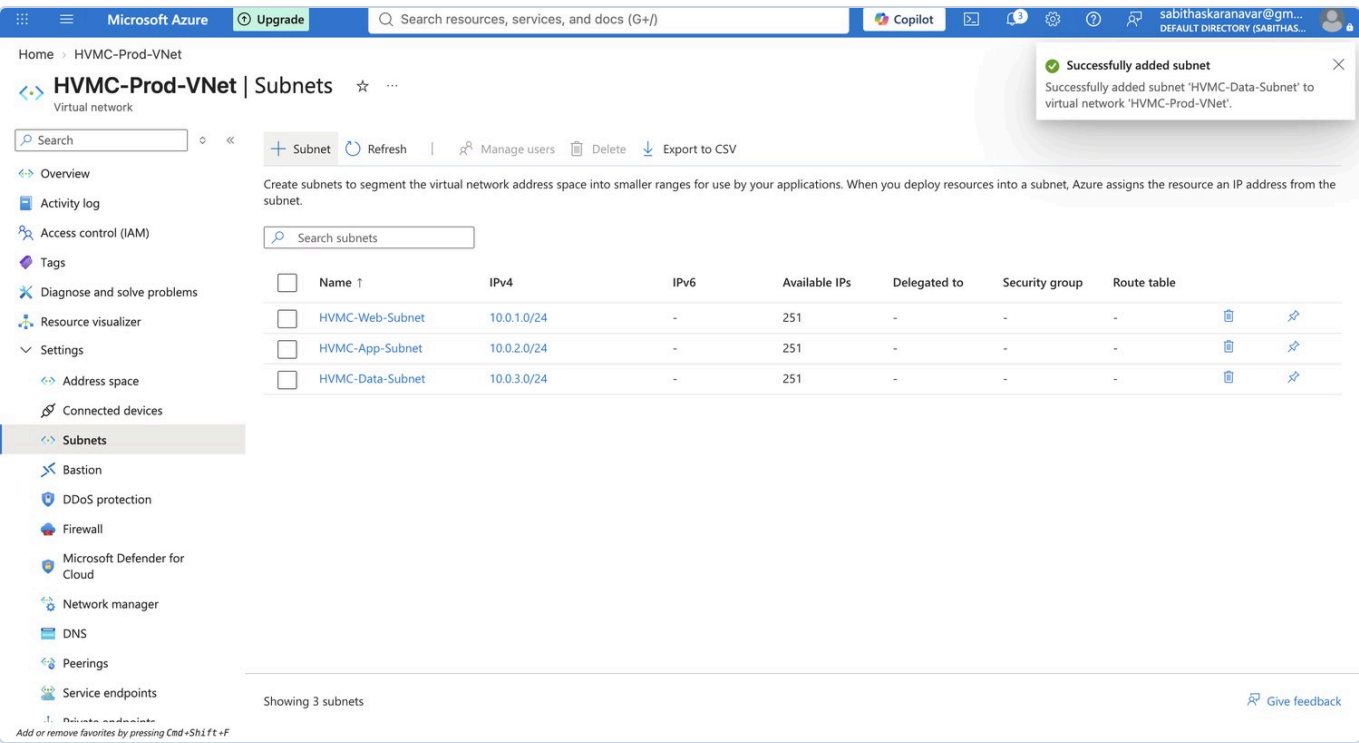


Figure 3.10. Validation error: "Please select 'Azure Bastion' in Subnet purpose dropdown to use the name 'AzureBastionSubnet'."

Add a subnet

×

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet purpose ⓘ

Default

Name * ⓘ

AzureBastionSubnet

Please select 'Azure Bastion' in Subnet purpose dropdown to use the name 'AzureBastionSubnet'.

IPv4

Include an IPv4 address space

☒

IPv4 address range ⓘ

10.0.0.0/16

10.0.0.0 - 10.0.255.255

Starting address * ⓘ

10.0.0.0

▼ ▲

Size ⓘ

/24 (256 addresses)

Subnet address range ⓘ

10.0.0.0 - 10.0.0.255

IPv6

Include an IPv6 address space

☐

This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity for virtual machines in the subnet. [Learn more](#)

Figure 3.11. Final subnet list for `HVMC-Prod-VNet` — all four tiers in place: Web (10.0.1.0/24), App (10.0.2.0/24), Data (10.0.3.0/24), and AzureBastionSubnet (10.0.4.0/26).

4. Supporting Infrastructure — Load Balancer & NAT Gateway

Two supporting resources complete the three-tier network foundation before the security patterns are layered on: a Standard Load Balancer fronts the Web tier, and a NAT Gateway gives the private App and Data tiers outbound-only internet access.

4.1 Standard Load Balancer — HVMC-Web-LB

Name	HVMC-Web-LB
SKU / Type	Standard, Public
Frontend IP	HVMC-Web-LB-FrontendIP (new public IP HVMC-Web-LB-PIP)
Backend pool	HVMC-Web-BackendPool (NIC-based, associated to HVMC-Prod-VNet)
Load balancing rule	HVMC-Web-LB-Rule-HTTPS — TCP 443 → 443
Health probe	HVMC-Web-HealthProbe-443 — TCP 443, 5s interval
Deployment completed	10/5/2026, 1:45:19 PM

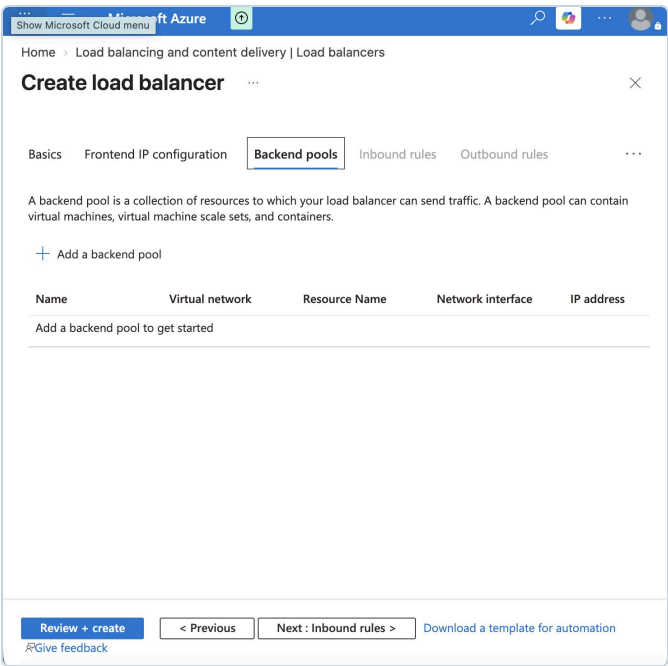


Figure 4.1. Backend pools tab, empty, before adding the Web backend pool.

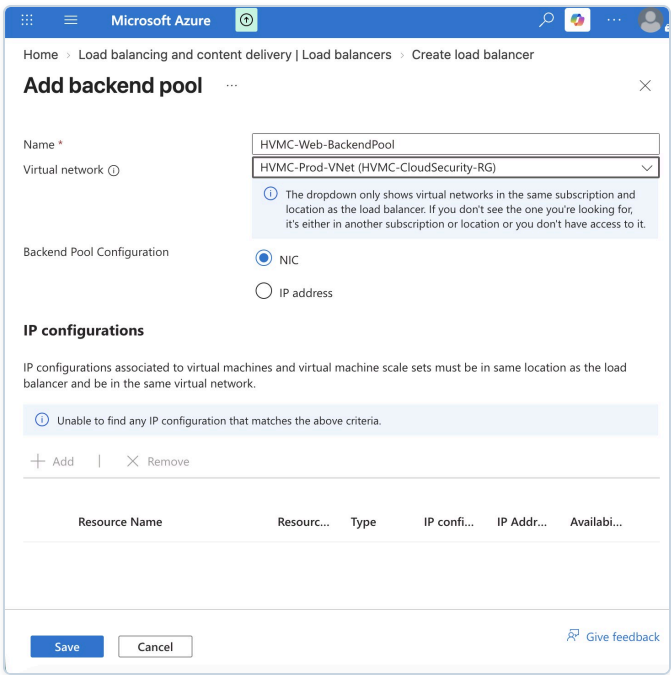


Figure 4.2. HVMC-Web-BackendPool created against HVMC-Prod-VNet .

Microsoft Azure

Home > Load balancer > Add load balancing rule

Create load

Health probes are used to check the status of a backend pool instance. If the health probe fails to get a response from a backend instance then no new connections will be sent to that backend instance until the health probe succeeds again.

Basics Frontend

Load balancing rule

A load balancing rule group of backend pool instances are eligible to receive

+ Add a load balancing rule

Name * Health Probe Name

Protocol * TCP

Port * 443

Interval (seconds) * 5

Used by * Not used

Save Cancel

Figure 4.3. Health probe configured for TCP port 443.

Microsoft Azure

Home > Load balancer > Add load balancing rule

Create load

A load balancing rule distributes incoming traffic that is sent to a selected IP address and port combination across a group of backend pool instances. Only backend instances that the health probe considers healthy receive new traffic. [Learn more.](#)

Basics Frontend

Load balancing rule

A load balancing rule group of backend pool instances are eligible to receive

+ Add a load balancing rule

Name * HVMC-Web-LB-Rule-HTTPS

IP version * IPv4

Frontend IP address * HVMC-Web-LB-FrontendIP (To be created)

Backend pool * HVMC-Web-BackendPool

Protocol TCP

Port * 443

Backend port * 443

Health probe * (new) HVMC-Web-HealthProbe-443 (TCP/443)

Review + create Save Cancel

Give feedback

Figure 4.4. Load balancing rule *HVMC-Web-LB-Rule-HTTPS* : frontend 443 → backend 443, using the new health probe.

Microsoft Azure Upgrade

Search resources, services, and docs (G+/)

Copilot

sabithaskaranavar@gm... DEFAULT DIRECTORY (GABITHAS...)

Home > Load balancing and content delivery | Load balancers

Create load balancer

Validation passed

Basics Frontend IP configuration Backend pools Inbound rules Outbound rules Tags Review + create

Basics

Subscription Azure subscription 1

Resource group HVMC-CloudSecurity-RG

Name HVMC-Web-LB

Region East US

SKU Standard

Tier Regional

Type Public

Frontend IP configuration

Frontend IP configuration name HVMC-Web-LB-FrontendIP

Frontend IP configuration IP address To be created

Backend pools

Backend pool name HVMC-Web-BackendPool

Inbound rules

Load balancing rule name HVMC-Web-LB-Rule-HTTPS

Create < Previous Next > Download a template for automation Give feedback

Figure 4.5. Review + create – "Validation passed" summary of the full load balancer configuration.

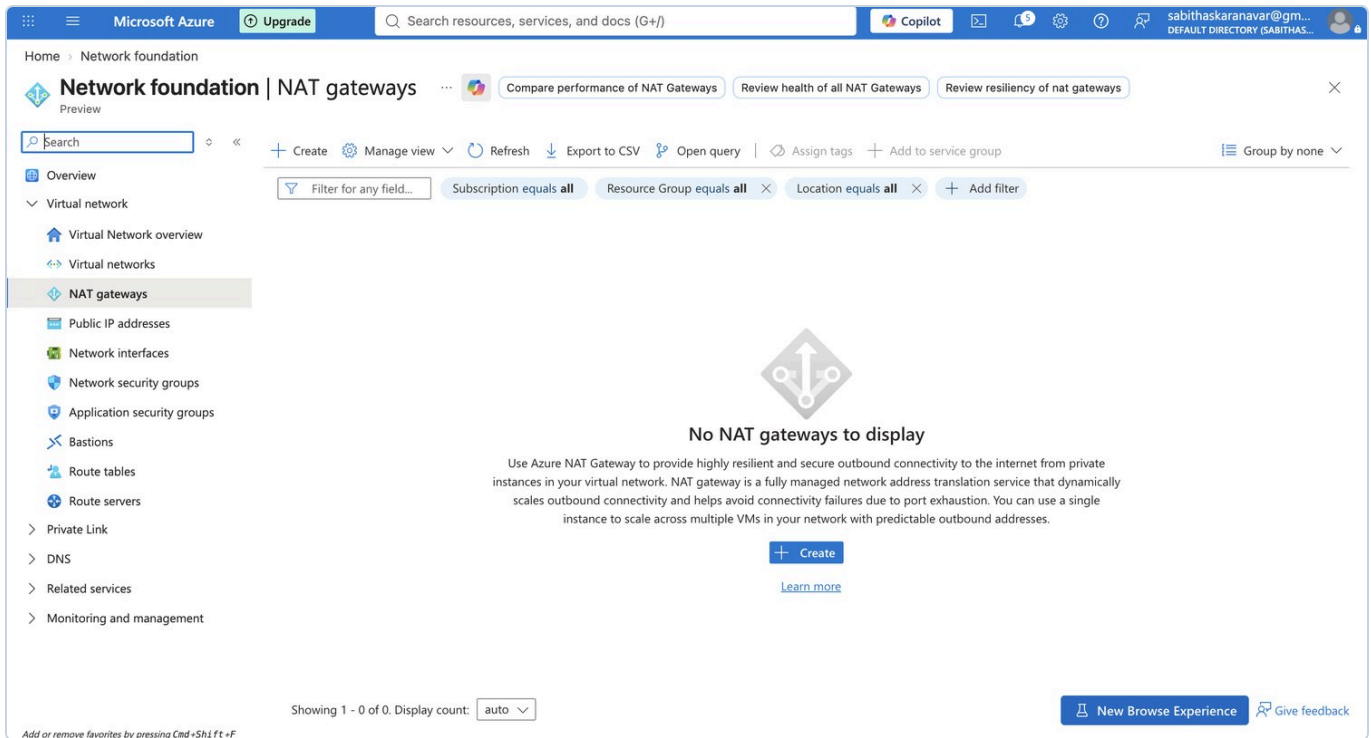


Figure 4.6. Deployment confirmation – "Your deployment is complete," 10/5/2026 1:45:19 PM.

4.2 NAT Gateway — HVMC-Prod-NatGW

Name	HVMC-Prod-NatGW
SKU	Standard V2 (supports zone redundancy and IPv6)
Outbound public IP	HVMC-NatGW-PublicIP
Associated subnets	HVMC-App-Subnet , HVMC-Data-Subnet
Deployment completed	10/5/2026, 2:33:47 PM

Associating the NAT Gateway with the App and Data subnets gives both private tiers outbound internet connectivity (for patching, API calls, etc.) while keeping them unreachable from the internet — the Web tier is intentionally excluded since its outbound path runs through the Load Balancer's public IP.

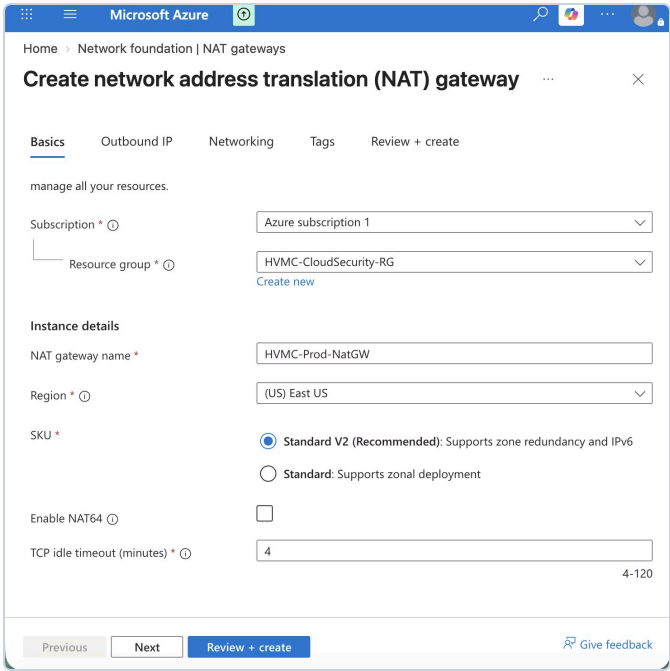


Figure 4.7. Basics tab - *HVMC-Prod-NatGW*, StandardV2 SKU, East US.

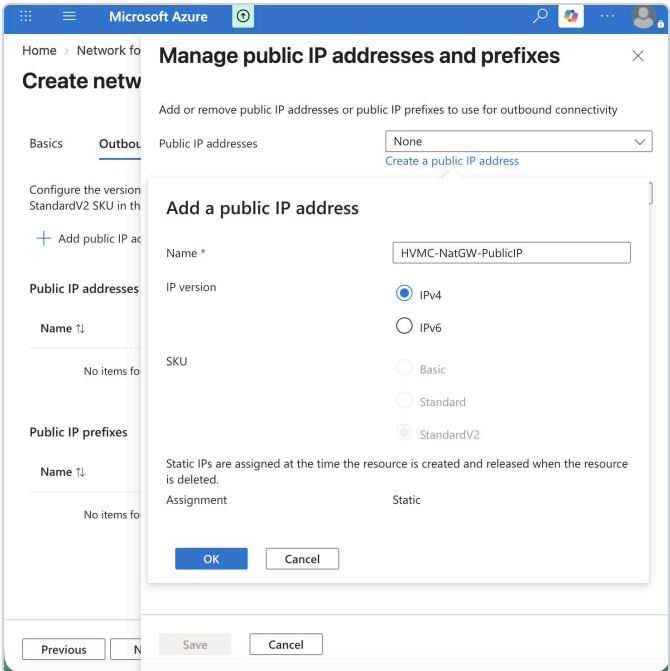


Figure 4.8. Creating the dedicated outbound public IP, *HVMC-NatGW-PublicIP*.

Microsoft Azure

Home > Network foundation | NAT gateways

Create network address translation (NAT) gateway

BasicsOutbound IPNetworkingTagsReview + create

To use the NAT gateway, select a virtual network and then select a subnet within that network. [Learn more](#)

Virtual network

HVMC-Prod-VNet

Select specific subnets

HVMC-App-Subnet (10.0.2.0/24), HVMC-Data-Subnet (10.0.3.0/24)

PreviousNextReview + create

[Give feedback](#)

Figure 4.9. Networking tab – NAT Gateway attached to *HVMC-Prod-VNet*, subnets *HVMC-App-Subnet* and *HVMC-Data-Subnet* selected.

Microsoft Azure Upgrade Search resources, services, and docs (G+/) Copilot sabithaskaranavar@gm... DEFAULT DIRECTORY (SABITHAS...)

Home > Network foundation | NAT gateways

Create network address translation (NAT) gateway

Basics Outbound IP Networking Tags **Review + create**

Basics

Subscription	Azure subscription 1
Resource group	HVMC-CloudSecurity-RG
Name	HVMC-Prod-NatGW
Region	East US
SKU	StandardV2
NAT64	Disabled
TCP idle timeout (minutes)	4

Outbound IP

Public IP addresses (IPv4)	(New) HVMC-NatGW-PublicIP
Public IP addresses (IPv6)	None
Public IP prefixes (IPv4)	None
Public IP prefixes (IPv6)	None

Networking

Virtual network	HVMC-Prod-VNet
Subnets	HVMC-Prod-VNet/HVMC-App-Subnet, HVMC-Prod-VNet/HVMC-Data-Subnet

Tags

Previous Next **Create** Give feedback

Figure 4.10. Review + create summary confirming SKU, outbound IP, and subnet associations.

Microsoft Azure Upgrade Search resources, services, and docs (G+/) Copilot sabithaskaranavar@gm... DEFAULT DIRECTORY (SABITHAS...)

Home

HVMC-Prod-NatGW-20261005143238-6 | Overview

Deployment

Search Delete Cancel Redeploy Download Refresh

Overview

- Inputs
- Outputs
- Template

Your deployment is complete

Deployment name : HVMC-Prod-NatGW-20261005143238-6 Start time : 10/5/2026, 2:33:47 PM
Subscription : Azure subscription 1 Correlation ID : 9aa11afa-9f9e-49e5-97ac-7362894b2771
Resource group : HVMC-CloudSecurity-RG

> Deployment details

> Next steps

[Go to resource](#)

Cost management
Get notified to stay within your budget and prevent unexpected charges on your bill.
[Set up cost alerts >](#)

Microsoft Defender for Cloud
Secure your apps and infrastructure
[Go to Microsoft Defender for Cloud >](#)

Free Microsoft tutorials
[Start learning today >](#)

Work with an expert
Azure experts are service provider partners who can help manage your assets on Azure and be your first line of support.
[Find an Azure expert >](#)

Add or remove favorites by pressing Cmd+Shift+F

Figure 4.11. Deployment confirmation – "Your deployment is complete," 10/5/2026 2:33:47 PM.

5. Security Design Pattern 1: Network Security Groups (Zero-Trust Segmentation)

Azure's Network Security Group (NSG) is the single stateful firewall construct that covers both of AWS's separate Security Group and NACL concepts. One NSG was created per tier and associated to that tier's subnet. Each NSG's custom inbound rule only trusts traffic from the specific CIDR range of the tier directly above it — never "Any" — which is the core of the zero-trust segmentation pattern: every hop must be explicitly allowed, and everything else falls through to the default `DenyAllInBound` rule.

NSG	Associated subnet	Custom inbound rule	Trust boundary
HVMC - Web - NSG	HVMC-Web-Subnet (10.0.1.0/24)	Allow-HTTPS-Inbound: TCP 443, Any → Any	Internet-facing (only HTTPS)
HVMC - App - NSG	HVMC-App-Subnet (10.0.2.0/24)	Allow-App-From-Web: TCP 8080, source 10.0.1.0/24	Web tier only
HVMC - Data - NSG	HVMC-Data-Subnet (10.0.3.0/24)	Allow-Data-From-App: TCP 1433, source 10.0.2.0/24	App tier only

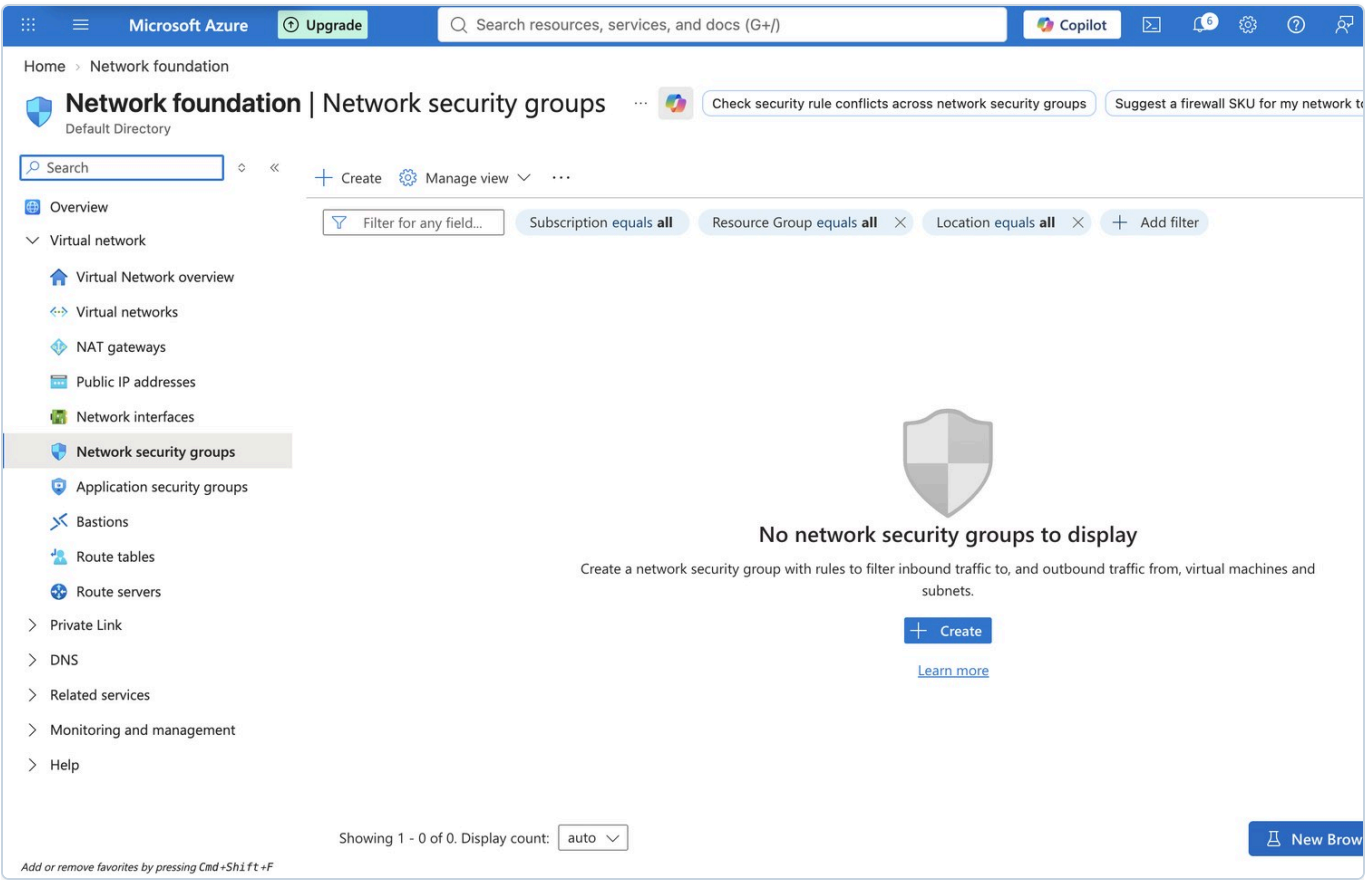


Figure 5.1. Network security groups blade, empty, before the three NSGs were created.

5.1 HVMC-Web-NSG

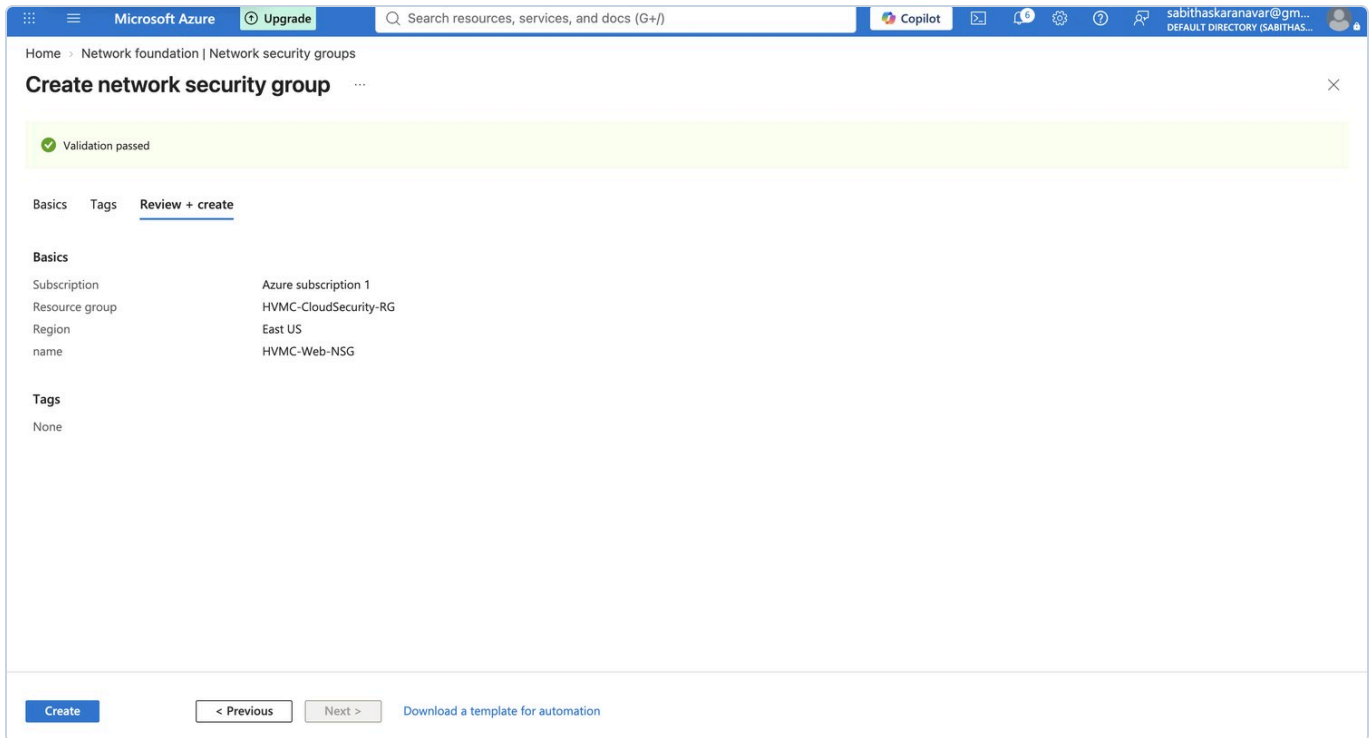


Figure 5.2. Review + create – "Validation passed" for HVMC-Web-NSG .

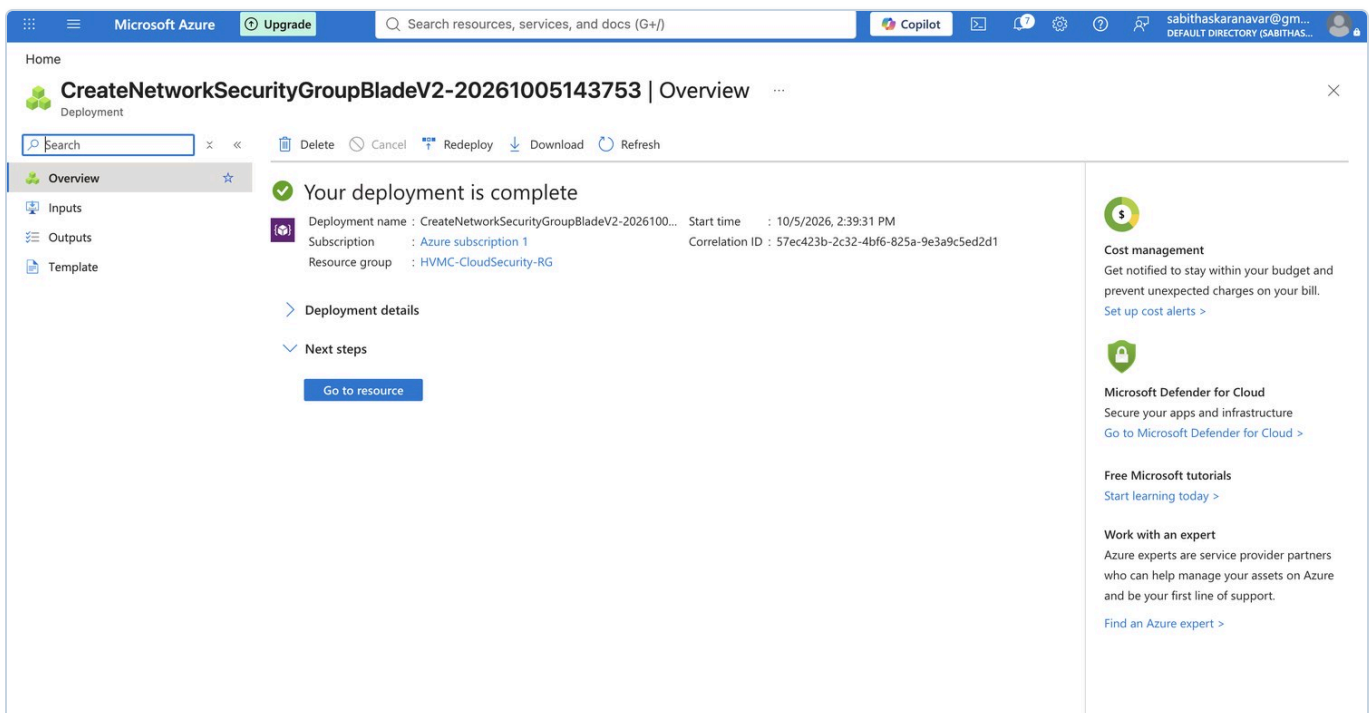


Figure 5.3. Deployment complete, 10/5/2026 2:39:31 PM.

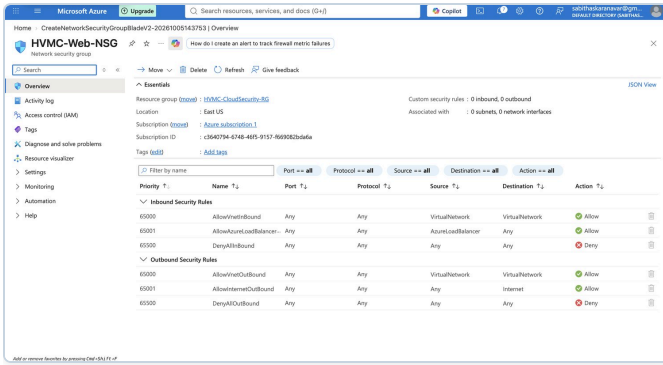


Figure 5.4. Inbound rules – custom rule **Allow-HTTPS-Inbound** (priority 100, TCP 443, Any→Any) above the default Allow-VNet / Allow-LoadBalancer / Deny-All rules.

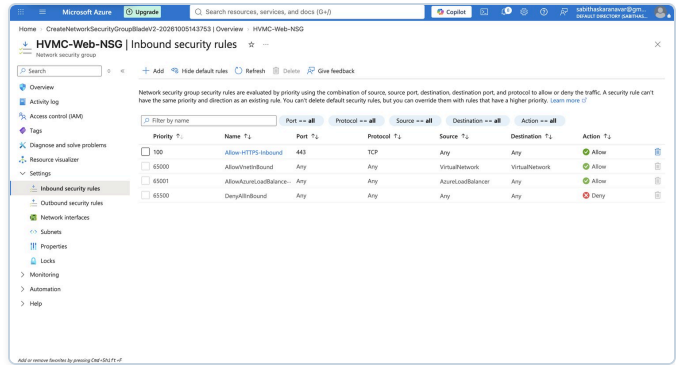


Figure 5.5. Subnet association – **HVMC-Web-Subnet** (10.0.1.0/24).

5.2 HVMC-App-NSG

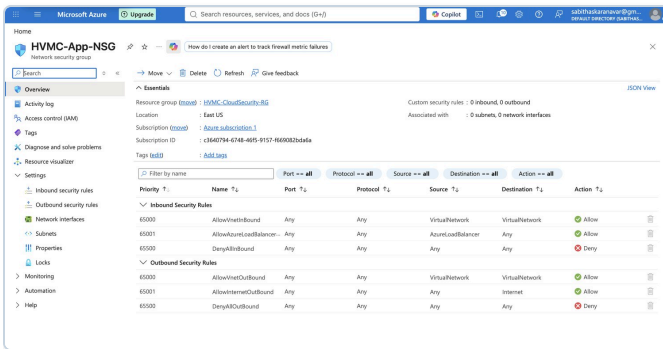


Figure 5.6. Overview and rule list – **Allow-App-From-Web**, TCP 8080, source **10.0.1.0/24** only.

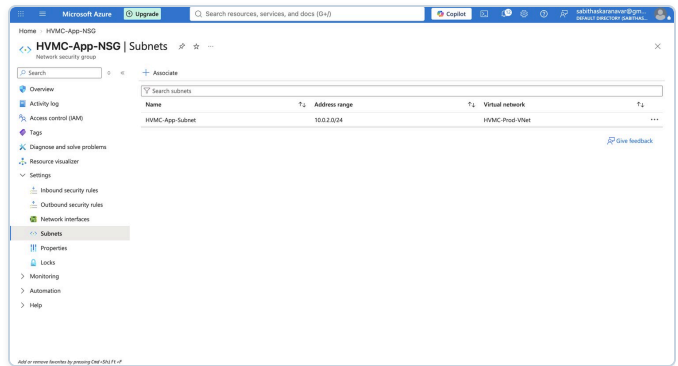


Figure 5.7. Subnet association – **HVMC-App-Subnet** (10.0.2.0/24).

5.3 HVMC-Data-NSG

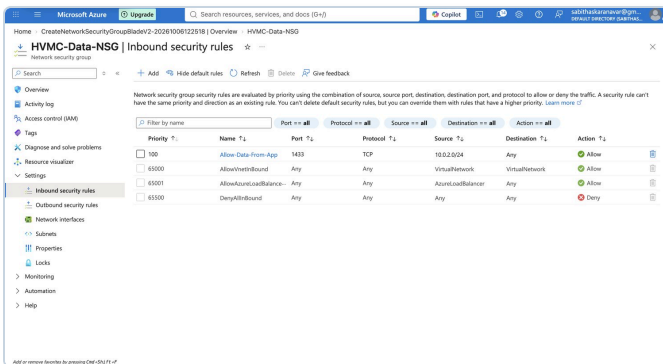


Figure 5.8. Inbound rules – **Allow-Data-From-App**, TCP 1433, source **10.0.2.0/24** only.

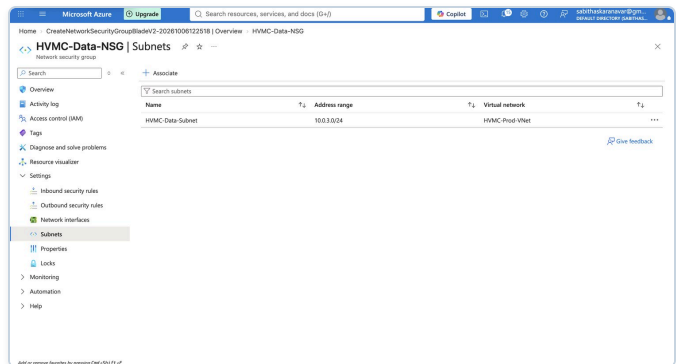


Figure 5.9. Subnet association – **HVMC-Data-Subnet** (10.0.3.0/24).

Why this is zero-trust, not just a firewall

Every custom rule names a specific /24 source range tied to exactly one upstream tier instead of trusting the whole VNet or "Any" source. A compromised host in the Data tier cannot reach the App tier laterally, and a compromised host in the App tier cannot reach the Web tier at all — each tier only accepts the one connection pattern it legitimately needs, which is the defining property of zero-trust segmentation as distinct from a traditional perimeter firewall.

6. Security Design Pattern 2: Bastion Host

Azure Bastion is the managed, PaaS implementation of the bastion-host pattern: it provides browser-based RDP/SSH access to virtual machines inside the VNet without ever assigning those VMs a public IP address and without opening any inbound RDP/SSH port to the internet. It was deployed into the reserved `AzureBastionSubnet` created in Section 3.2.

Name	HVMC-Bastion
Tier	Basic
Availability zones	Zones 1, 2, 3
Virtual network	HVMC-Prod-VNet
Subnet	AzureBastionSubnet — 10.0.4.0/26 (10.0.4.0 - 10.0.4.63)
Public IP	HVMC-Bastion-PublicIP (new, Static)
Deployment completed	10/6/2026, 1:31:32 PM (deployment Microsoft.BastionHost-20261006133130)

Microsoft Azure

Home > Load balancing and content delivery | Load balancers

Create load balancer

BasicsFrontend IP configurationBackend poolsInbound rulesOutbound rules

A frontend IP configuration is an IP address used for inbound and/or outbound communication as defined within load balancing, inbound NAT, and outbound rules.

+ Add a frontend IP configuration

Name ↑↓	IP address ↑↓	
HVMC-Web-LB-FrontendIP	(new) HVMC-Web-LB-PIP (To be created)	

Review + create

< Previous

Next : Backend pools >

Download a template for automation

Give feedback

Figure 6.1. The dedicated `AzureBastionSubnet` (10.0.4.0/26) available in `HVMC-Prod-VNet` before Bastion deployment.

Microsoft Azure

Home > Bastions

Create a Bastion

BasicsAdvancedTagsReview + create

Bastion allows web based RDP access to your vnet VM. [Learn more](#)

Project details

Subscription *

Azure subscription 1

Resource group *

HVMC-CloudSecurity-RG

Create new

Instance details

Name *

HVMC-Bastion

Region *

East US

Availability zone ⓘ

Zones 1, 2, 3

Tier * ⓘ

Basic

Instance count ⓘ

2

Virtual Network ⓘ

HVMC-Prod-VNet (HVMC-CloudSecurity-RG)

Edit virtual network

Subnet ⓘ

AzureBastionSubnet

Edit subnet

10.0.4.0 - 10.0.4.63 (64 addresses)

Review + create

Previous

Next : Advanced >

[Download a template for automation](#)

Figure 6.2. Basics tab - `HVMC-Bastion` targeting `HVMC-Prod-VNet` / `AzureBastionSubnet`, Zones 1-3, Basic tier.

Microsoft Azure



Home > Bastions

Create a Bastion

×

Instance count ⓘ

2

Virtual Network ⓘ

HVMC-Prod-VNet (HVMC-CloudSecurity-RG) ▾

[Edit virtual network](#)

Subnet ⓘ

AzureBastionSubnet ▾

[Edit subnet](#) 10.0.4.0 - 10.0.4.63 (64 addresses)

Configure IP Address

IP Address ⓘ

☒ Public IP addresses

☐ Private IP address

Public IPv4 address

Public IP address * ⓘ

☒ Create new

☐ Use existing

Public IP address name *

HVMC-Prod-VNet-IPv4

Availability zone

Zone-redundant (if available)

Dual Stack (Preview)

☐

Review + create

Previous

Next : Advanced >

[Download a template for automation](#)

Figure 6.3. Public IP configuration - new static IPv4 address `HVMC-Bastion-PublicIP` created for the Bastion host.

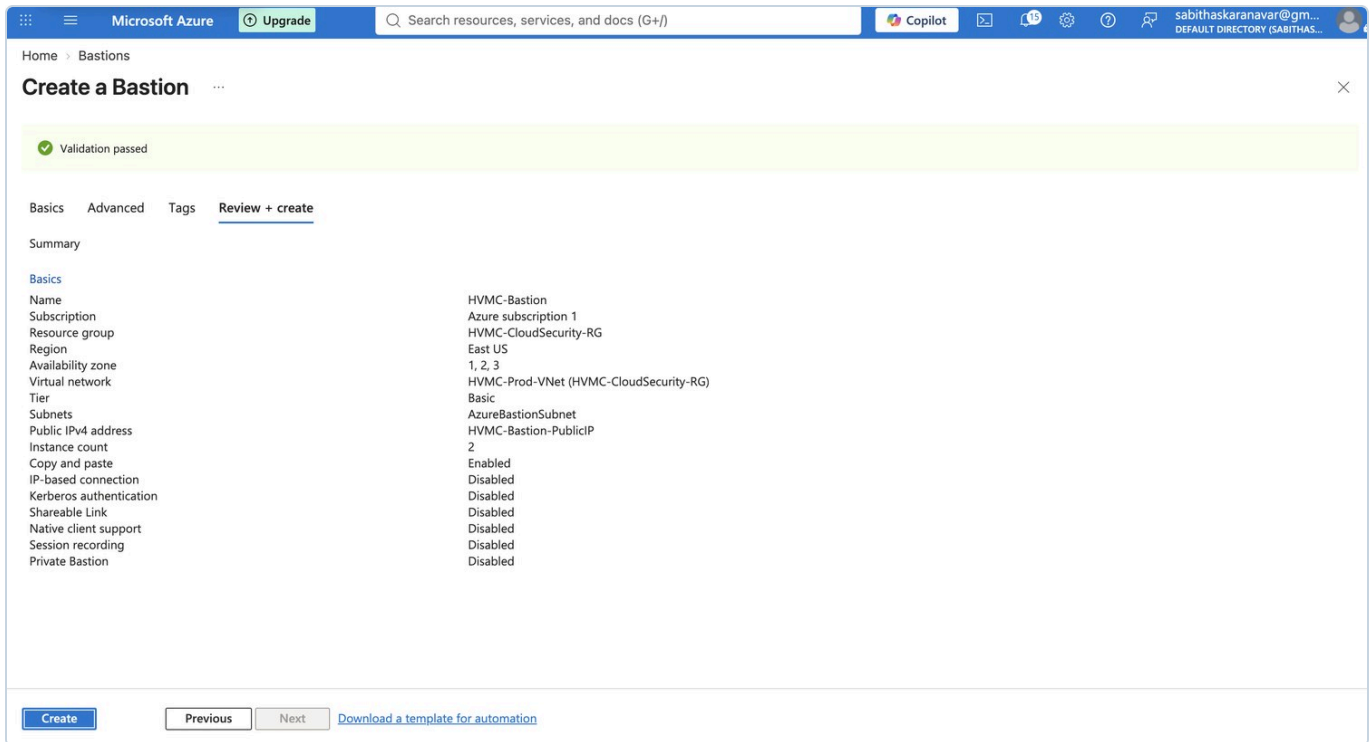


Figure 6.4. Review + create – "Validation passed" summary (name, subnet, public IP, instance count).

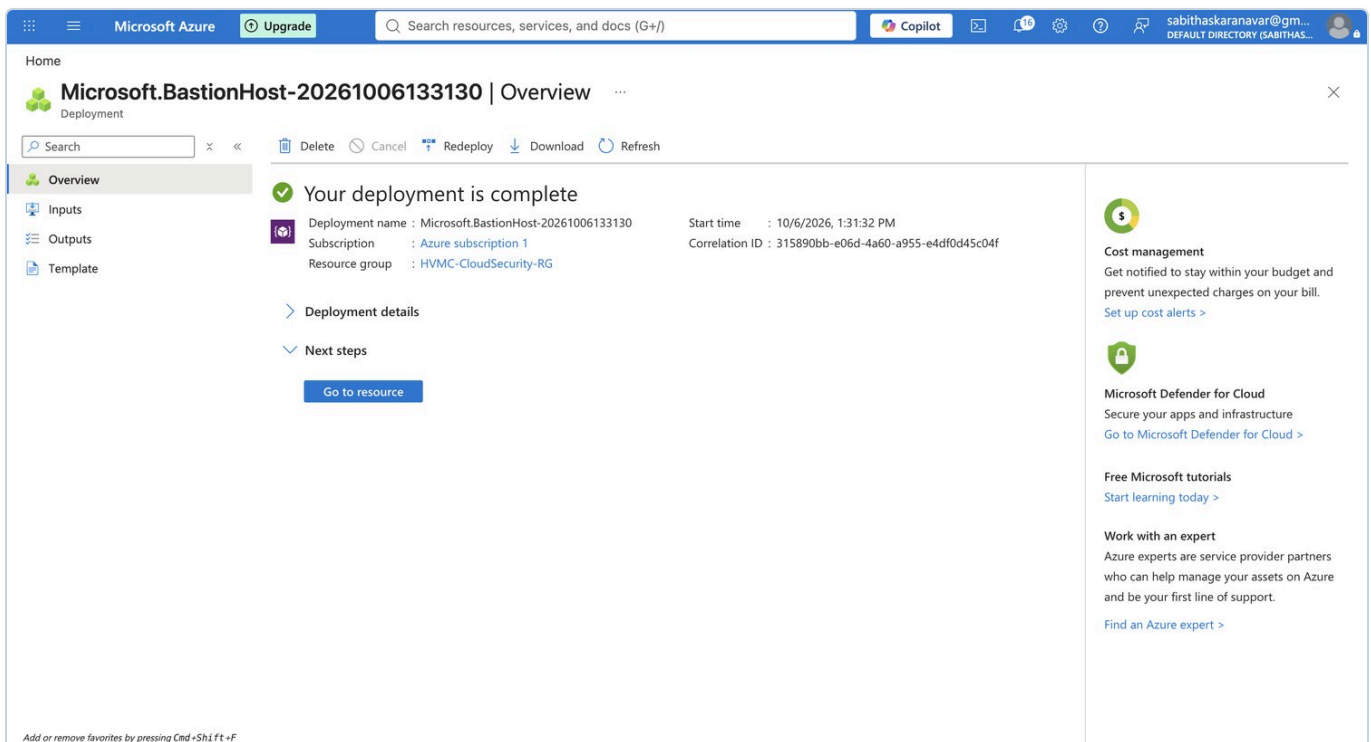


Figure 6.5. Deployment confirmation – "Your deployment is complete," `Microsoft.BastionHost-20261006133130` , 10/6/2026 1:31:32 PM, resource group `HVMC-CloudSecurity-RG` .

Why this satisfies the bastion-host pattern

No virtual machine in any tier needs a public IP address or an open inbound 3389/22 rule to be managed — administrators connect to Azure Bastion's single hardened entry point over HTTPS in the portal, and Bastion then proxies the RDP/SSH session over the private VNet address space. This collapses the attack surface for management access down to one managed, Microsoft-patched entry point instead of N publicly reachable VMs.

7. Configuration Notes & Reconciliation

7.1 Address space: diagram vs. as-built subnets

The planning diagram in Section 2 was drawn with illustrative CIDR ranges (Web 10.0.0.0/24, App 10.0.1.0/24, Data 10.0.2.0/24, Bastion 10.0.255.0/26) before the hands-on build began. During implementation, the as-built subnet ranges were assigned sequentially as shown in Section 3.2:

Tier	Diagram (planning)	As-built (implemented)
Web	10.0.0.0/24	10.0.1.0/24
App	10.0.1.0/24	10.0.2.0/24
Data	10.0.2.0/24	10.0.3.0/24
Bastion	10.0.255.0/26	10.0.4.0/26

The tier ordering, trust boundaries, and overall /16 parent address space (10.0.0.0/16) are unchanged — only the specific octet assigned to each tier shifted during implementation. All NSG rules, NAT Gateway associations, and Bastion subnet references documented in Sections 4–6 correctly reference the **as-built** ranges above, so the security posture described in this document matches the live environment exactly.

7.2 Resource inventory summary

Resource type	Name(s)
Resource group	HVMC-CloudSecurity-RG (East US)
Virtual network	HVMC-Prod-VNet (10.0.0.0/16)
Subnets	HVMC-Web-Subnet, HVMC-App-Subnet, HVMC-Data-Subnet, AzureBastionSubnet
Load balancer	HVMC-Web-LB (Standard, Public)
NAT gateway	HVMC-Prod-NatGW (StandardV2)
Network security groups	HVMC-Web-NSG, HVMC-App-NSG, HVMC-Data-NSG
Bastion host	HVMC-Bastion (Basic tier, Zones 1–3)

7.3 Rubric coverage recap

- **Three-tier architecture diagram** with public/private subnets, security groups, and NACL-equivalent controls — Section 2.
- **Hands-on VPC/VNet configuration** with subnet segmentation and security group rules, built live in Azure — Sections 3–5.
- **Security design pattern 1 (Bastion Host)**, fully documented with configuration steps and screenshots through deployment completion — Section 6.
- **Security design pattern 2 (Zero-Trust segmentation)** via per-tier NSGs with scoped source CIDRs — Section 5.

