

Linux Assignment

Assignment No:02

Course title: Computer Network

Date of Performance:24-12-20

Date of Submission:24-12-20

Submitted by

Name: Sabikun Nahar Piya,Fatema
Tuz Zannat

ID:IT-18020,IT-18028

3rd year 2nd semester

Session: 2016-2017

Dept. of ICT

Submitted To

Nazrul Islam

Assistant Professor

Dept. of ICT

MBSTU.

1)Introduction

If you have a network that ranges from 192.168.1.0 to 192.168.1.255 explain why individual devices in the network can only be assigned IP addresses in the range of 192.168.1.1 to 192.168.1.254(**write down the answers in your written report**)

Ans:

If I have a network that ranges from 192.168.1.0 to 192.168.1.255 ,then we can say that:

1)The network identifier would be 192.168.1.0

An address like 192.168.0.0 becomes unusable for any other purpose after it's established as a network number. If an administrator assigns 192.168.0.0 to any device on the network as a static IP address, the network stops functioning until that device is taken offline.As a network number, this address is used in routing tables and by routers to share network information with each other.

2)The broadcast address would be 192.168.1.255


A broadcast is a multipoint connection in a computer network. A data packet is transmitted from one point to all users of a messaging network in this way. This occurs with the use of the broadcast address.

So, valid ip addresses would be 192.168.1.1 to 192.168.1.254.

2)Find IP & MAC

Find out about network and hardware information for the computer you are currently using.(**write down the IP & MAC address of your computer in your written report**)

My IP address is 192.168.0.102 MAC address is 70-60-55-08-0C-05

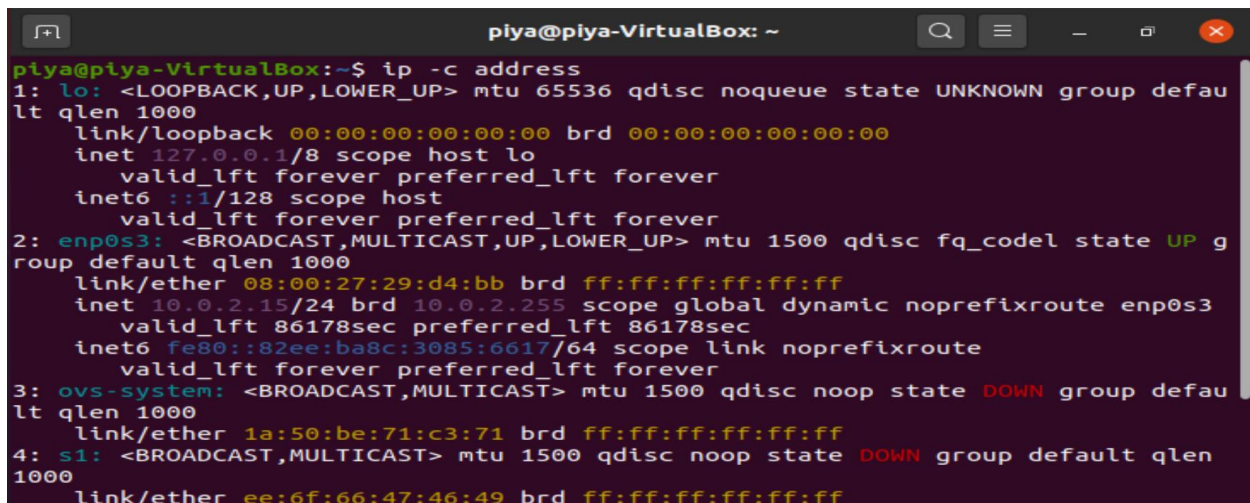

```
piya@piya-VirtualBox: ~  
piya@piya-VirtualBox:~$ ip -c address  
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group defau  
lt qlen 1000  
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00  
    inet 127.0.0.1/8 scope host lo  
        valid_lft forever preferred_lft forever  
    inet6 ::1/128 scope host  
        valid_lft forever preferred_lft forever  
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP g  
roup default qlen 1000  
    link/ether 08:00:27:29:d4:bb brd ff:ff:ff:ff:ff:ff  
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3  
        valid_lft 86178sec preferred_lft 86178sec  
    inet6 fe80::82ee:ba8c:3085:6617/64 scope link noprefixroute  
        valid_lft forever preferred_lft forever  
3: ovs-system: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group defau  
lt qlen 1000  
    link/ether 1a:50:be:71:c3:71 brd ff:ff:ff:ff:ff:ff  
4: s1: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group default qlen  
1000  
    link/ether ee:6f:66:47:46:49 brd ff:ff:ff:ff:ff:ff
```

3)Routing Table basics

Now enter the command: "**netstat -r**" to print your computer's routing table. Explain (very briefly) the different columns: **Destination, Gateway, Genmask, Flags, MSS, Window, irtt** and **Iface** (write the ans in your written report in table form)

Ans:

```

piya@piya-VirtualBox: ~$ netstat -r
Kernel IP routing table
Destination      Gateway         Genmask         Flags       MSS  Window  irtt  Iface
default          _gateway       0.0.0.0         UG          0    0        0     enp0s3
10.0.2.0         0.0.0.0        255.255.255.0   U           0    0        0     enp0s3
link-local       0.0.0.0        255.255.0.0     U           0    0        0     enp0s3
piya@piya-VirtualBox: ~$

```

- **Destination** : The destination network or destination host.
- **Gateway** : The gateway address or '*' if none set.
- **Genmask** : The netmask for the destination net; 255.255.255.255 for a host destination and 0.0.0.0 for the default route.
- **Flags** : The U output in this column means that the route is up. The G output indicates that specified gateway should be used for this route. D stands for dynamically installed, M stands for modified, and R means reinstated.
- **MSS** : Default maximum segment size for TCP connections over
- **Window** : Default window size for TCP connections over this route.
- **irtt** : Initial RTT (Round Trip Time). The kernel uses this to guess about the best TCP protocol parameters without waiting on (possibly slow) answers.
- **Iface** : Interface to which packets for this route will be sent.

4) Virtual Interfaces

Linux offers the possibility to set up interfaces according to your networking needs. For instance, if needed, you can configure an interface for multiple IP addresses by creating new virtual interfaces with another IP address

a) Create a new virtual interface with following IP addresses, 192.168.2.32 and netmask 255.255.255.0 then check to see if the interface was created successfully? (**save a screenshot of your interface table to display in your written report document**)

b) Now, you need to set up a route for this interface so that your computer can see it. Otherwise, everyone else on the network will be able to reach the new interface except you. Issue the needed command, then issue the "**\$netstat -r**" command and check if the route to your added interface is visible (**save a print screen of your routing table to display in your written report document together with the command(s) you used to set up the interface**)

c) Next remove the route for this interface (**write down the command(s) in your written report**)

d) Then remove the interface completely (**write down the command(s) in your written report**)

Ans:

a)Creating virtual interface:

```
sudo ip addr add 192.168.2.32/24 brd + dev enp0s3 label enp0s3:pin
```

```
piya@piya-VirtualBox:~$ ip -c a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group defau
lt qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP g
roup default qlen 1000
    link/ether 08:00:27:29:d4:bb brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
        valid_lft 84003sec preferred_lft 84003sec
    inet6 fe80::82ee:ba8c:3085:6617/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: ovs-system: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group defau
lt qlen 1000
    link/ether 1e:f1:a3:e6:e0:1f brd ff:ff:ff:ff:ff:ff
4: s1: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group default qlen
1000
    link/ether ee:6f:66:47:46:49 brd ff:ff:ff:ff:ff:ff
piya@piya-VirtualBox:~$ sudo ip addr add 192.168.2.32/24 brd + dev enp0s3 label
enp0s3:pin
piya@piya-VirtualBox:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::82ee:ba8c:3085:6617 prefixlen 64 scopeid 0x20<link>
    ether 08:00:27:29:d4:bb txqueuelen 1000 (Ethernet)
    RX packets 77770 bytes 81827915 (81.8 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 22485 bytes 1533452 (1.5 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp0s3:pin: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.2.32 netmask 255.255.255.0 broadcast 192.168.2.255
    ether 08:00:27:29:d4:bb txqueuelen 1000 (Ethernet)

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 926 bytes 58314 (58.3 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 926 bytes 58314 (58.3 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

b)Inserting Interface in the routing table:

```
sudo route add default gw 192.168.2.32
```



```

piya@piya-VirtualBox:~$ netstat -r
Kernel IP routing table
Destination        Gateway            Genmask           Flags       MSS  Window  irtt  Iface
default            _gateway          0.0.0.0           UG          0 0      0  enp0s3
10.0.2.0           0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
link-local         0.0.0.0           255.255.0.0       U           0 0      0  enp0s3
192.168.2.0        0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
piya@piya-VirtualBox:~$ sudo route add default gw 192.168.2.32
piya@piya-VirtualBox:~$ netstat -r
Kernel IP routing table
Destination        Gateway            Genmask           Flags       MSS  Window  irtt  Iface
default            192.168.2.32      0.0.0.0           UG          0 0      0  enp0s3
default            10.0.2.2          0.0.0.0           UG          0 0      0  enp0s3
10.0.2.0           0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
link-local         0.0.0.0           255.255.0.0       U           0 0      0  enp0s3
192.168.2.0        0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
piya@piya-VirtualBox:~$ netstat -rn
Kernel IP routing table
Destination        Gateway            Genmask           Flags       MSS  Window  irtt  Iface
0.0.0.0            192.168.2.32      0.0.0.0           UG          0 0      0  enp0s3
0.0.0.0            10.0.2.2          0.0.0.0           UG          0 0      0  enp0s3
10.0.2.0           0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
169.254.0.0        0.0.0.0           255.255.0.0       U           0 0      0  enp0s3
192.168.2.0        0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
piya@piya-VirtualBox:~$

```

C)Deleting Interface from routing table:

Sudo route delete default gw 192.168.2.32

```

piya@piya-VirtualBox:~$ sudo route delete default gw 192.168.2.32
piya@piya-VirtualBox:~$ netstat -rn
Kernel IP routing table
Destination        Gateway            Genmask           Flags       MSS  Window  irtt  Iface
0.0.0.0            10.0.2.2          0.0.0.0           UG          0 0      0  enp0s3
10.0.2.0           0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
169.254.0.0        0.0.0.0           255.255.0.0       U           0 0      0  enp0s3
192.168.2.0        0.0.0.0           255.255.255.0     U           0 0      0  enp0s3
piya@piya-VirtualBox:~$

```

d)Deleting virtual Interface:

sudo ip addr delete 192.168.2.32/24 dev enp0s3:pin

```

piya@piya-VirtualBox:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::82ee:ba8c:3085:6617 prefixlen 64 scopeid 0x20<link>
    ether 08:00:27:29:d4:bb txqueuelen 1000 (Ethernet)
    RX packets 249011 bytes 237002323 (237.0 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 92299 bytes 5730314 (5.7 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp0s3:pin: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.2.32 netmask 255.255.255.0 broadcast 192.168.2.255
    ether 08:00:27:29:d4:bb txqueuelen 1000 (Ethernet)

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 2493 bytes 189329 (189.3 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 2493 bytes 189329 (189.3 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

```

```
piya@piya-VirtualBox:~$ sudo ip addr delete 192.168.2.32/24 dev enp0s3:pin
piya@piya-VirtualBox:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::82ee:ba8c:3085:6617 prefixlen 64 scopeid 0x20<link>
    ether 08:00:27:29:d4:bb txqueuelen 1000 (Ethernet)
    RX packets 249011 bytes 237002323 (237.0 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 92337 bytes 5732664 (5.7 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 2559 bytes 194165 (194.1 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 2559 bytes 194165 (194.1 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```