Krinda

LASER PROJECTOR Krinda C-WU1200L

Illuminate Your Inspiration




DLP Technology
12,000 Lumens Brightness
4K Compatible, HDR Support
Active/Passive 3D Support
Warping & Blending
720° Unlimited Projection
Motorized Lens Shift, Lens Memory
20,000 Hours of Illumination Performance

Exhibitions & Displays/Theme Parks/Attractions/Education/Scientific Research/Live Events & Shows/Staging & Rental/Hotels/Corporate Solutions & Conference Rooms



Krinda
C-WU1200L

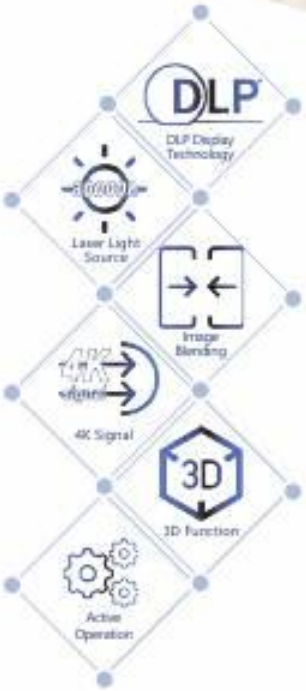

With DLP technology of TI and 0.67" DMD chip, the Krinda C-WU1200L projector delivers 12,000 lumens of brightness, a 1920×1200 native resolution, offers 4K compatibility and HDR support to meet our customers' demands in different environments.

Delivering HD resolution and high brightness, the Krinda C-WU1200L laser projector offers excellent value for exhibitions, dark rides, night tours, hotels, conference rooms and more.

BEIJING WINCOMN TECHNOLOGY CO.,LTD

86-10-6785 6868
info@wincomn.com
www.wincomn.com
Bldg.7,No.11 Kangding Street,Economic-Technological Development Area,BeiJing,P.R.China

Wincomn

VN—[illegible]

Specifications

Display Technology	• 1 x 0.67"DMD			
Native Resolution	• 1920 x 1200 (2,304,000 pixels)			
Brightness (lumens)	• 12,000 ISO			
Contrast	• Extreme Black Mode: 2,000,000:1			
Color Support	• 1.07 billion with 10Bit color depth technology for richer grayscale and more natural color transitions.			
Projection Size	• 50"~ 300" (Diagonal)			
Lens Throw Ratio	• 0.361 : 1	• 0.65 ~ 0.75 : 1	• 0.75 ~ 0.95 : 1	• 0.95 ~ 1.22 : 1
	• 1.22 ~ 1.52 : 1	• 1.52 ~ 2.92 : 1	• 2.90 ~ 5.50 : 1	
Digital Keystone Adjustment	• Vertical: ± 20°	• Horizontal: ± 20°		
Lens Shift	• Vertical: +/- 50%	• Horizontal: +/- 15%		
Image Format	• 16:10/16:9/4:3/Auto/LBX/Original			
Scan Rates	• Horizontal: 15.375 ~135.0 KHz	• Vertical: 23.98~120 Hz	• 3D: 120 Hz	
Computer Compatible Formats	• 4K, WUXGA, 1080P, UXGA, SXGA+, SXGA, WXGA+, WXGA, 720P, XGA, SVGA, VGA compressed, VESA standard, PC and Mac compatible			
Video Compatible Formats	• HDTV (720p, 1080i/p)	• SDTV (480i/p, 576i/p)		
Signal Input Output Interface	• HDMI 2.0 in x 2	• HDMI 2.0 out x 1	• DVI-D in x 1	• 3G-SDI in x 1
	• HDBaseT x 1	• RS232 x 1	• LAN x 1	• 12V out x 1
	• Remote In x 1	• USB A x 1	• 3D sync in x 1	• 3D sync out x 1
Uniformity	• 90 %			
Audible Noise	• Eco Mode: 37 dB			
Laser Light Source	• Nichia laser modules			
Illumination Performance	• 20,000 hrs			
Power Consumption	• 680 W +/- 15 % @ 220 VAC			
Rated Voltage	• AC 100 ~ 240V, 50/60Hz			
Volume(mm)	• Dimensions: 484 (W) x 207.8 (H) x 529 (D)		• Shipping dimensions: 630 (W) x 390 (H) x 600 (D)	
Weight	• Net Weight: 21 kg	• Shipping Weight: 26.2 kg		
Warranty	• Three years on the projector			



Product Advantages

Efficient Color Management

Krinda C-WU1200L delivers true-to-life color reproduction by fine-tuning color with HSL adjustment, advanced RGB adjustment and Gamma type selection. As a result of multiple color mixing mode of red/green/blue/yellow/cyan/magenta, accurate adjustment of hue, brightness and saturation can be made.



调整前



调整后







– HUE +

HDR Image

HDR offers more dynamic ranges and image details, which can make every dark area darker and richer with more detailed colors, giving movies, pictures, and game graphics a powerful visual effect.




无HDR



有HDR

4K Signal

Supports 4K signal to reliably achieve 4096x2160@60Hz signal input with more natural image and richer detail.

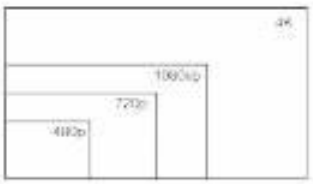

兼容4K



4K(4096*2160)



Geometry Alignment

With the built-in functionality of geometry alignment, it supports horizontal/vertical keystone correction, pincushion correction and 4-corner adjustment to eliminate image distortion, which is ideal for restricted application scenarios, delivering the image as expected.




Warping and Blending

Featuring built-in image warping and edge blending, the Krinda C-WU1200L offers the capability to freely resize the blending area, adjust color performance and projection display. It comes with a blending mode option to achieve perfect consistence of color and brightness over the blending area of multiple projectors.



3D Function

It supports passive and active stereo, and can be interfaced with a variety of 3D devices such as synchronous transmitters and active stereo glasses to transmit 3D signals.

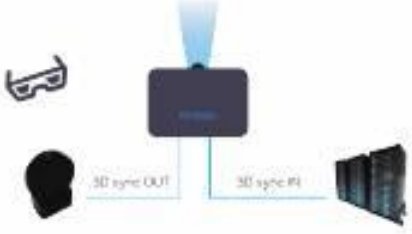

Active Operation

Featuring the technology of active operation and maintenance, it comes with the capability to actively send out information of system changes and wamings, flarther simplifying software connection, and enhancing the timeliness, accuracy and integrity of projector data. The projector also supports Extron IPLink, PJLink protocols, and AMX control systems, etc.

Multi-windowing PBP/PIP


With the built-in multi-windowing PBP/PIP function, when you have multiple interfaces connected to multiple sources and displayed on one screen at the same time, the PBP (Picture By Picture) function displays two screens side by side, while the PIP (Picture In Picture) function downscales some of the screens and displays them on the main one.





Lens Shift


The standard motorized lens allows easy adjustment of the projection screen for lossless horizontal and vertical panning without moving the projector, and also features lens memory, lens lock and lens reset. In addition to the standard motorized lens (1.22-1.52:1), a wide range of optional lenses are also available for customers to choose from depending on the application.

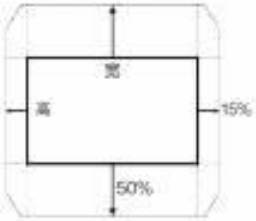



Multiple Interfaces

With a wide range of interfaces, it supports a variety of signal transmissions for better support of 3D and 4K video formats.Integrated with HDBaseT interface, it achieves up to 100 meters transmission distance using normal Category 6 network cable.

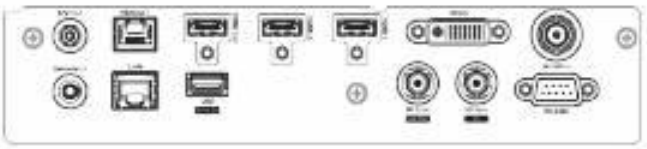

720° Omnidirectional Installation

Capable of 720-degree installation with no decrease or loss of brightness. Supports portrait projection for diverse application scenarios, without limiting your design by the angle of installation.





Projector Enclosure

Its enclosure protects the projector from all kinds of harsh working environments such as high temperature, low temperature, humidity, dryness and dust, ideal for adapting to harsh environments.

