Krinda

LASER PROJECTOR Krinda C-WU800L


Stunning Visuals, Perfect Blending



DLP Chip Technology
8,000 Lumens Brightness
4K Signal Access
Active/Passive 3D
720° Omnidirectional Installation
30,000 Hours Light Source Lifespan

Exhibitions/Enterprise Application and Meeting Rooms/Theme Parks/Attractions/Education and Researches/Live Events and Conferences/Staging Applications and Rental/Hotels

Krinda
C-WU800L

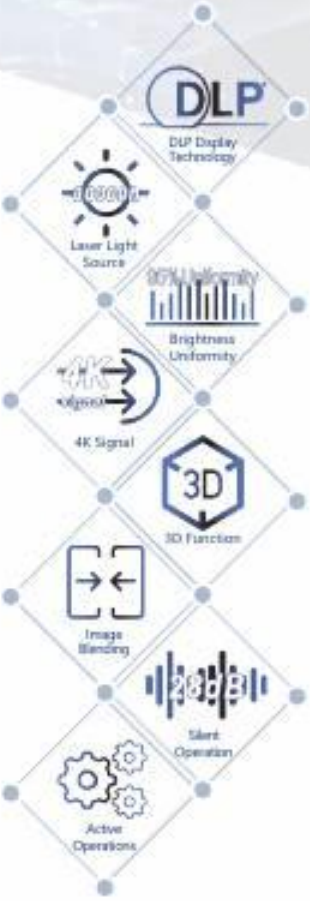

With DLP technology of TI and 0.67" DMD chip, Krinda C-WU800L projector is featured with Brilliantcolor ™ technology to meet customers' specific demands in different kinds of environments. Using Nichia high-efficiency blue laser phosphor and laser light source with an extended service life of up to 30,000 hours, it helps customers achieve additional cost savings in later operation and maintenance. Compatible with 4K signal input and supports active/passive 3D, 720° omnidirectional projection, excellent engineering in heat extraction, supports 7×24 all weather silent operation and USB playback with 2 built-in speakers.

Delivering stunning visuals and perfect blending, C-WU800L is a great value choice for exhibitions, dark rides, night tours, hotels, conference rooms and more.

BEIJING WINCOMN TECHNOLOGY CO.,LTD

86-10-6785 6868
info@wincomn.com
www.wincomn.com
Bldg.7,No.11 Kangding Street,Economic-Technological Development Area,Beijing,P.R.China

Wincomn

Specification

Image	Brightness (lumens)	• 8,000 ISO • 7,500 ANSI
	Color Wheel	• 4 Segments (RGBY)
	Brightness Uniformity	• 95 %
	Contrast (Standard)	• Static contrast ratio:1,200:1 • Dynamic contrast ratio: 100,000:1
Display	Type	• 1 x 0.67 DMD
	Standard Resolution	• 1920 x 1200 (2,304,000 pixels)
	Color Support	• 1.07 Billion (10 Bit) with 10Bit color depth technology for richer grey levels and more natural color transitions.
	Color Enhancement	• Automatic dynamic color processing technology enhances the saturation and accuracy of colors, projecting a saturated and bright image.
	Color Control	• Delivering true-to-life color reproduction by fine-tuning color with HSG Adjustment, advanced RGB adjustment and Gamma correction. As a result of multiple color mixing mode of red/green/blue/yellow/cyan/magenta, accurate color adjustment of hue, brightness and saturation can be made.
Light Source	Type	• High-efficiency blue laser phosphor with BrilliantColor technology.
	Light Source Lifetime	• Normal Mode: 20,000 hrs. • Eco Mode: 30,000 hrs.
	Adjustable Light Source Mode	• Adjustable light source mode available. The constant power mode ensures consistent output power throughout the life of the projector, the constant brightness mode ensures consistent output brightness throughout the life of the projector.
Signal Inputs	Standard	• HDMI 1.4a x 1 • HDMI 2.0 x 1 • VGA x 1 • RS232 Input • RJ45 • USB x 2 (Type A) • HDBaseT
	Signals	• HDTV formats, VGA through to 4K (Resolutions higher or lower than the projector's original resolution will be displayed using intelligent scaling technology). • Horizontal and vertical scaling while maintaining aspect ratio (all inputs).
	3D	• HDMI 1.4a, HDBaseT – Stackable design, top/bottom, side-by-side (up to 120Hz) • 3D Sync input (Sync) – for genlocking projectors • 3D Sync output (Sync) – for genlocking projectors or controlling emitter or polarizer
	Pixel Clock	• 154MHz
	Scan Rates	• Horizontal: 15-91Hz • Vertical: 24-120Hz
Signal Outputs	Monitor Out	• HDMI output x 1
Control & Networking	Control & Networking	• Advanced management software for Wincomn Krinda projectors allowing for more than 255 projectors' management, control, operation and status monitoring, etc. • Control via HDBaseT • Built-in backlit keypad • RS232 • IR remote • RJ45 • Wired remote control (3.5mm interface)
Warping & Blending	Warping & Blending	• 4-corner geometry adjustment, horizontal keystone calibration, vertical keystone calibration.
Image Blending	Image Blending	• Built-in warping and blending, offering the capability to freely resize blending area, adjust color performance for in-area colour filling and projection display. It comes with optional blending mode to achieve perfect consistence of color and brightness of blending of multiple projectors.
Speaker	Built-in Speaker	• 10W (two)
Lenses	Mount *	• Motorized zoom and focus adjustment • Motorized horizontal and vertical shift
	Throw Ratio *	• Lens 1.25-2.0 Zoom
	Zoom Ratio *	• 1.6x
	Lens offsets *	• ±50% Horizontal • ±110% Vertical
	Other Features *	• Lens memory, lens lock and lens reset functions.
	Optional Lenses	• 0.5:1, 0.6:1, 0.7:1, 0.8:1, 0.9:1
Flexibility	Ease-of-operation	• Selectable color - adjusting display color to suit the imaging surface depending on the color of the imaging surface • Remote control setting - Support for up to 99 units with 1 remote control • Multi-window PBP/PIP • USB playback support (picture, audio, video) • Screen Freeze • Adjustable display ratio • Control panel lock • Timed automatic sleep and shutdown
Accessories	Standard	• IR remote with wired remote jack (wire not included) • AC power cord for projector • User manual
Power Requirements	Operating Voltage	• Normal mode: 200-240 VAC @ 50/60Hz
	Power Consumption	• Normal mode: 510W +/-15% • Eco mode: 320w +/-15%
	Stand-by Consumption	• No signal mode < 0.5w • LAN signal mode < 2w • HDBaseT signal mode < 6w
	Operating Current	• Normal mode: 10A (200-240 VAC)
	Dissipation	• Normal mode: 1740 BTU/hr +/-15%
Audible Noise	Audible Noise	• Standard Mode: 30dB (A) • Eco Mode: 28dB (A)
Physical	Size * (mm)	• 486W x 179H x 376D
	Shipping Size (mm)	• 650W x 370H x 560D
	Weight	• 12.7kg
	Shipping Weight	• 16.5kg
Environment	Temperature	• 5-40℃
	Humidity	• 10-85% (Non-condensing)
Warranty	Warranty	• Three years parts and labor on the projector. • Three years on system or 20,000 hours parts and labor.
Certification	Certification	• CCC Certification • Environmental Certification • Energy Conservation Certification

Note: All "*" items, values, descriptions are for cases where standard lenses are used.



Product Advantages

Color Control

Krinda C-WU800L delivers true-to-life color reproduction by fine-tuning color with HSG Adjustment, advanced RGB adjustment and Gamma correction. As a result of multiple color mixing mode of red/green/blue/yellow/cyan/magenta, accurate color adjustment of hue, brightness and saturation can be made.



Before

After








Wider Colour Gamut

Krinda C-WU800L offers a wider colour gamut, produces more enhanced image detail, vibrant color with laser light source plus single DLP technology.





Brightness Uniformity


Thanks to its advanced image processing engine and unrivaled optical electronics, Krinda C-WU800L brings brightness uniformity to a superior level of 95%.

90%

95%

4K Signal

Supports for 4K signal to reliably achieve 4096x2160@60Hz signal input with natural image detail and effectively avoid jaggies.

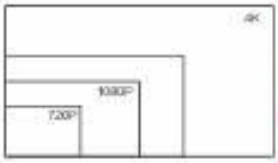

4K Size




4K Image



Lens Shift

The standard motorised lens allows easy adjustment of the projection screen for lossless horizontal and vertical panning without moving the projector, and also features lens memory, lens lock and lens reset. In addition to the standard motorised lens (1.25-2.0:1), a wide range of lenses are also available in 0.5:1, 0.6:1, 0.7:1, 0.8:1 and 0.9:1 for customers to choose from depending on the application.

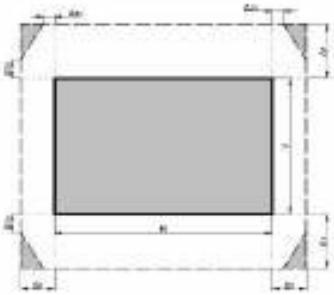



Silent Operation



Equipped with professional-grade heat sink that limiting noise in standard mode to a silent rating of 30dBA, it can be further reduced to a remarkable level of silence – 28dB in Eco mode, which brings this projector to the technological forefront of the industry.

Built-in Speakers



Built-in with two 10W high-quality speakers, Krinda C-WU800L is an excellent choice for scenarios where space is at a premium, and saves costs.

Constant Brightness



Its constant brightness feature ensures the projection remains consistent throughout its lifetime by automatically adjusting the power to maintain a constant brightness level for the best possible experience.

3D Functions

Comes with HDMI1.4a interface, Krinda C-WU800L supports passive and active stereo. It also supports connection with 3D devices such as synchronous transmitters and active stereo glasses to transmit 3D signals.



Active Operations

Featuring industry-leading technology for active operation and maintenance, it comes with the capability to actively send information of system changes and warnings to particular destinations, further simplifying software connection, and enhancing the timeliness, accuracy and integrity of projector data. The projector also supports Extron IPLink, Crestron RoomView, PJLink protocols, and supports AMX control systems.

Warping and Blending

Featuring built-in warping and blending, Krinda C-WU800L offers the capability to freely resize blending area, adjust color performance for in-area colour filling and projection display. It comes with optional blending mode to achieve perfect consistence of color and brightness of blending of multiple projectors.



Multi-window PBP/PIP

With the built-in multi-window PBP/PIP function, when you have multiple interfaces connected to multiple sources and displayed on one screen at the same time, the PBP (picture out of picture) function stitches multiple screens together, while the PIP (picture in picture) function reduces some of the screens and displays them on the screen.



Multiple Interfaces

With a wide range of interfaces, it supports a variety of signal transmissions. HDBaseT interface for better support of 3D and 4K video formats, using normal Category 6 network cable for distances up to 100m transmission.



Projector Enclosure

Its enclosure protects the projector from all kinds of harsh working environments such as high temperature, low temperature, humidity, dryness and dust, ideal for adapting to the demands of harsh environment.



720° Omnidirectional Installation

Capable of 720-degree installation with no decrease or loss of brightness. Supports portrait projection for diverse application scenarios, without limiting your design by the angle of installation.





