
Wincomm

LASER PROJECTOR C-4K650

4K Enhanced, Infinite Excellence

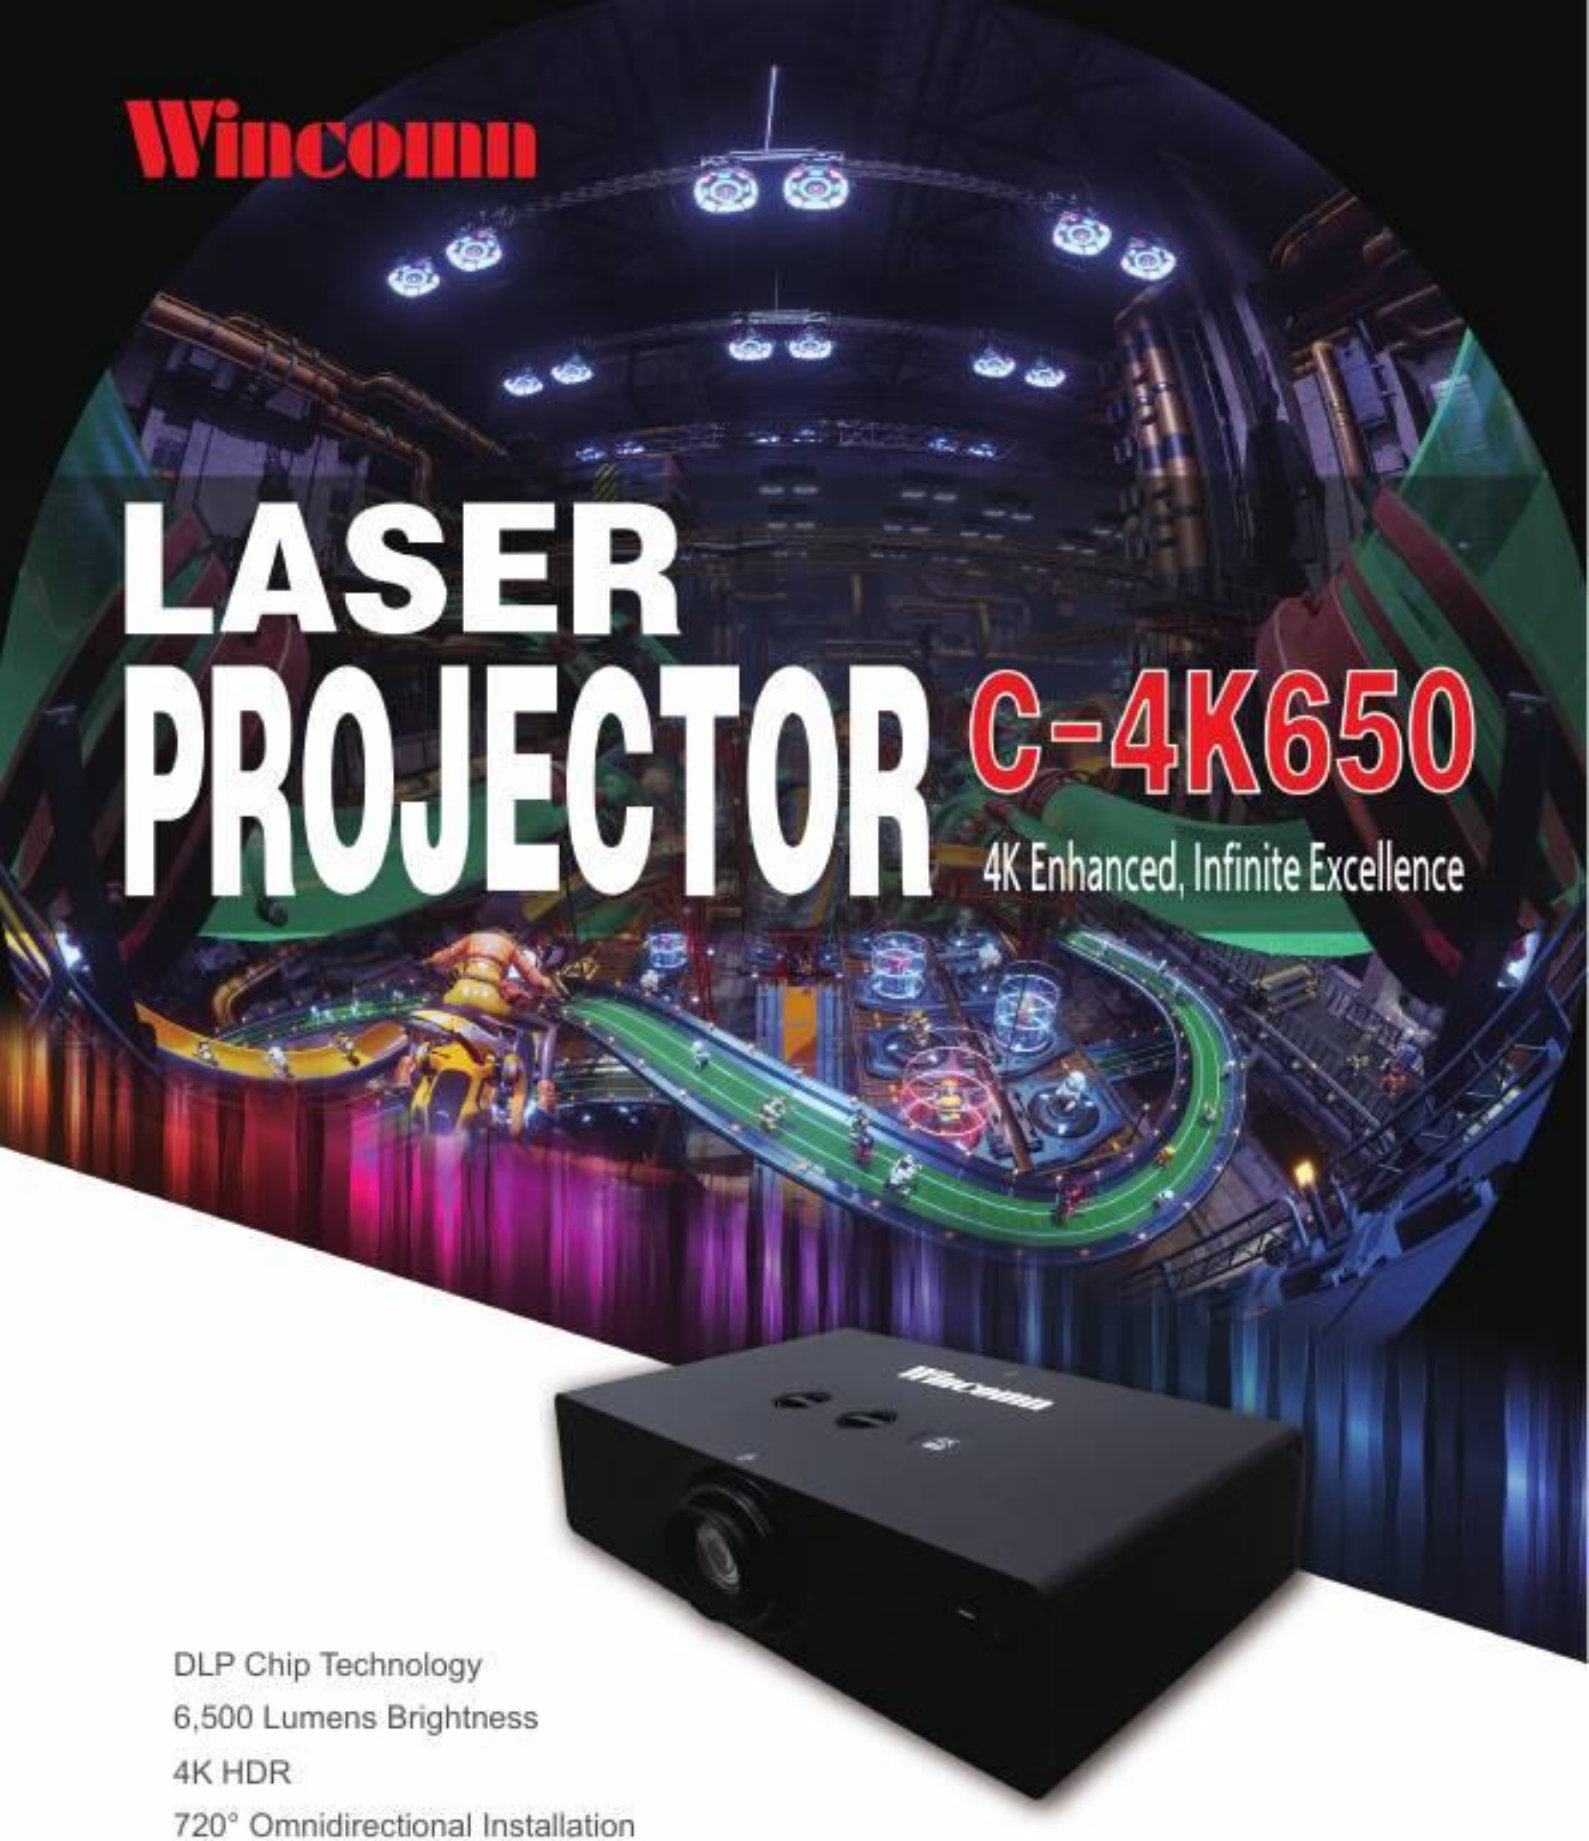

DLP Chip Technology

6,500 Lumens Brightness

4K HDR

720° Omnidirectional Installation

25,000 Hours Light Source Life

Exhibitions / Dark Rides / Night Tours / Hotels / Meeting Rooms

Wincomn C-4K650

Wincomn C-4K650 projector integrates Texas Instruments' DLP technology with a cutting-edge 4K professional-grade DLP chip system, delivering an unparalleled visual experience with true 4K resolution. Designed to meet the most discerning demands for ultra-high-definition clarity, it excels in diverse environments where resolution is paramount. Featuring high-power blue laser technology, it offers an impressive 25,000-hour lifespan, significantly reducing maintenance and operational costs. The C-4K650 supports 720° free-direction projection and boasts an exceptional heat dissipation design, ensuring low-noise, 7*24 round-the-clock operation. Additionally, the projector is equipped with a built-in 15W high-quality speaker, delivering an all-encompassing audiovisual experience.



Featuring an innovative, compact and flexible design with 4K display, Wincomn C-4K650 offers exceptional value and is the ideal choice for a wide range of applications such as exhibitions, dark rides, night tours, hotels, meeting rooms, and more.

Specification

Image	Brightness (lumens)	• Center brightness of 6,500
	Brightness Uniformity	• 90 %
	Contrast (Dynamic)	• 3,000,000:1
Display	Type	• 1 x 0.47 DMD
	Resolution	• 3840 x 2160 (4K)
	Refresh Rate	• 60 Hz
	Color Support	• > 110 % BT.709
	Color Control	• Advanced color calibration feature for RGBCYM and skin tone adjustments.
Light Source	Type	• Laser light source
	Light Source Lifetime	• ≥ 25,000 hrs.
	Adjustable Light Source Mode	• Offers a range of brightness modes for linear adjustment: Bright, Standard, Soft, High Dynamic, and Low Dynamic.
Signal Inputs	Standard	• HDMI 2.0 x 1 • HDMI 2.1 (ARC) x 1 • VGA x 1 • DVI/HDMI x 1 • USB x 2 (Type A) • RS 232 Input/Output • RJ 45 x 1 • Audio Output x 1 • Fiber Optic Output x 1
	Signal	• Resolution ranging from VGA to 4K
Signal Outputs	Monitor Out	• HDMI output x 1
Control & Networking	Control & Networking	• RS 232 (In/Out x 1) and RJ 45 for projector device management, control, maintenance, and status monitoring.
Warping & Blending	Warping & Blending	• Built - in manual calibration, camera - based auto calibration, and multi - point calibration. Optional features include curve correction, custom shape correction, and edge blending.
Speaker	Built-in Speaker	• 15 W x 1
Lenses	Motorized Control	• Motorized zoom and focus adjustment
	Throw Ratio	• 1.0 - 1.6:1 • 0.7 - 0.9:1
	Zoom Ratio	• Motorized focus and zoom 1.6 x/1.2 x
	Lens offsets	• ± 30 % Horizontal • ± 100 % Vertical
	Optional Lenses	• 0.42:1; 0.5:1; 0.67:1; 0.7 - 0.9:1; 1.0 - 1.6:1; 1.6 - 2.6:1
Flexibility	Ease-of-operation	• Supports USB playback (images, audio, video) and includes a multifunctional remote control.
Accessories	Standard	• Remote control, User manual, Power cord, Batteries.
Power Requirements	Operating Voltage	• 100 - 240 VAC @ 50/60 Hz
	Power Consumption	• 430 W ± 10 %
	Standby Mode	• < 0.5 W
	Operating Current	• 2 A
Audible Noise	Audible Noise	• 35 dB
Physical	Size (mm)	• 584 W x 197 H x 307 D (lens not included)
	Shipping Size (mm)	• 711 W x 507 H x 321 D
	Weight	• 12.5 kg
	Shipping Weight	• 15.7 kg
Operating Environment	Temperature	• 5-40 ℃
	Humidity	• 10-85 % (non-condensing)
Warranty	Warranty	• Three years on the projector
Certification	Certification	• CCC Certification • Energy Conservation Certification • Environmental Certification

BEIJING WINCOMN TECHNOLOGY CO.,LTD

86-10-6785 6968
info@wincomn.com
www.wincomn.com
Bldg.7,No.11 Kangding Street,Economic-Technological Development Area,Beijing,P.R.China

Wincomn




PRODUCT ADVANTAGES

4K Display Technology

4K HDR (3840*2160 60Hz) display technology, offering four times the resolution of Full HD. With improved color accuracy and expanded color gamut, HDR (High Dynamic Range) enhances the color contrast and brightness details of the image. It' s not just about the increase in pixel count—it' s a leap forward in color performance.







Color Control

Wincomn C-4K650 delivers a more uniform image in a multiple projector configuration with HSG color fine-tuning and advanced color temperature adjustment. With seven-color calibration, it further ensures improved brightness and color uniformity across multiple projectors.









Geometry Alignment

Supports flexible image aspect ratio adjustments, with built-in 8-point geometric correction and multiple curved surface modes. No matter the display environment, it ensures precise image alignment and projection with ease.









MEMC.HDR

Dynamic range enhancement elevates color saturation and sharpness. Colors appear deeper and more natural, bright areas are more vivid, and the overall depth of the image is enhanced. Additionally, motion blur and trailing effects are eliminated, ensuring smoother and more detailed images in high-speed scenes.




Multiple Display Aspect Ratios

Supports a variety of display aspect ratios to meet different screen requirements (16:9/16:10/2.35:1/1.88:1).



Multiple Interfaces

Equipped with a wide range of professional interfaces, the projector supports multiple signal sources for input and output. It also features automatic power-on functionality, allowing the projector to intelligently recognize and power on when an external signal source is connected, which offers great convenience.

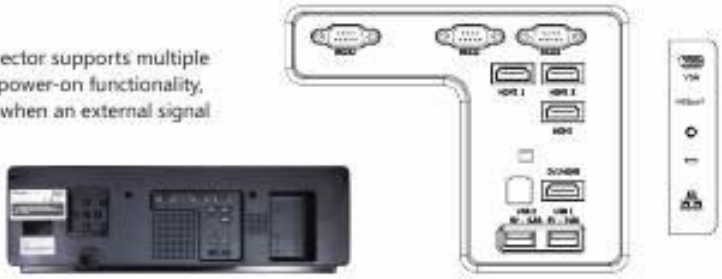

Dust-proof Design

Wincomn C-4K650 is designed with an IP5X dust-proof rating, and the light source has an IP6X dust-proof rating, ensuring reliable and safe operation even in harsh environments.



7×24 Operation

Engineered for 7×24 continuous operation, ensuring long-term stability and reliability. This guarantees high system availability and stable performance over extended use.





720° Omnidirectional Installation

Supports 720° omnidirectional installation without compromising brightness. It also supports portrait projection, offering diverse applications and ensuring that your design is not limited by installation angles.



Unique Heat Dissipation Structure

The unique airflow cooling design is ideal for close-range multi-unit installations, ensuring efficient heat dissipation.

