

(19)



(11)

EP 2 040 597 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.11.2011 Bulletin 2011/44

(51) Int Cl.:
A47L 5/24 (2006.01) **A47L 9/22** (2006.01)
A47L 9/28 (2006.01) **A47L 9/32** (2006.01)

(21) Application number: **07733475.3**

(86) International application number:
PCT/GB2007/002524

(22) Date of filing: **05.07.2007**

(87) International publication number:
WO 2008/009883 (24.01.2008 Gazette 2008/04)

(54) **A CLEANING APPLIANCE**

REINIGUNGSUTENSIL

APPAREIL DE NETTOYAGE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **18.07.2006 GB 0614235**

(43) Date of publication of application:
01.04.2009 Bulletin 2009/14

(73) Proprietor: **Dyson Technology Limited
Malmesbury Wiltshire SN16 0RP (GB)**

(72) Inventors:
• **DYSON, James
Malmesbury Wiltshire SN16 0RP (GB)**

• **HICKMOTT, Richard, Morgan
Malmesbury Wiltshire SN16 0RP (GB)**
• **GAMMACK, Peter, David
Malmesbury Wiltshire SN16 0RP (GB)**

(74) Representative: **Hucker, Nerys et al
Dyson Technology Limited
Intellectual Property Department
Tetbury Hill
Malmesbury
Wiltshire SN16 0RP (GB)**

(56) References cited:
GB-A- 795 118 GB-A- 2 276 311
JP-A- 5 192 270 JP-A- 62 290 431
JP-A- 63 296 718 JP-A- 2004 041 760

EP 2 040 597 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a hand-held cleaning appliance. More particularly, the invention relates to a hand-held vacuum cleaner.

[0002] Hand-held vacuum cleaners are known from, for example, GB 1 207 278. This document discloses a hand-held vacuum cleaner having an elongate main body with an air inlet, a suction conduit and a dust bag for separating dirt and dust from an airflow. A motor and fan assembly is provided in the main body together with a power source. A handgrip is located on the upper part of the hand-held vacuum cleaner. The handgrip extends parallel to the elongate main body at a shallow angle to the suction conduit, and both the airflow generator and the power source are located in the main body underneath the handgrip. JP 2004-041760 discloses a hand-held vacuum cleaner having a similar handgrip arrangement. However, in this case, the motor and fan assembly and the power source of the hand-held vacuum cleaner are arranged so that the centre of gravity of the machine is located at the centre of the handgrip.

[0003] An alternative arrangement of handgrip is shown in US 1,871,624. This document discloses a hand-held vacuum cleaner having a cylindrical main body and a handgrip arranged at one end. A curved suction conduit is located at an end opposite to the handgrip. The handgrip is arranged transversely to the longitudinal axis of the cylindrical main body and approximately parallel to the suction conduit. This arrangement may give the user a stronger wrist position in use than the handgrip arrangements disclosed in GB 1 207 278 and JP 2004-041760. However, the heavy components of the vacuum cleaner (for example, the motor and fan assembly) are located forwardly of the handgrip relative to a user's hand when the vacuum cleaner is in use. Therefore, the centre of mass of the respective hand-held vacuum cleaner will be located forwardly of the handgrip. This may result in the hand-held vacuum cleaner described above being tiring and uncomfortable to use because the user will have to exert additional effort in order to maintain the hand-held vacuum cleaner in a fixed orientation. By way of further background, GB795118 describes a handheld vacuum cleaner which has a battery pack housed in an upright handle and a suction port arranged at right angles to the top of the handle. Dirt sucked into the suction port is deposited into a bag located below the suction port.

[0004] It is an object of the present invention to provide a hand-held vacuum cleaner which is easier to manipulate in use than known arrangements. It is a further object of the present invention to provide a hand-held vacuum cleaner in which the arrangement of the handgrip, the motor and fan assembly and the power source allow the hand-held vacuum cleaner to be manipulated easily and comfortably.

[0005] The invention provides a hand-held cleaning appliance comprising a suction conduit, an airflow generator for generating an airflow along the suction conduit,

separating apparatus in communication with the suction conduit for separating dirt and dust from the airflow, a handgrip for enabling a user to manoeuvre the hand-held cleaning appliance, the handgrip having a first end and a second end and a longitudinal axis, and a power source arranged adjacent the second end of the handgrip for supplying power to the airflow generator, wherein the airflow generator is arranged directly adjacent the first end of the handgrip, the longitudinal axis passes through at least a part of the airflow generator and the handgrip lies between the airflow generator and the power source. By providing such an arrangement, when a user grips the handgrip, the small resulting moment between the centre of mass of each of these components and the user's hand results in a hand-held vacuum cleaner which is easier to manipulate in use.

[0006] Preferably, the power source is arranged directly adjacent the second end of the handgrip. This arrangement allows the hand-held vacuum cleaner to be used easily and comfortably by a user.

[0007] More preferably, the handgrip has a longitudinal axis which passes through at least a part of the power source.

[0008] Preferably, the suction conduit has a suction opening which is located remote from the handgrip. More preferably, the separating apparatus is located between the suction opening and the handgrip. Such an arrangement is compact and convenient to use.

[0009] An embodiment of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is an isometric view of a hand-held vacuum cleaner according to the invention;

Figure 2 is a partially cut-away side view of the hand-held vacuum cleaner of Figure 1; and

Figure 3 is a plan view of the hand-held vacuum cleaner of Figure 1.

[0010] Figure 1 shows a hand-held vacuum cleaner 10. The hand-held vacuum cleaner 10 comprises a main body 12. The main body 12 includes a suction conduit 14 having a suction opening 16. The main body 12 also includes cyclonic separating apparatus 18 for separating dirt and dust from an airflow drawn in through the suction opening 16. The cyclonic separating apparatus 18 is in communication with the suction conduit 14 and the suction opening 16. The cyclonic separating apparatus 18 comprises an upstream cyclone 20 and a plurality of downstream cyclones 22 but further detail is not material to the invention and therefore will not be described.

[0011] The main body 12 further includes a motor housing 24 having a plurality of exhaust vents 26 formed therein. A flowpath extends from the suction opening 16, through the suction conduit 14, the cyclonic separating apparatus 18 and the motor housing 24 to the exhaust

vents 26. A handgrip 28 is located below the motor housing 24 for manipulating the hand-held vacuum cleaner 10 when in use. The handgrip 28 is arranged so that the cyclonic separating apparatus 18 is located between the handgrip 28 and the suction opening 16. The handgrip 28 includes a trigger switch 30 which is positioned on the side of the handgrip 28 closest to the suction opening 16 such that the trigger switch 30 can be manipulated by a user's index finger. A power source 32 is connected to the handgrip 28 through a mounting portion 34.

[0012] Figure 2 shows the hand-held vacuum cleaner 10 in more detail. An airflow generator 36 is located in the motor housing 24. In this embodiment, the airflow generator 36 takes the form of a motor and fan assembly. The airflow generator 36 has an inlet 38 and an outlet 40. A pre-motor filter 42 is located upstream of the inlet 38 for filtering fine particulates from the airflow. A post-motor filter 44 is located downstream of the outlet 40. The pre-motor filter 42 and the post-motor filter 44 are located in the flowpath.

[0013] The handgrip 28 takes the form of an elongate handle and has a first end 46, a second end 48 and an axis X-X. The first end 46 of the handgrip 28 is connected to the motor housing 24. The airflow generator 36 is located adjacent the first end 46 of the handgrip 28. In this embodiment, the handgrip 28 and the airflow generator 36 are arranged such that the axis X-X of the handgrip 28 passes through at least a part of the airflow generator 36.

[0014] The mounting portion 34 removably receives the power source 32. When fitted to the hand-held vacuum cleaner 10, the power source 32 is located directly adjacent the second end 48 of the handgrip 28. In this embodiment, the power source 32 and the handgrip 28 are arranged so that the axis X-X passes through at least a part of the power source 32.

[0015] In other words, the handgrip 28 is arranged to lie between the airflow generator 36 and the power source 32. In this embodiment, the axis X-X passes through at least a part of each of the airflow generator 36 and the power source 32. Further, the axis X-X of the handgrip 28 lies transverse to a longitudinal axis Y-Y of the suction conduit 12. The longitudinal axis Y-Y passes through the suction opening 16. In this embodiment, the axis X-X is arranged at an angle to the longitudinal axis Y-Y which is close to 90°. This arrangement feels comfortable for a user.

[0016] The trigger switch 30 is located towards the first end 46 of the handgrip 28. The trigger switch 30 is located between the power source 32 and the airflow generator 36 and is capable of switching the airflow generator 36 on or off. The trigger switch has on and off positions. The trigger switch moves from left to right as seen in Figure 2. The off position is located to the left, and the on position to the right. In the off position the trigger switch 30 is in an open state and the airflow generator 36 will be switched off. In the on position the trigger switch 30 will be closed and the airflow generator 36 will be switched

on. The trigger switch 30 includes a spring 50 which biases the trigger switch 30 towards a normally open state. This arrangement allows the trigger switch 30 to be operated easily by a user's index finger. This in turn allows the hand-held vacuum cleaner 10 to be operated with one hand.

[0017] In use, a user grips the handgrip 28 to manipulate the hand-held vacuum cleaner 10 in use. When the user squeezes the trigger switch 30, the airflow generator 36 operates. The user must maintain pressure on the trigger switch 30 in order to keep the airflow generator 36 operating. This means that the user is likely to release the trigger switch 30 when he or she does not require a cleaning action, e.g. when moving from one room to another. If the user releases the trigger switch 30, the spring 50 will bias the trigger switch 30 to the off position and operation of the airflow generator 36 will cease. This reduces unnecessary use of the airflow generator 36 and results in a saving of battery life and motor life.

[0018] When operating, the airflow generator 36 draws a flow of dirt- and dust-laden air into the suction opening 16, through the suction conduit 14 and into the cyclonic separating apparatus 18. Dirt- and dust-laden air enters the upstream cyclone 20 and larger dirt and dust particles are separated by cyclonic motion. These particles are then collected in the upstream cyclone 20.

[0019] The partially-cleaned airflow then enters the plurality of downstream cyclones 22. The downstream cyclones 22 are able to separate smaller particles of dirt and dust from the partially-cleaned airflow than the upstream cyclone 20. The cleaned air exits the cyclonic separating apparatus 16 and passes sequentially through the pre-motor filter 42, the airflow generator 36 and the post-motor filter 44 before being exhausted from the hand-held vacuum cleaner 10 through the exhaust vents 26.

[0020] In use, a user may wish to clean a variety of surfaces which may be orientated at different angles. Therefore, a user will need to lift and move the hand-held vacuum cleaner 10 into a variety of positions and orientations in order to clean effectively. The location of the handgrip 28 between the airflow generator 36 and the power source 32 allows the hand-held vacuum cleaner 10 to be manipulated easily in use. This is because the user's hand will be located between the two heaviest components of the hand-held vacuum cleaner 10. This results in a "dumbbell-like" configuration in which the weight of the hand-held vacuum cleaner 10 is distributed on both sides of the user's hand.

[0021] The transverse arrangement of the longitudinal axis Y-Y of the suction conduit 14 with respect to the axis X-X of the handgrip 28 results in the suction conduit 12 forming a substantially straight extension of the user's forearm when the user's wrist is essentially straight. This arrangement feels comfortable for the user, especially when the hand held vacuum cleaner 10 is used for a period of time. Further, the location of the longitudinal axis Y-Y of the suction conduit 14 close to the centre of

the hand-held vacuum cleaner 10 means that the longitudinal axis Y-Y of the suction conduit 14 will be coincident, or close to, the longitudinal axis of rotation of the user's forearm. This results in little or no axial displacement of the suction opening 14 when the hand-held vacuum cleaner 10 is rotated.

[0022] The invention is not limited to the features of the specific embodiment described above. Variations will be apparent to the person skilled in the art. For example, the specific locations of the airflow generator or power source may be varied. The airflow generator may lie above or below the handgrip. Additionally, the power source may lie directly adjacent the second end of the handgrip. The power source may lie above or below the handgrip. What is important is that the airflow generator lies directly adjacent a first end of the handgrip and the power source lies adjacent a second end of the handgrip.

[0023] The angular relationship between the longitudinal axis of the suction conduit and the axis of the handgrip can be varied. It is preferred that the angle between the longitudinal axis of the suction conduit and the axis of the handgrip is in the range of 80 to 90°. However, what is important is that these axes are transverse to one another such that the manipulation of the hand-held vacuum cleaner by a user feels comfortable.

[0024] A cyclonic separating unit need not be used. Other separating apparatus such as a bag-type filter could be used. Further, the hand-held vacuum cleaner need not be fitted with a rechargeable power source. Standard batteries or a power lead could be used. Further, the invention is not limited to hand-held vacuum cleaners. Other types of hand-held cleaning appliances could be used, for example, carpet shampooers, wet and dry machines or blower vacuum devices.

Claims

1. A hand-held cleaning appliance (10) comprising a suction conduit (14), an airflow generator (36) for generating an airflow along the suction conduit (14), separating apparatus (18) in communication with the suction conduit (14) for separating dirt and dust from the airflow, a handgrip (28) for enabling a user to manoeuvre the hand-held cleaning appliance (10), the handgrip (28) having a first end (46), a second end (48) and a longitudinal axis, wherein the airflow generator (36) is arranged directly adjacent the first end (46) of the handgrip (28), the cleaning appliance (10) being **characterised by** a power source (32) arranged adjacent the second end (48) of the handgrip (28) for supplying power to the airflow generator (36), the longitudinal axis passes through at least a part of the airflow generator (36) and the handgrip (28) lies between the airflow generator (36) and the power source (32).

2. A hand-held cleaning appliance according to claim

1, wherein the power source (32) is arranged directly adjacent the second end (48) of the handgrip (28).

3. A hand-held cleaning appliance according to claims 1 or 2, wherein the longitudinal axis passes through at least a part of the power source (32).

4. A hand-held cleaning appliance according to any one of the preceding claims, wherein the airflow generator (36) is arranged above the handgrip (28) and the power source (32) is arranged below the handgrip (28).

5. A hand-held cleaning appliance according to any one of the preceding claims, wherein the suction conduit (14) has a suction opening (16) which is located remote from the handgrip (28).

6. A hand-held cleaning appliance according to claim 5, wherein the separating apparatus (18) is located between the suction opening (16) and the handgrip (28).

7. A hand-held cleaning appliance according to any one of the preceding claims, wherein a trigger switch (30) is located on the handgrip (28) for switching the airflow generator (36) on or off.

8. A hand-held cleaning appliance according to claims 5 and 7, wherein the trigger switch (30) is located on the side of the handgrip (28) which is closest to the suction opening (16).

9. A hand-held cleaning appliance according to claim 7 or 8, wherein the trigger switch (30) includes resilient means (50) for biasing the trigger switch (30) into an off position.

10. A hand-held cleaning appliance according to any one of the preceding claims, wherein the power source (32) is removably attached to the second end (48) of the handgrip (28).

11. A hand-held cleaning appliance according to any one of the preceding claims, wherein the separating apparatus (18) comprises a cyclonic separator.

12. A hand-held cleaning appliance according to any one of the preceding claims, wherein the hand-held cleaning appliance is a hand-held vacuum cleaner.

Patentansprüche

1. Handreinigungsgerät (10), das aufweist: einen Ansaugkanal (14); einen Luftstromerzeuger (36) für das Erzeugen eines Luftstromes längs des Ansaugkanals (14); eine Abscheidevorrichtung (18) in Ver-

- bindung mit dem Ansaugkanal (14) für das Abschneiden von Schmutz und Staub aus dem Luftstrom; einen Handgriff (28), damit ein Benutzer das Handreinigungsgerät (10) handhaben kann, wobei der Handgriff (28) ein erstes Ende (46), ein zweites Ende (48) und eine Längsachse aufweist, wobei der Luftstromerzeuger (36) direkt benachbart dem ersten Ende (46) des Handgriffes (28) angeordnet ist, wobei das Reinigungsgerät (10) **dadurch gekennzeichnet ist, dass** eine Stromquelle (32) benachbart dem zweiten Ende (48) des Handgriffes (28) für das Zuführen von Strom zum Luftstromerzeuger (36) angeordnet ist, wobei die Längsachse durch mindestens einen Teil des Luftstromerzeugers (36) gelangt und der Handgriff (28) zwischen dem Luftstromerzeuger (36) und der Stromquelle (32) liegt.
2. Handreinigungsgerät nach Anspruch 1, bei dem die Stromquelle (32) direkt benachbart dem zweiten Ende (48) des Handgriffes (28) angeordnet ist.
 3. Handreinigungsgerät nach Anspruch 1 oder 2, bei dem die Längsachse durch mindestens einen Teil der Stromquelle (32) verläuft.
 4. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem der Luftstromerzeuger (36) oberhalb des Handgriffes (28) angeordnet ist, und bei dem die Stromquelle (32) unterhalb des Handgriffes (28) angeordnet ist.
 5. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem der Ansaugkanal (14) eine Ansaugöffnung (16) aufweist, die entfernt vom Handgriff (28) angeordnet ist
 6. Handreinigungsgerät nach Anspruch 5, bei dem die Abscheidevorrichtung (18) zwischen der Ansaugöffnung (16) und dem Handgriff (28) angeordnet ist.
 7. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem ein Auslöseschalter (30) am Handgriff (28) für das Ein- oder Ausschalten des Luftstromerzeugers (36) angeordnet ist.
 8. Handreinigungsgerät nach Anspruch 5 und 7, bei dem der Auslöseschalter (30) an der Seite des Handgriffes (28) angeordnet ist, die der Ansaugöffnung (16) am nächsten ist.
 9. Handreinigungsgerät nach Anspruch 7 oder 8, bei dem der Auslöseschalter (30) eine Federeinrichtung (50) für das Vorspannen des Auslöseschalters (30) in eine Aus-Position umfasst.
 10. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem die Stromquelle (32) am zweiten Ende (48) des Handgriffes (28) entfernbar

angebracht ist.

11. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem die Abscheidevorrichtung (18) einen Zyklonabscheider aufweist.
12. Handreinigungsgerät nach einem der vorhergehenden Ansprüche, bei dem das Handreinigungsgerät ein Handstaubsauger ist.

Revendications

1. Appareil de nettoyage à main (10), comprenant un conduit d'aspiration (14), un générateur d'un écoulement d'air (36) pour produire un écoulement d'air le long du conduit d'aspiration (14), un dispositif de séparation (18), en communication avec le conduit d'aspiration (14), pour séparer les saletés et les poussières de l'écoulement d'air, une poignée (28) pour permettre à un utilisateur de manoeuvrer l'appareil de nettoyage à main (10), la poignée (28) comportant une première extrémité (46), une deuxième extrémité (48) et un axe longitudinal, le générateur de l'écoulement d'air (36) étant agencé en un emplacement directement adjacent à la première extrémité (46) de la poignée (28), l'appareil de nettoyage (10) étant **caractérisé par** une source d'énergie (32) agencée près de la deuxième extrémité (48) de la poignée (28), pour alimenter en énergie le générateur de l'écoulement d'air (36), l'axe longitudinal passant à travers au moins une partie du générateur de l'écoulement d'air (36) et la poignée (28) étant agencée entre le générateur de l'écoulement d'air (36) et la source d'énergie (32).
2. Appareil de nettoyage à main selon la revendication 1, dans lequel la source d'énergie (32) est agencée en un emplacement directement adjacent à la deuxième extrémité (48) de la poignée (28).
3. Appareil de nettoyage portable selon les revendications 1 ou 2, dans lequel l'axe longitudinal passe à travers au moins une partie de la source d'énergie (32).
4. Appareil de nettoyage à main selon l'une quelconque des revendications précédentes, dans lequel le générateur de l'écoulement d'air (36) est agencé au-dessus de la poignée (28), la source d'énergie (32) étant agencée au-dessous de la poignée (28).
5. Appareil de nettoyage à main selon l'une quelconque des revendications précédentes, dans lequel le conduit d'aspiration (14) comporte une ouverture d'aspiration (16) agencée en un emplacement éloigné de la poignée (28).

6. Appareil de nettoyage à main selon la revendication 5, dans lequel le dispositif de séparation (18) est agencé entre l'ouverture d'aspiration (16) et la poignée (28). 5
7. Appareil de nettoyage à main selon l'une quelconque des revendications précédentes, dans lequel un interrupteur de déclenchement (30) est agencé sur la poignée (28) pour brancher et débrancher le générateur de l'écoulement d'air (36). 10
8. Appareil de nettoyage à main selon les revendications 5 et 7, dans lequel l'interrupteur de déclenchement (30) est agencé sur le côté de la poignée (28) le plus proche de l'ouverture d'aspiration (16). 15
9. Appareil de nettoyage à main selon les revendications 7 ou 8, dans lequel l'interrupteur de déclenchement (30) englobe un moyen élastique (50) pour pousser l'interrupteur de déclenchement (30) dans une position débranchée. 20
10. Appareil de nettoyage à main selon l'une quelconque des revendications précédentes, dans lequel la source d'énergie (32) est fixée de manière amovible sur la deuxième extrémité (48) de la poignée (28). 25
11. Appareil de nettoyage à main selon l'une quelconque des revendications précédentes, dans lequel le dispositif de séparation (18) comprend un séparateur à cyclone. 30
12. Appareil de nettoyage selon l'une quelconque des revendications précédentes, dans lequel l'appareil de nettoyage à main est un aspirateur à main. 35

40

45

50

55

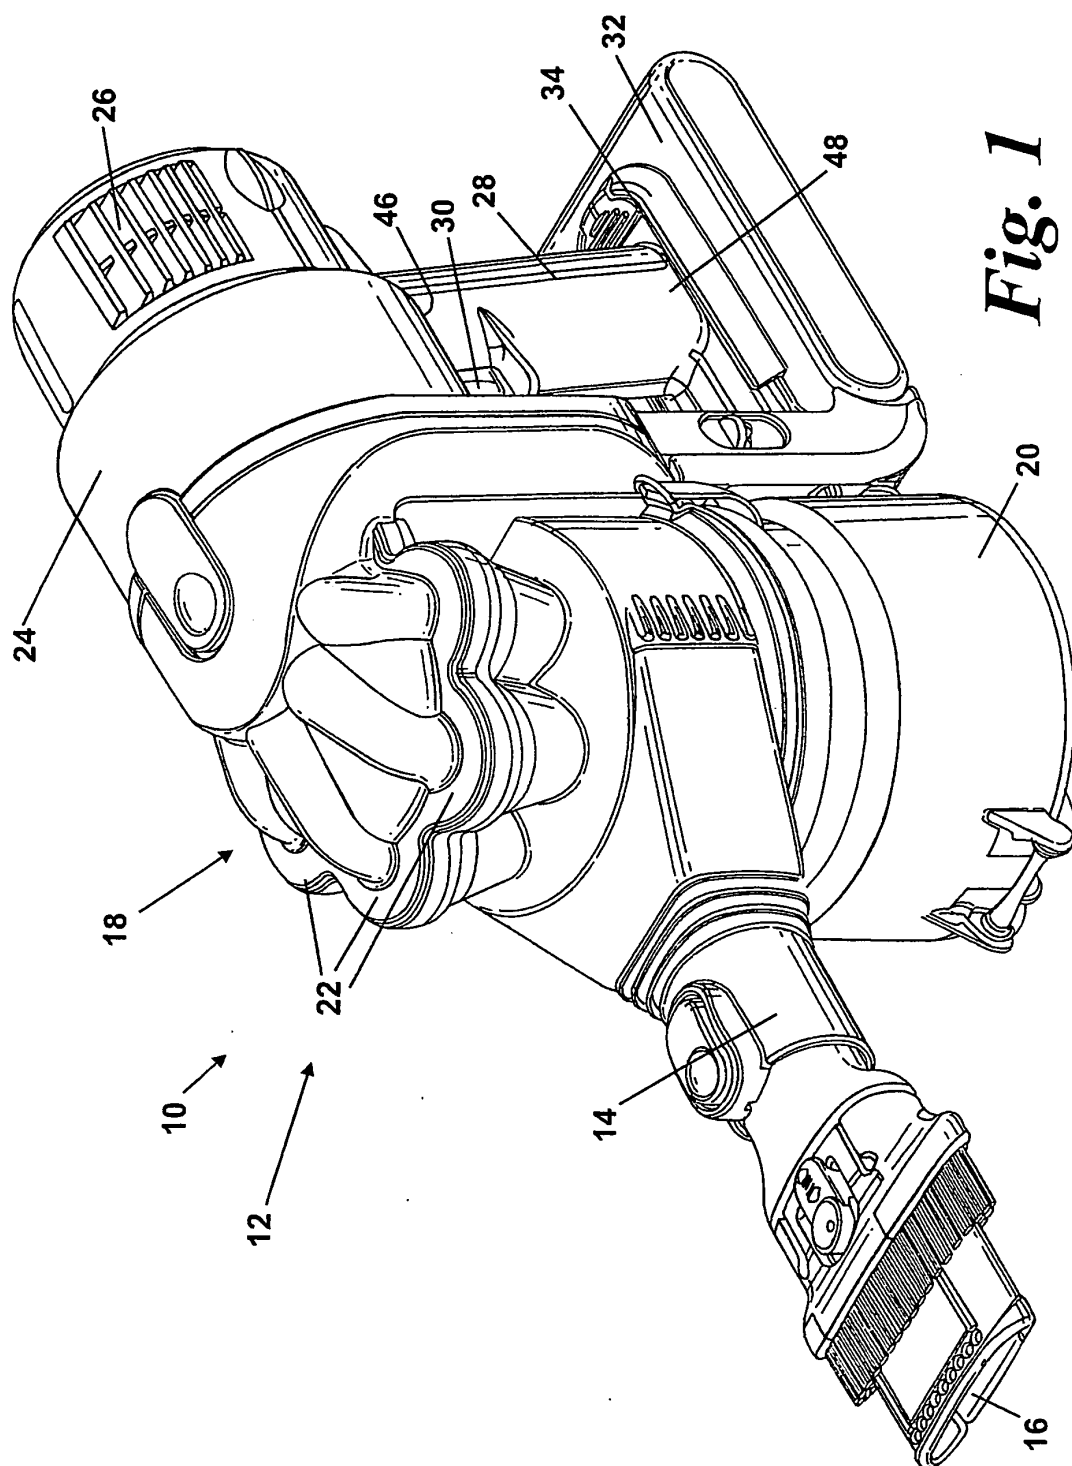


Fig. 1

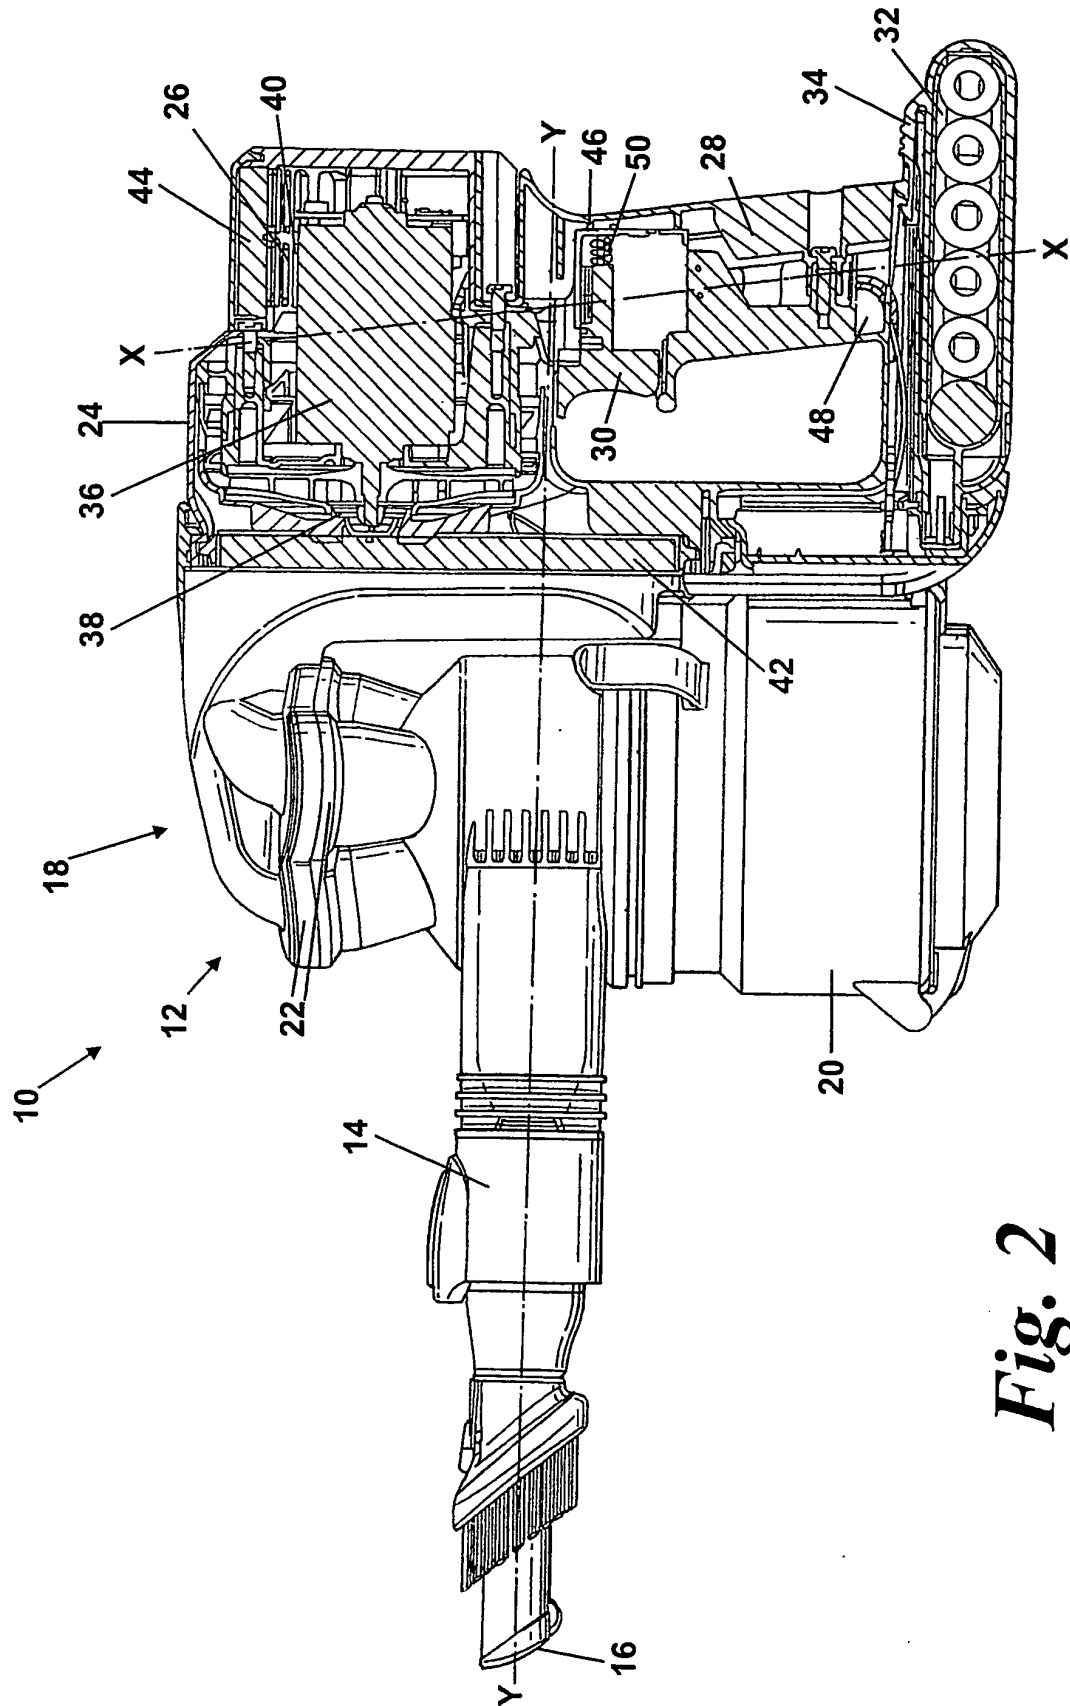


Fig. 2

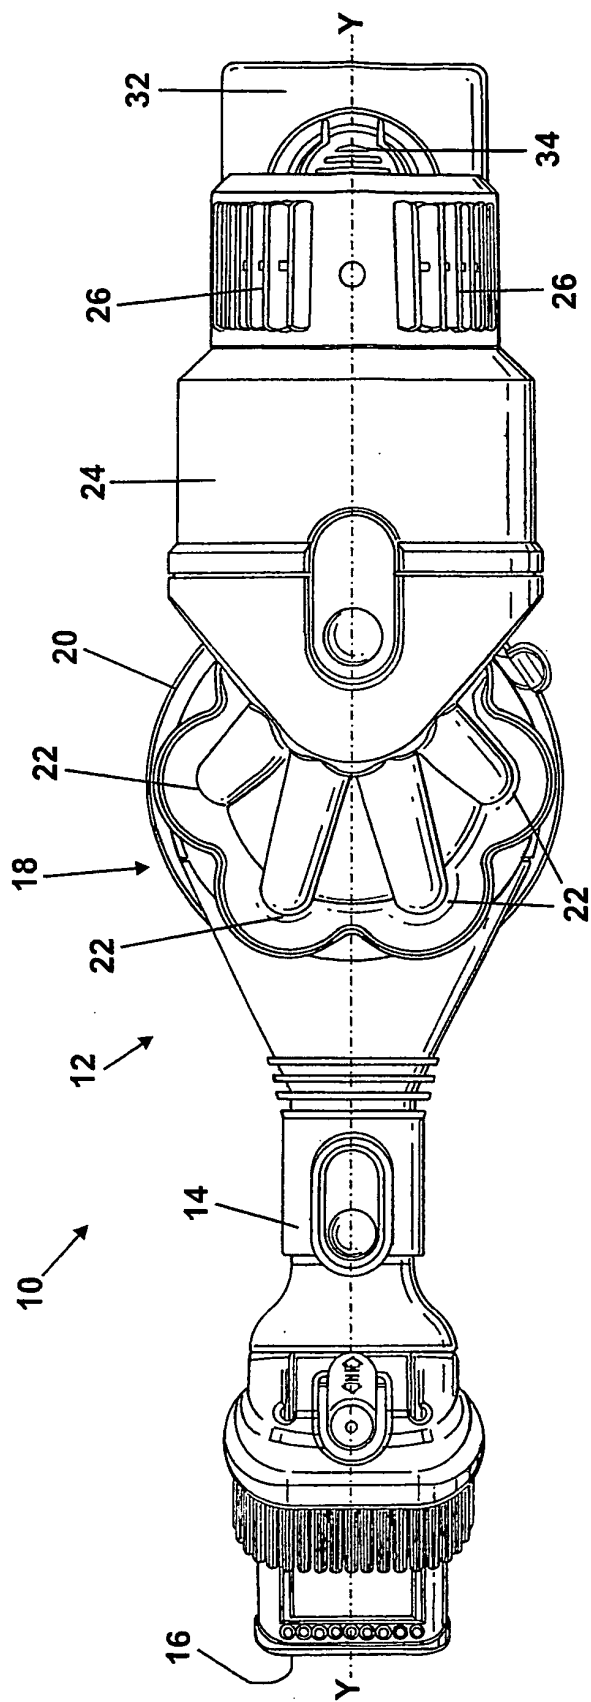


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 1207278 A [0002] [0003]
- JP 2004041760 A [0002] [0003]
- US 1871624 A [0003]
- GB 795118 A [0003]