
Tension and Compression Load Cell

ATO-LCC-DYMH-103

Tension and compression load cell can bear both tension and pressure, with good anti-eccentric load performance, low height, all sealed structure and complete specifications. Miniature load cell is suited to use in restricted spaces, such as using in vehicle/test instrument/laminator measurement and control.



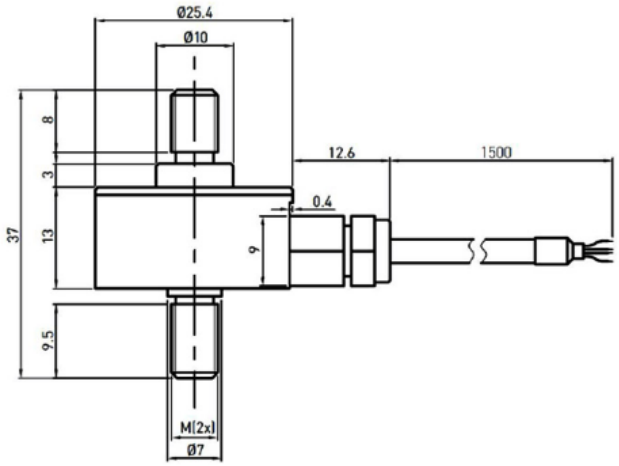

Dimension:

Capacity	M
5kg, 10kg, 15kg, 20kg, 30kg, 50kg	M5
60kg, 100kg	M6
200kg	M8

Specification:

Model	ATO-LCC-DYMH-103
Weight	0.1kg
Capacity range	0kg~200kg
Accuracy	0.3%F.S (linearity + hysteresis + repeatability)
Sensitivity	1.0~1.5mV/V
Creep	±0.05%F.S/30min
Zero output	±1%F.S
Temperature effect on zero	±0.05%F.S/10℃
Temperature effect on output	±0.05%F.S/10℃
Operating temperature	-30℃~+70℃
Input impedance	400±10Ω
Output impedance	350±10Ω
Insulation resistance	≥5000MΩ
Safety overload	150%F.S
Overload limit	200%F.S
Bridge voltage	DC 10-15V, suggest DC 10V
Material	Stainless steel
Protection class	IP67
Cable length	2-6m
Wiring	EXC+: Red, EXC-: Black, SIG+: Green, SIG-: White