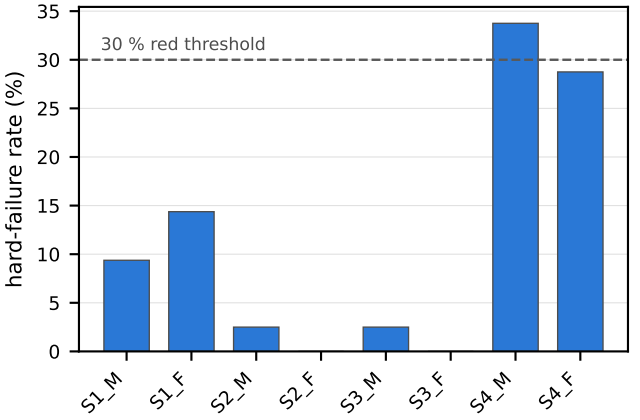
(a) Hard failures per cell (diverged + implausible), run-level, 160 runs per cell
30 % red threshold
hard-failure rate (%)
0
5
10
15
20
25
30
35
S1_M
S1_F
S2_M
S2_F
S3_M
S3_F
S4_M
S4_F

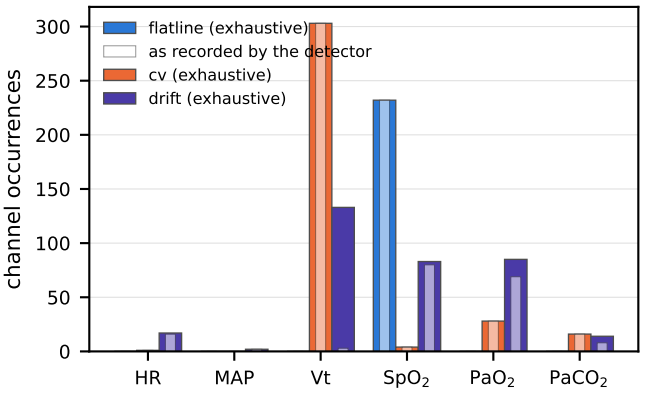
(b) not_steady_state triggers per output; non-exclusive, so the total exceeds the flagged runs
flatline (exhaustive)
as recorded by the detector
cv (exhaustive)
drift (exhaustive)
channel occurrences
0
50
100
150
200
250
300
HR
MAP
Vt
SpO2
PaO2
PaCO2

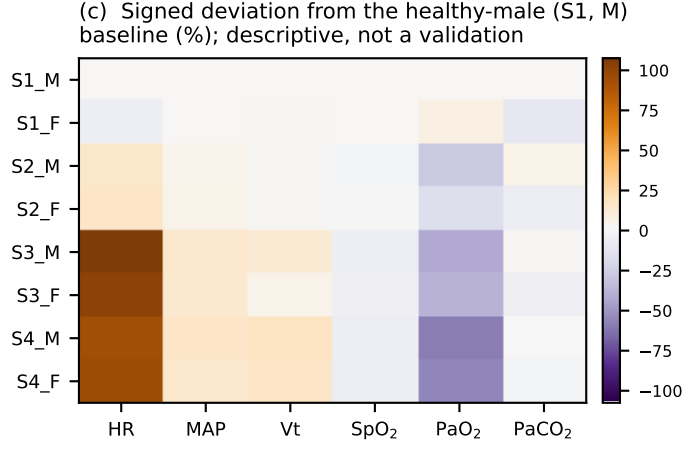
(c) Signed deviation from the healthy-male (S1, M) baseline (%); descriptive, not a validation
S1_M
S1_F
S2_M
S2_F
S3_M
S3_F
S4_M
S4_F
HR
MAP
Vt
SpO2
PaO2
PaCO2
100
75
50
25
0
−25
−50
−75
−100

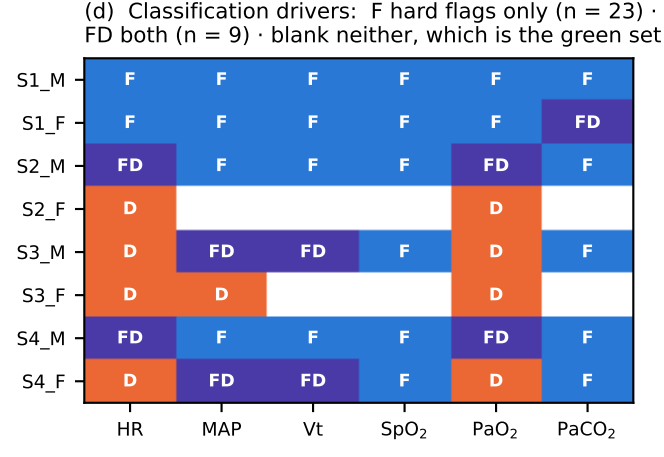
(d) Classification drivers: F hard flags only (n = 23) · D deviation only (n = 9) FD both (n = 9) · blank neither, which is the green set (n = 7)
S1_M F F F F F F
S1_F F F F F F FD
S2_M FD F F F FD F
S2_F D D
S3_M D FD FD F D F
S3_F D D D
S4_M FD F F F FD F
S4_F D FD FD F D F
HR
MAP
Vt
SpO2
PaO2
PaCO2